

REV. 2  
DCO 102710


COIL: @ 25°C	
RESISTANCE	170 OHMS ±10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.7 VDC
MUST RELEASE	5.4 VDC MAX, 1.2 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX.
	RELEASE BOUNCE 5 MS MAX.

CUST. _____	OPL _____
CUST. NO. M5757/23-037	REV. _____

CUSTOMER DATA SHEET

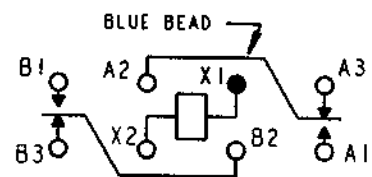

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 HZ RESISTIVE
	50,000 OPERATIONS

DR. BSH 8/17/01 CK. TLG 8-17-01

**CII Technologies**  
advanced control electronic solutions

"07" RELAY

B07D632BZ2-0353