MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BA-2RQ1T

(M) BA-2RQ1T ISSUE 1

M BA-2RQ1T PAGE 1 OF 1

DRAWING NUMBER | RELEASE NO. | REPLACES | ISSUE 8 | CHECK

REVISIONS

A	CO14866	R E R 20 SEP 60
B	CO-34311	J A L 20 JAN 75
C	CO 45448	S L B 15 FEB 79
D	CO-69351-D	JWB 18 JUL 91
E	CO 77590	SAD JUN 94
F	CO-82133	CSL 26 JUL 96
G	C093346	D L T 25 AUG 98

CHECK | CHECK | CHECK

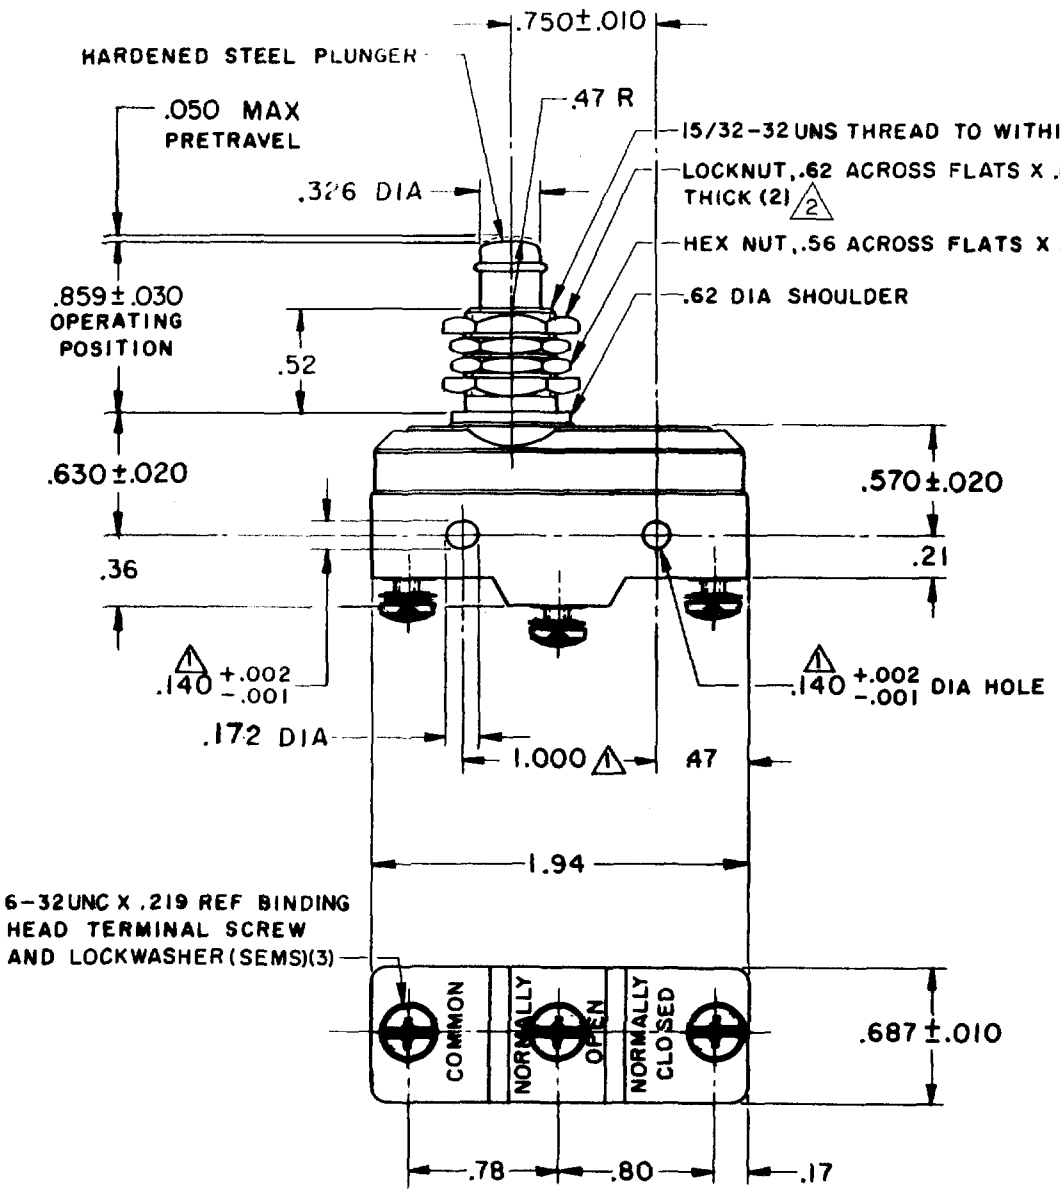

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - - - 14-22 OZ

RELEASE FORCE - - - - - - - 10 OZ MIN

DIFFERENTIAL TRAVEL - - - .002-.0075

OVERTRAVEL - - - - - - - - - .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23 UNDERWRITERS' LAB. INC. LISTED RATING
20A - 125, 250 OR 480 VAC
10A - 125 VAC "L"
1HP - 125 VAC, 2HP - 250 VAC
1/2A - 125 VDC, 1/4A - 250 VDC

L288
L299
L308

20(3)A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .093 LB

DRAWN R E R 20 SEP 60
FORMTEK
FO-50378