

- PRODUCT FAMILIES**
- Pin Headers and Sockets
 - Clips and Insulators
 - Banana Plugs and Jacks
 - Grabbers, Probes and Spade Terminals
 - Test Leads and Patch Cords
 - Coaxial Cable Assemblies
 - Coaxial Test Leads
 - Coaxial Break-Outs**
 - DMM Kits

Coaxial Break-Outs

Mini-Micro-Plunger to BNC Male



Model# BU-1450-C-**-0

- Material: BNC Male Connector: MIL-C-39012, gold-plated center contact and silver-plated body; Coaxial Cable: shielded RG58C/U, MIL-C-17F, 50 ohm; Plunger: nylon housing, stainless steel spring and beryllium copper contact
- **Length: -12" (3m), 24" (6m), 36" (9m), 48" (1.2m), 60" (1.5m)
- Rating: Hands free testing at 300 VRMS on center conductor

Insulated Alligator Clips to BNC Male With RG58



Model# BU-5030-C-**-0

- Material: Alligator Clip: nickel-plated steel with PVC insulator; BNC Male Connector: MIL-C-39012, gold-plated center contact and silver-plated body (RG174/U BNC is a commercial connector with nickel-plated body); Coaxial Cable: shielded RG58C/U, MIL-C-17F, 50 ohm or shielded RG174/U, MIL-C-17D, 50 ohm
- **Length: -12" (3m), 24" (6m), 36" (9m), 48" (1.2m), 60" (1.5m)
- Rating: Hands free testing at 300 VRMS on center conductor

BNC Male Breakout to Tinned End Wires



Model# BU-5100-A-4-0

- Material: BNC Male Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS on center conductor

BNC Male Breakout to Mini-Micro-Grabbers



Model# BU-5114-A-4-0

- Material: BNC Male Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Mini-Micro-Grabbers (No.208) conductor and abrasion resistant, nylon housing; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 150 VRMS, 5 Amp

Insulated BNC Male to BNC Female



Model# BU-5659-B-**-0

- Material: BNC Male/Female Connector: fully insulated nylon housing; nickel-plated brass body, gold/nickel plated brass center contact; polyethylene dielectric; Coaxial Cable: RG58, 50 ohm
- **Length: -12" (3m), 24" (6m), 36" (9m), 48" (1.2m), 60" (1.5m)
- Rating: Hands free testing at 500 VRMS on center conductor

BNC Male Breakout to Stackable Single Banana Plugs



Model# BU-5120-A-4-0

- Material: BNC Male Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Banana Plug: premium nine-leaf, nickel-plated beryllium copper springs and copper alloy 360 bodies for minimum stacked in multiples, ABS housing; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 5 Amp

BNC Male Breakout to Insulated Mini-Alligator Clips



Model# BU-5131-A-4-0

- Material: BNC Male Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Clip: Mueller No. 30BL with No. 31 insulators; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 10 Amp

BNC Male Breakout to Stackable 0.080" (2.0mm) Pin Plugs



Model# BU-5144-A-4-0

- Material: BNC Male Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Pin Tip: nickel-plated brass 0.080" (2.0mm) dia; 0.500" (12.7mm) long; Tip Jack: Accepts 0.080" (2.0mm) dia. pin, nickel-plated, alloy 360 copper body; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 5 Amps

BNC Female Breakout Style to Tinned End Wires



Model# BU-5200-A-4-0

- Material: BNC Female Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 5 Amps


BNC Female Breakout to Mini-Micro-Grabbers



Model# BU-5214-A-4-0

- Material: BNC Female Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Mini-Micro-Grabbers (No.208) conductor and abrasion resistant, nylon housing; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 5 Amps


BNC Female Breakout to Stackable Single Banana Plugs

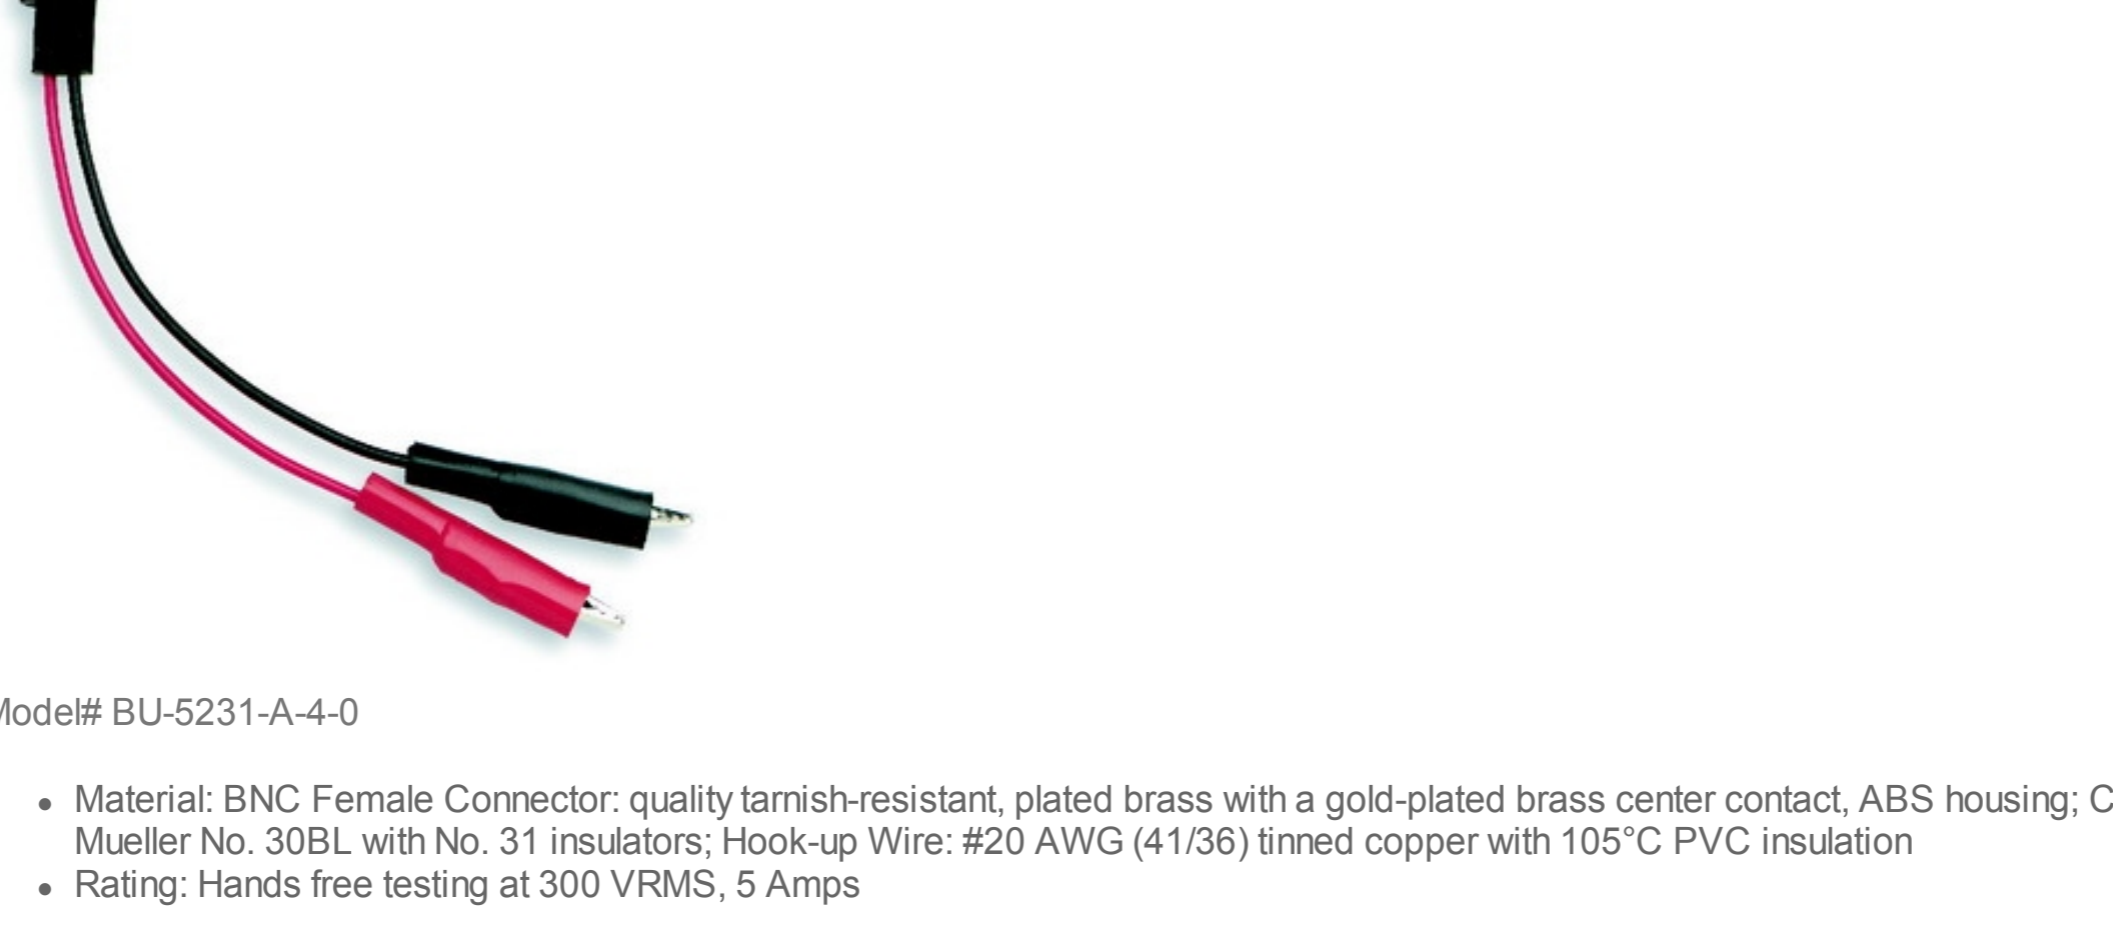

Model# BU-5220-A-4-0

- Material: BNC Female Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Banana Plug: premium nine-leaf, nickel-plated beryllium copper springs and copper alloy 360 bodies for minimum stacked in multiples, ABS housing; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 10 Amps

BNC Female Breakout to Insulated Mini-Alligator Clips

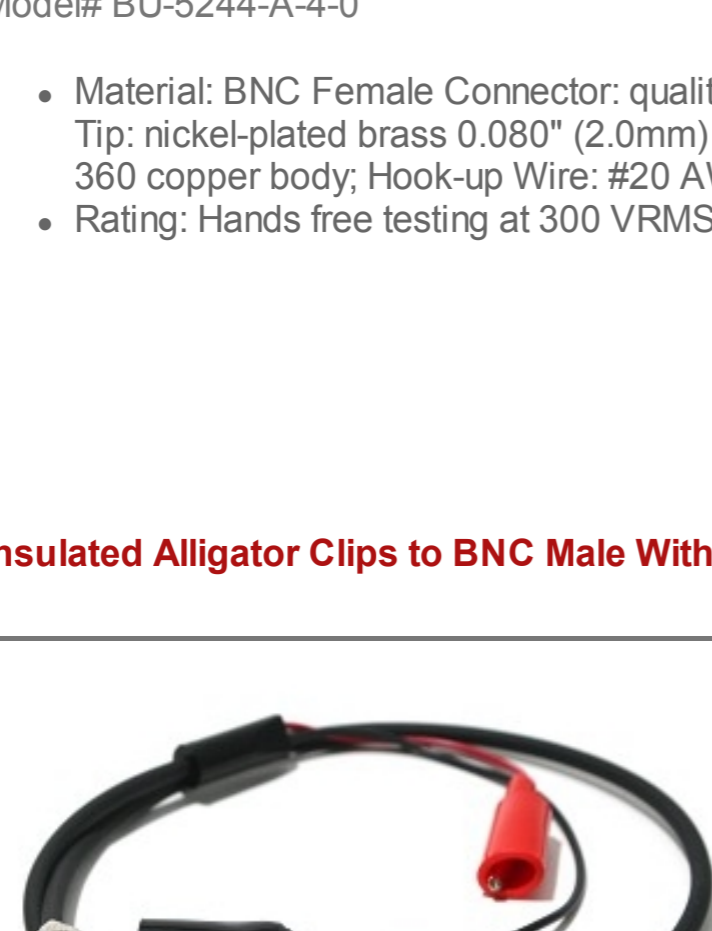

Model# BU-5231-A-4-0

- Material: BNC Female Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Clip: Mueller No. 30BL with No. 31 insulators; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 5 Amps


BNC Female Breakout to Stackable 0.080" (2.0mm) Pin Plugs



Model# BU-5244-A-4-0

- Material: BNC Female Connector: quality tarnish-resistant, plated brass with a gold-plated brass center contact, ABS housing; Pin Tip: nickel-plated brass 0.080" (2.0mm) dia; 0.500" (12.7mm) long; Tip Jack: accepts 0.080" (2.0mm) dia. pin, nickel-plated, alloy 360 copper body; Hook-up Wire: #20 AWG (41/36) tinned copper with 105°C PVC insulation
- Rating: Hands free testing at 300 VRMS, 5 Amps

Insulated Alligator Clips to BNC Male With RG174



Model# BU-5330-F-**-0

- Material: Alligator Clip: nickel-plated steel with PVC insulator; BNC Male Connector: MIL-C-39012, gold-plated center contact and silver-plated body (RG174/U BNC is a commercial connector with nickel-plated body); Coaxial Cable: shielded RG58C/U, MIL-C-17F, 50 ohm or shielded RG174/U, MIL-C-17D, 50 ohm
- **Length: -12" (3m), 24" (6m), 36" (9m), 48" (1.2m), 60" (1.5m)
- Rating: Hands free testing at 300 VRMS on center conductor

TOOL SEARCH TOOLS

MUELLER OR DISTRIBUTOR STOCK SEARCH

PART #

SEARCH

CROSS COMPETITOR PART #

Choose a Brand

PART #

SEARCH

TOOL: **ResistMate® DMM ACCESSORY SELECTOR**

Select Meter Make

Select a Make First

TOOL: **MUELLER PCB HEADER OR SOCKET**

[VIEW TOOLS BY STOCK](#)