

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929

SWITCH - BASIC


M BZ-2RQ115-A2
PAGE 1 OF 1
DRAWING NUMBER
ISSUE 8

(M) BZ-2RQ115-A2
ISSUE 2

REVISIONS

A	CO 14866	O M W	17 OCT 60
B	CO34304	B E N	21 JAN 75
C	CO-73287-J	J A L	22 NOV 93
D	CO-77589	K D R	29 MAR 94
E	CO-82133	CSL	30 JUL 96
F	CO93346	D L T	12 AUG 98

FORMTEK
O-50378
DRAWN
O M W
17 OCT 60
CHECK
T S M
8 AUG 96
CHECK
60

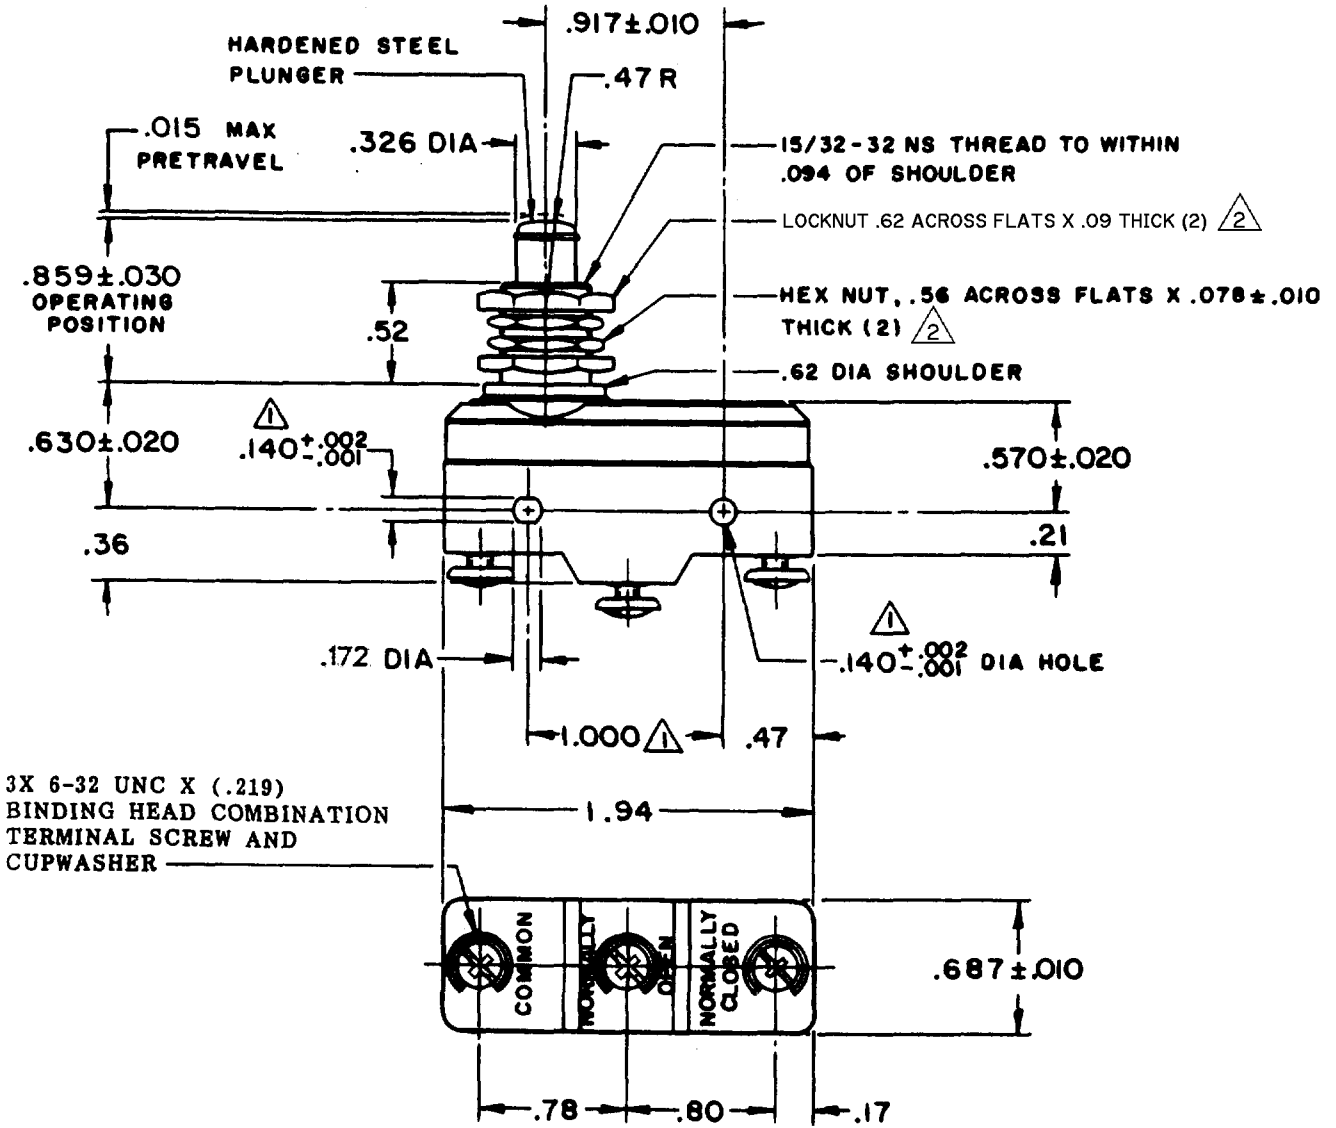

- NOTES
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
 - ② HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	UNDERWRITERS' LAB. INC. LISTED RATING -L9- 10 A - 125, 250, OR 480 VAC 1/2 A - 125 VDC; 1/4 A - 250 VDC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .0004 - .002	-L 288-	TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL ----- .219 MIN		WEIGHT .094 LB