

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RQW55-W103

X98235-BZ

CATALOG LISTING
BZ-2RQW55-W103
PAGE 1 OF 1

ISSUE
M
4

REPLACES
PR-21646



REVISIONS
A CO-82977
D.L.T.
14 MAY 96
B CO-83108
G.J.W.
21 JUN 96
C CO93552
T.S.M.
20 JAN 99

CHECK
W J C 2 MAY 95

CHECK
W J C 27 APR 95

FORMTEK
DRAWN


OMNI DIRECTIONAL ACTUATION
(SEE CHARACTERISTICS)

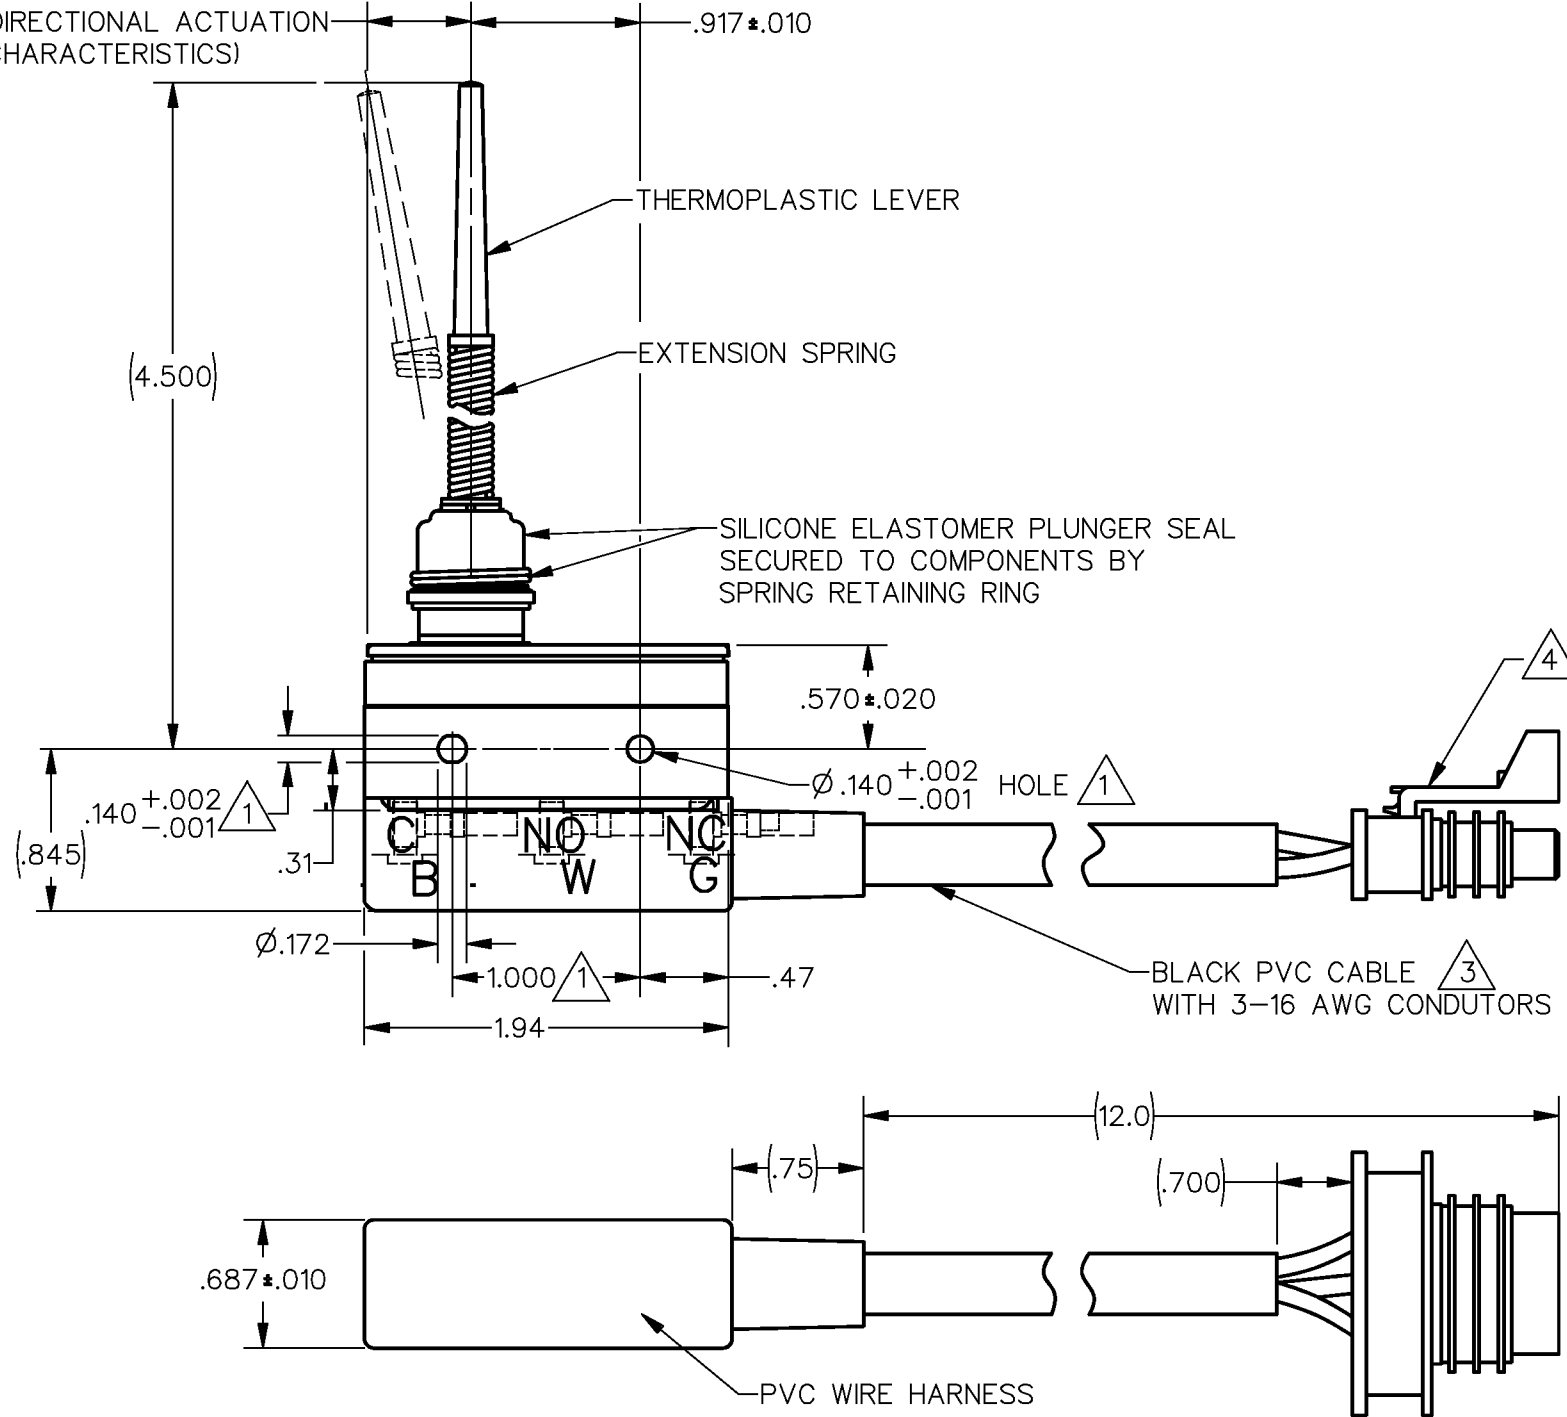

- NOTES
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
 - ② - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
 - ③ BLACK LEAD IS ATTACHED TO THE COMMON TERMINAL
WHITE LEAD IS ATTACHED TO THE N.O. TERMINAL
GREEN LEAD IS ATTACHED TO THE N.C. TERMINAL
 - ④ 150 SERIES METRI-PACK CONNECTOR (PACKARD)
3 WAY CONNECTOR 12110293
3X FEMALE TERMINAL 12048074
LOCK 12052845
SEAL 12048086 OR 12052924

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



CHARACTERISTICS

PRETRAVEL (OMNI DIRECTIONAL)500 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	

ANSI Y14.5M-1982 APPLIES