MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
BZE6–2RN2–F3

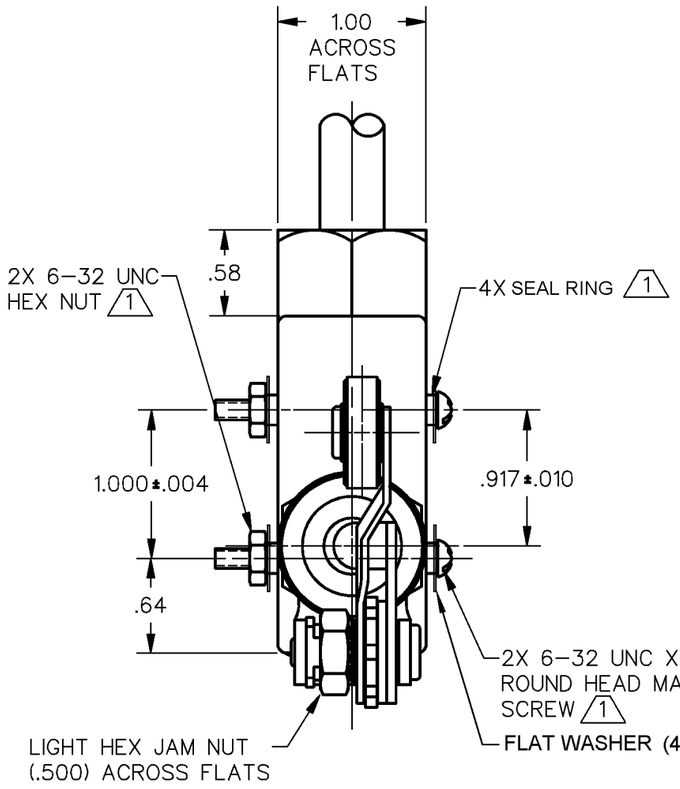

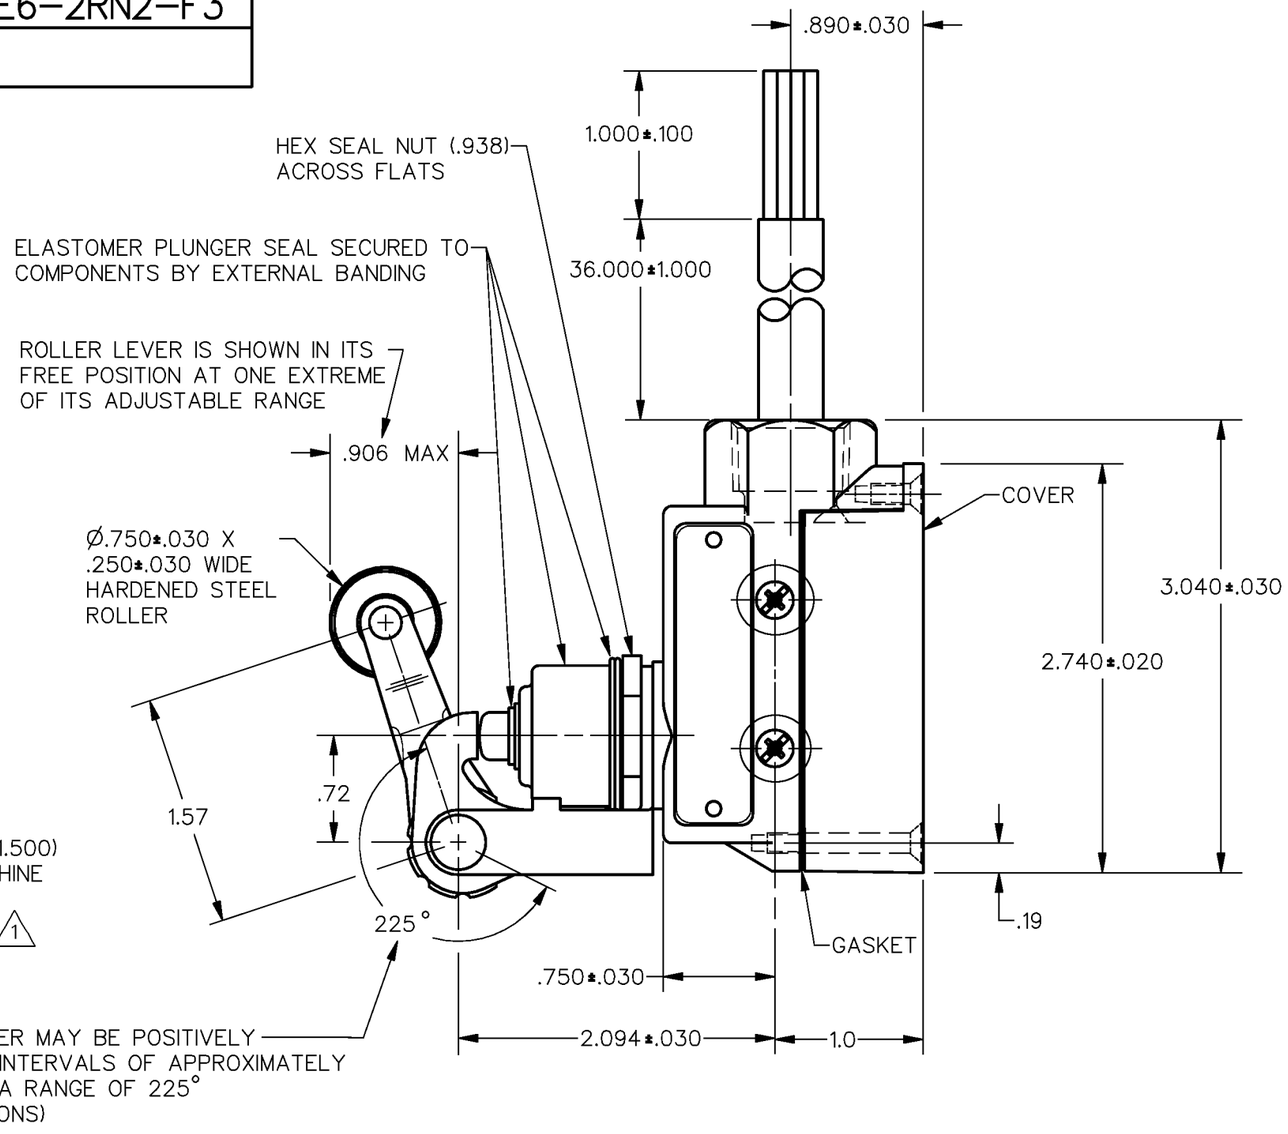

NOTE
1 FURNISHED UNASSEMBLED
2 – ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
3 – SWITCH CAVITY FULLY POTTED
4 – SEAL RATING: NEMA 1, 3, 4, 12, 13 IP 56

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ANSI Y14.5M–1982 APPLIES

CHARACTERISTICS	
OPERATING FORCE	14–26 OZ
RELEASE FORCE	10 OZ MIN
PRETRAVEL	.188 MAX
DIFFERENTIAL TRAVEL	.006 MAX
OVERTRAVEL	.219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L270
10A 125, 250 OR 480 VAC
2A 600 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC. 1/4A 250 VDC
1.5A, 240 Vac



CIRCUIT DIAGRAM

CATALOG LISTING BZE6–2RN2–F3
ISSUE 5 PAGE 1 OF 1
RELEASE NO. PR–19438 REPLACES

REVISIONS

A	CO–73655	TSM	22 APR 93
B	CO 75965	TSM	20 AUG 93
C	CO81513B	JAK	25 FEB 97
D	0017273	KSR	21 NOV05

RASTER | DRAWN SAV 23 OCT 91 | CHECK RJ 21NOV05 | CHECK