


FOR FACTORY USE ONLY

CATALOG LISTING		PAGE 1 OF 1	
BZ-R-P4		RELEASE NO. PR-3447	
9		REPLACES	
1 ISSUE		CHECK	

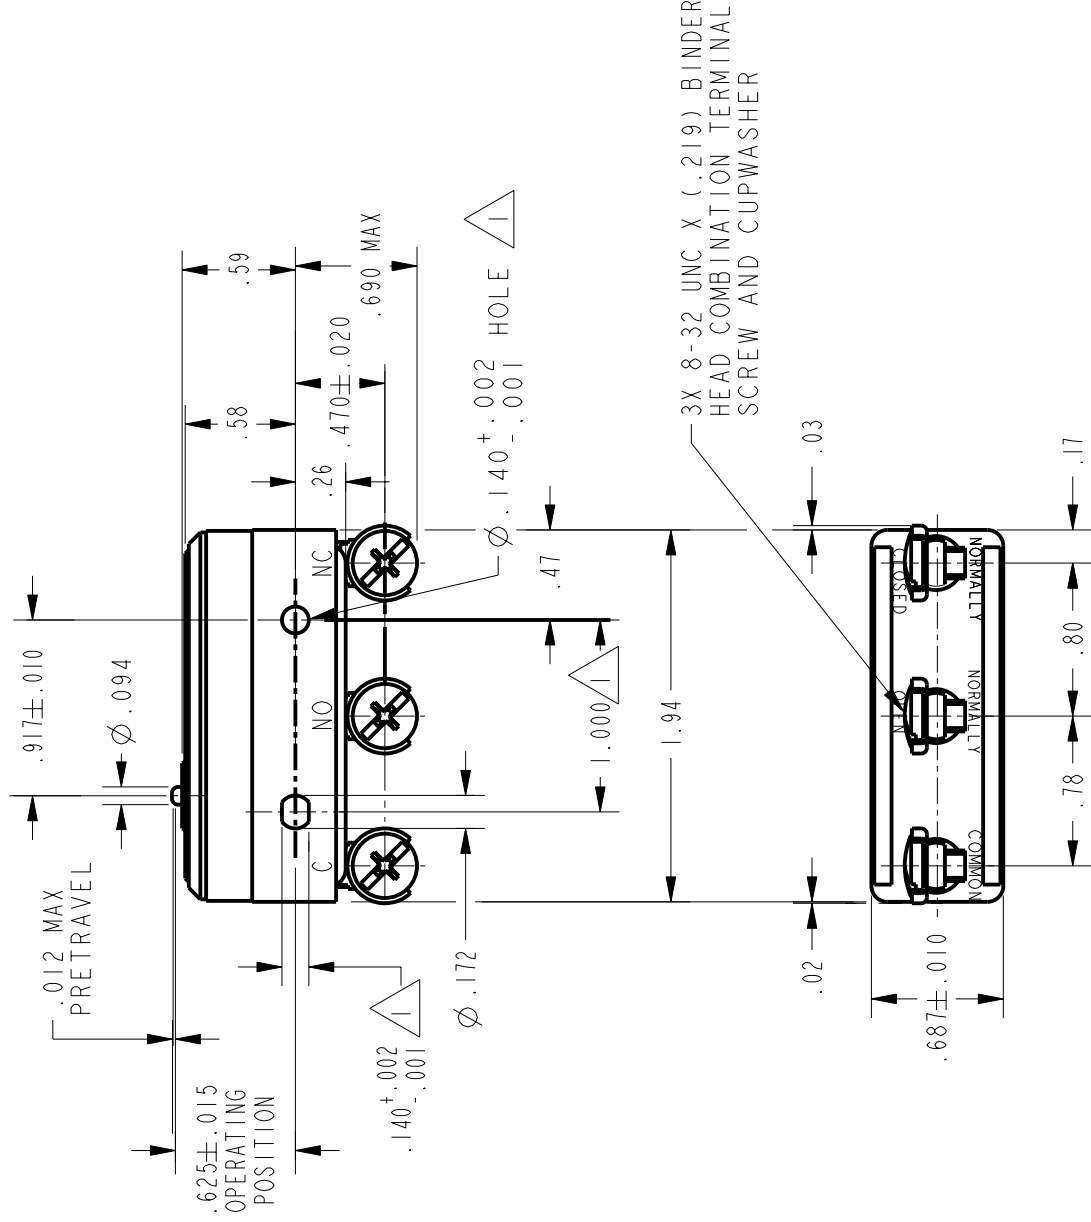

NOTES
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø .139 MAX ON 1.000 ± .002 CENTERS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA		SCALE		DO NOT SCALE PRINT
	CONTACT ARRANGEMENT		FULL	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OPERATING FORCE	S P D T			ONE PLACE (.0)	± .030
RELEASE FORCE	L103			TWO PLACE (.00)	± .015
DIFFERENTIAL TRAVEL	15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC			THREE PLACE (.000)	± .005
OVERTRAVEL	.005 MIN			ANGLES	±
				WEIGHT	.060 LB



PTC/CAD 2D
DRAWN

REVISIONS

A	202868	
G J W	APR 01	

	CHECK	17 APR 01
	CHECK	17 APR 01
	CHECK	SAV