

MICRO SWITCH

FREEMONT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-RQ1T04

M8805/1-018

ISSUE 9

REPLACES

RELEASE NO.

CHECK

68

CHECK

68

CHECK

68

CHECK

68

M BZ-RQ1T04

DRAWING NUMBER


FORM

ISSUE 12/13

REVISIONS

| | | | |
|---|------------|-------|-----------|
| A | CO22575 | R E R | 9 JAN 68 |
| B | CO22575 | GFS | 8 AUG 68 |
| C | CO-69351-D | JWB | 18 JUL 91 |
| D | CO-82133 | CSL | 29 JUL 96 |

FORMTEK
FO-80378-1A
DRAWN

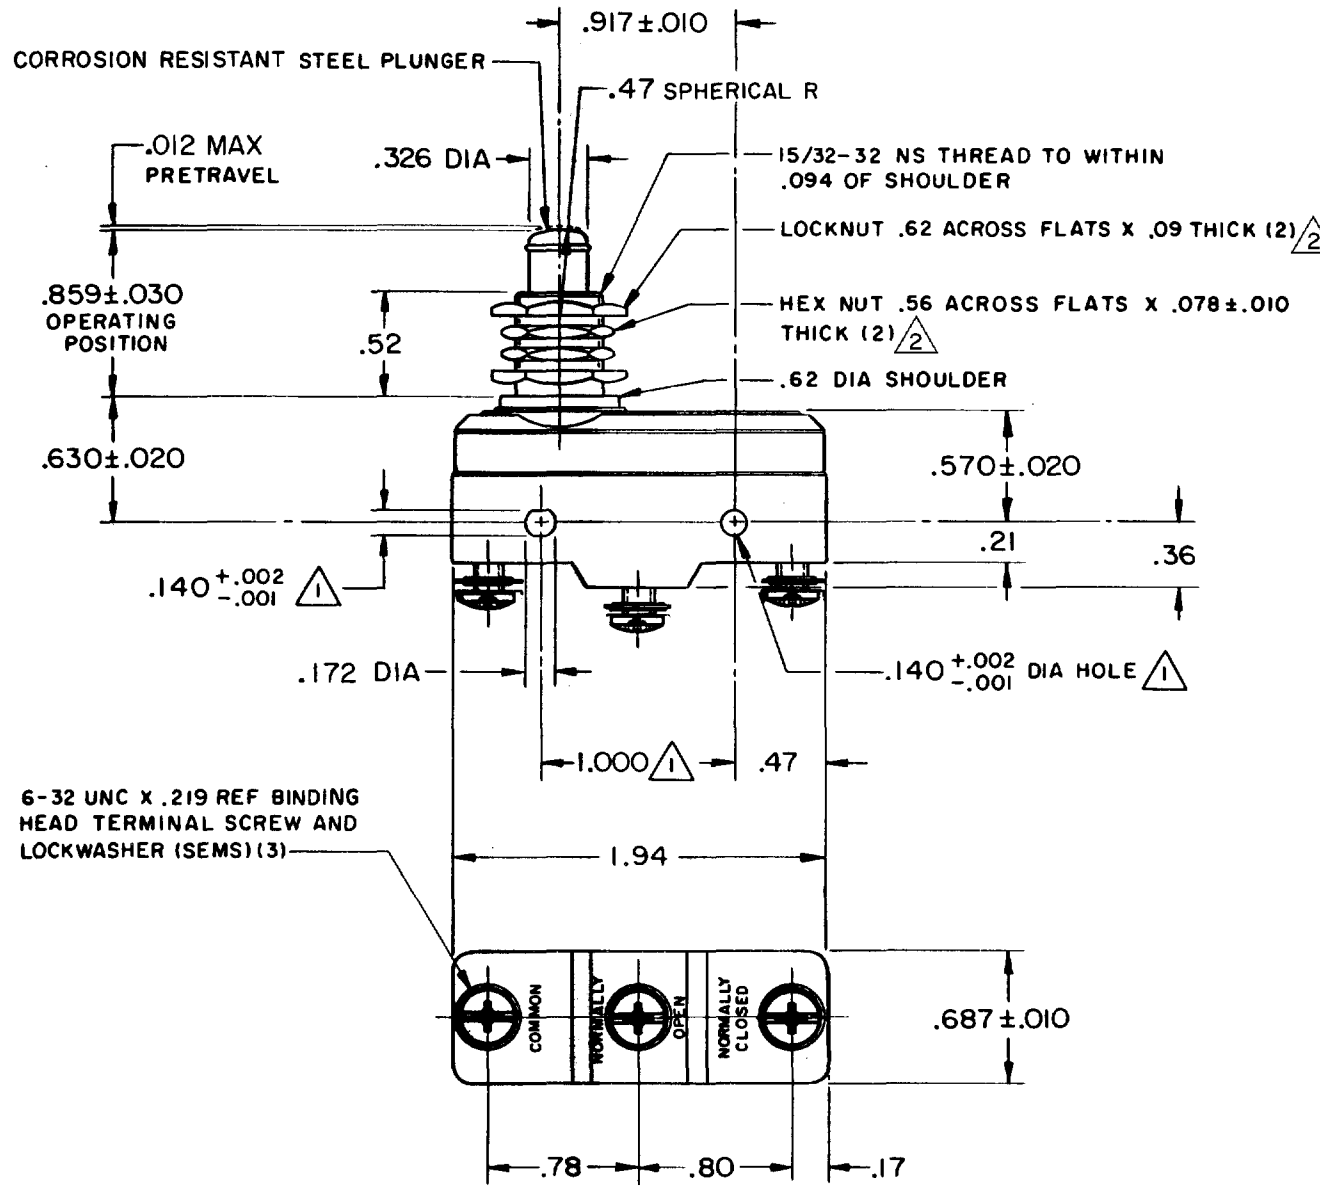

- NOTES
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
 - ② HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

| CHARACTERISTICS | ELECTRICAL DATA | SCALE FULL |
|---------------------------------------|--------------------------------|---------------------------|
| OPERATING FORCE - - - - - 7-10 OZ | CONTACT ARRANGEMENT S P D T | DO NOT SCALE PRINT |
| RELEASE FORCE - - - - - 6 OZ MIN | | UNLESS OTHERWISE NOTED |
| DIFFERENTIAL TRAVEL - - - - .0015 MAX | | DIMENSIONS ARE IN INCHES |
| OVERTRAVEL - - - - - .219 MIN | | TOLERANCES ARE: |
| | | ONE PLACE (.0) ± .030 |
| | | TWO PLACE (.00) ± .015 |
| | | THREE PLACE (.000) ± .005 |
| | | ANGLES ± |
| | | WEIGHT .095 LB |