


CATALOG LISTING  
**BZ-RW 9221**  
PAGE 1 OF 1  
REPLACES  
PR-1365  
CHECK  
16 SEP 99  
JAF  
CHECK  
16 SEP 99  
DCS  
16 SEP 99  
DRAWN  
RASTER

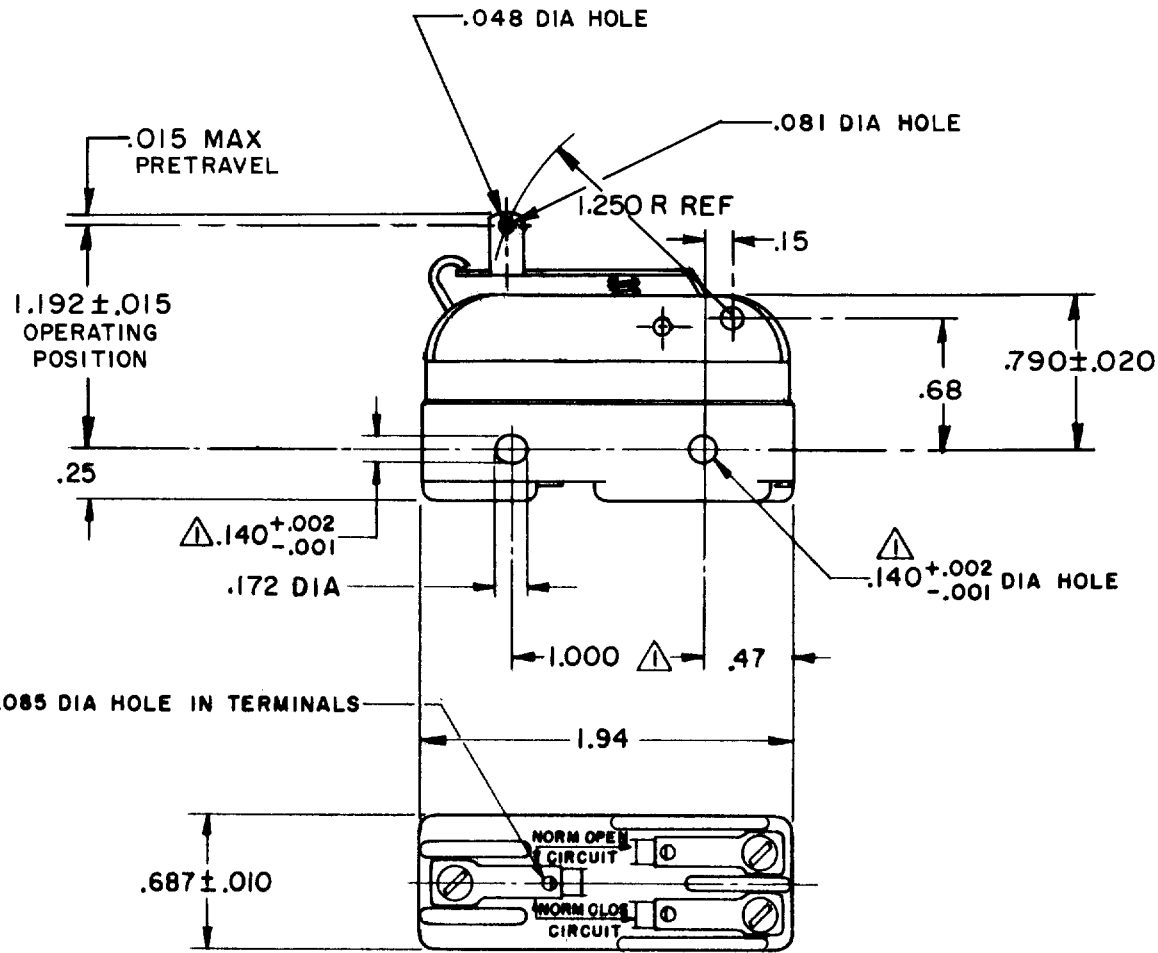

**NOTE-**  
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS  
 2 - PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS
OPERATING FORCE - - - - - 12 OZ MAX
RELEASE FORCE - - - - - 4 OZ MIN
DIFFERENTIAL TRAVEL - - -.0005 - .0010
OVERTRAVEL - - - - - .100 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT <b>S P D T</b>

L95  
 10A 125, 250 OR 480 VAC  
 1/8HP 125 VAC, 1/4HP 250 VAC

L288



SCALE	FULL	DO NOT SCALE PRINT
<b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b>		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT		

