

1500 Standard & 1300 High Inrush Switches 150A to EN61058-1 and 16A 250Vac



- ▶ Standard rocker switch
- ▶ Non-illuminated
- ▶ 1300 high in-rush current
- ▶ Choice of switching circuits including 3 position
- ▶ Choice of bezel styles
- ▶ Choice of panel cut outs
- ▶ Matching indicator
- ▶ Single pole
- ▶ Splashproof option
- ▶ Bezel size 'A' style 30.2 x 14.0



1500 Series 16(4)A 250Vac T125

UL CSA 16A Non Ind 250Vac, (2 posn) 250Vac 1hp, 125Vac
 1/2hp, (3 posn) 250Vac 1/2hp, 125Vac 1/4hp
 UL 10A 14Vdc 'T' (1500 and 1510 only)
 UL 85°C, file E45221, CSA file LR10990

30A 12Vdc

1300 series 16(6)A 250Vac T125 5E4 (50,000 Ops.)
 150A Inrush to EN61058-1

UL CSA 20A 250Vac 1hp, 125Vac 1/2hp
 UL 85°C, file E45221, CSA file LR10990

20A 28Vdc

RoHS compliant

3mm contact gap except if marked μ .

Technical data on pages 4 & 5 (switches), 66 (indicators).

NON-LIT		LIT		
B BLACK	B BLACK	A AMBER	X ROCKER COLOR R,G,W,B	
R RED	R RED	C CLEAR	2 125V NEON	
W WHITE	W WHITE	G GREEN	3 250V NEON	
		R RED	7 12V INCANDESCENT	


C 1300 A L B B - 602AW

ORDER FORMAT

TERMINAL CODE	FUNCTION CODE	ROCKER CODE	BODY CODE	BODY COLOR	ROCKER COLOR	LAMP VOLTAGE OR "ON LIGHT"	LEGEND & OPTIONS
---------------	---------------	-------------	-----------	------------	--------------	----------------------------	------------------

TERMINAL	FUNCTION	ROCKER																																				
<p>C</p> <p>6.3 x 0.8</p>	<p>Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1</p> <table border="1"> <tr> <td>Standard 1500</td> <td>High Inrush 1300 <small>Approvals apply to C & T terminals only</small></td> <td>ON - OFF</td> <td></td> </tr> <tr> <td>1501 <small>HP rating N/A</small></td> <td></td> <td>ON - OFF (momentary ON)</td> <td></td> </tr> <tr> <td>1502 <small>HP rating N/A</small></td> <td></td> <td>ON - OFF (momentary OFF)</td> <td></td> </tr> <tr> <td>1510 μ <small>HP rating N/A</small></td> <td></td> <td>ON - ON</td> <td></td> </tr> <tr> <td>1511 μ <small>HP rating N/A</small></td> <td></td> <td>ON - ON (momentary 1 side)</td> <td></td> </tr> <tr> <td>1520 μ <small>125V & 250V 1/2 HP H terminal rated T100 only</small></td> <td></td> <td>ON - OFF - ON</td> <td></td> </tr> <tr> <td>1521 μ <small>HP rating N/A H terminal rated T100 only</small></td> <td></td> <td>ON - OFF - ON (momentary 1 side)</td> <td></td> </tr> <tr> <td>1522 μ <small>HP rating N/A H terminal rated T100 only</small></td> <td></td> <td>ON - OFF - ON (momentary 2 sides)</td> <td></td> </tr> <tr> <td>0430 <small>X terminal N/A</small></td> <td></td> <td>Indicator Technical data on page 66</td> <td></td> </tr> </table>	Standard 1500	High Inrush 1300 <small>Approvals apply to C & T terminals only</small>	ON - OFF		1501 <small>HP rating N/A</small>		ON - OFF (momentary ON)		1502 <small>HP rating N/A</small>		ON - OFF (momentary OFF)		1510 μ <small>HP rating N/A</small>		ON - ON		1511 μ <small>HP rating N/A</small>		ON - ON (momentary 1 side)		1520 μ <small>125V & 250V 1/2 HP H terminal rated T100 only</small>		ON - OFF - ON		1521 μ <small>HP rating N/A H terminal rated T100 only</small>		ON - OFF - ON (momentary 1 side)		1522 μ <small>HP rating N/A H terminal rated T100 only</small>		ON - OFF - ON (momentary 2 sides)		0430 <small>X terminal N/A</small>		Indicator Technical data on page 66		<p>A Softline Matt</p> <p>B Splashproof (with Arcshield) Matt</p> <p>H Slotted (for custom Adaptors) not momentary</p> <p>V Curved Matt or gloss</p> <p>W Splashproof (with Arcshield) Matt</p> <p>X Two color Matt ON - OFF only (not momentary)</p> <p>F Flat lens Gloss (0430 only)</p> <p>A Softline lens Matt (0430 only) as F but with raised profile</p>
Standard 1500		High Inrush 1300 <small>Approvals apply to C & T terminals only</small>	ON - OFF																																			
1501 <small>HP rating N/A</small>			ON - OFF (momentary ON)																																			
1502 <small>HP rating N/A</small>			ON - OFF (momentary OFF)																																			
1510 μ <small>HP rating N/A</small>			ON - ON																																			
1511 μ <small>HP rating N/A</small>			ON - ON (momentary 1 side)																																			
1520 μ <small>125V & 250V 1/2 HP H terminal rated T100 only</small>			ON - OFF - ON																																			
1521 μ <small>HP rating N/A H terminal rated T100 only</small>			ON - OFF - ON (momentary 1 side)																																			
1522 μ <small>HP rating N/A H terminal rated T100 only</small>			ON - OFF - ON (momentary 2 sides)																																			
0430 <small>X terminal N/A</small>			Indicator Technical data on page 66																																			
<p>H</p> <p>4.8 x 0.8*</p>																																						
<p>K</p> <p>2.8 x 0.8*</p>																																						
<p>T</p> <p>7.0</p> <p>Solder</p>																																						
<p>U</p> <p>3.2</p> <p>Right angle "T" solder terminal</p>																																						
<p>X</p> <p>4.0</p> <p>9.1</p> <p>PCB 0.8Sq*</p> <p>*N/A for 1300 series</p>																																						

Enhanced Splashproofing

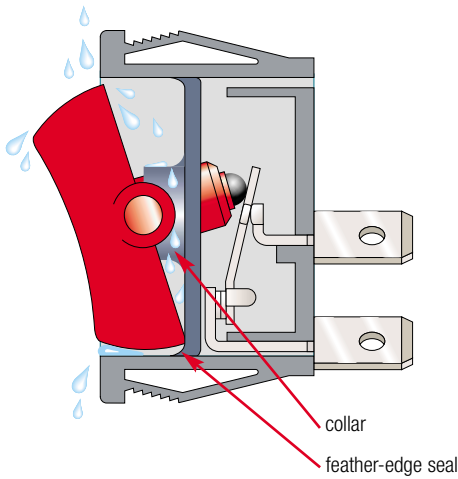

1500 W and B splashproof options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytel collar/seals for enhanced protection.



C1500AL
T1500AL



C1500AR
T1500AR



C1500XL
T1500XL



C1510AL
T1520AL









C1520AL
T1520AL



C0430AL
T0430AL

BODY

Panel cut-out * Bezel
Cut-outs must be punched in the direction of insertion

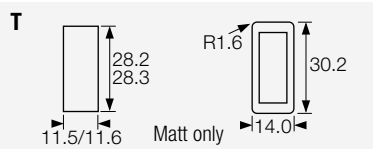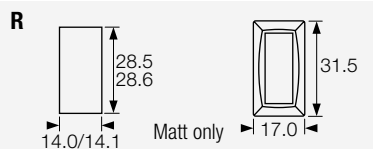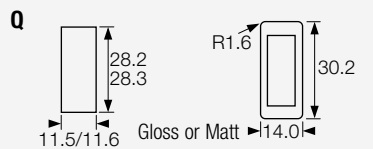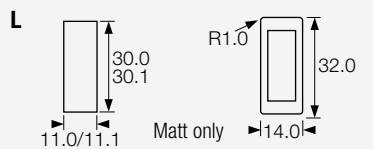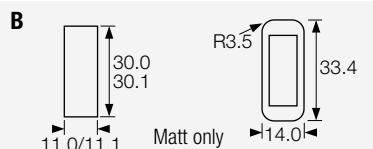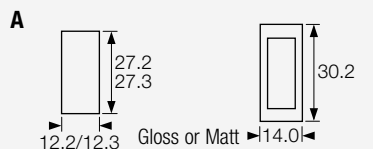

OPTIONS

Finish Matt is standard

Color Call factory for custom colors
A full range is available for large orders

Legend printing Select from the examples or call factory for custom legends

Lamp voltage Call factory for details

Hole blanking plug A0434 Dummy units to fill unused panel holes


Protective cover (designed to IP65)
Snaps on to A, L, Q or T bodies (add G74 as a suffix).
This reduces panel thickness by 1mm.



Panel sealing washer W46 is available for the same body sizes but reduces panel thickness by a further 0.8mm.
Covers are not suitable for momentary types.

For all options call the factory

DIMENSIONS (mm)




Panel thickness

A,Q	0.75 to 3.3mm
L,B,T	0.75 to 2.5mm
R	0.75 to 3.0mm

* For cut-out details on momentary switches call the factory

1300 High inrush, positive break switching

The 1300 series mechanism ensures contact welds formed at switch-on, are positively separated by the plunger tube acting directly on the step in the moving contact.



Examples of our range of legend printing

() is legend color B-Black, W-White, R-Red



602A(W)



730(W)



822(W)