

C310T-SC

3.6 mm x 10 mm Time-delay, axial lead ceramic tube fuses



Product features

- Time-delay
- Designed to IEC60127-3
- Nickel-plated brass single end cap construction
- 3.6 mm x 10 mm compact design utilizes less board space

Applications

Primary circuit protection:

- Power supplies
- LED and general lighting
- Consumer electronics
- Desktop, laptop and notebook
- Test equipment

Agency information

- cURus Recognition file number: E19180, Guide JDYX2/JDYX8
- CCC: 2019010207248211
- KC-Mark: File SU05011-13001, SU05030-13006
- TUV: J50247281, J50235242
- VDE: 40036716

Ordering

- Use ordering number (see page 6 for details)

Packaging suffixes

- -TR1 (1500 parts per 10" diameter reel, tape width 60 mm)
- -TR2 (1500 parts per 10" diameter reel, tape width 52 mm)

Electrical characteristics

| I_n | $1.5I_n$ min minute | $2.1I_n$ max minute | $2.75I_n$ min ms | max s | $4I_n$ min ms | max s | $10I_n$ min ms | max ms |
|----------|---------------------------|---------------------------|------------------------|----------|---------------------|----------|----------------------|-----------|
| 2A- 6.3A | 60 | 2 | 400 | 10 | 150 | 3 | 20 | 150 |


| I_n | $1.5I_n$ min minute | $3I_n$ min ms | max s | $10I_n$ min ms | max ms |
|-------|---------------------------|---------------------|----------|----------------------|-----------|
| 8A | 60 | 400 | 10 | 20 | 150 |

Product specifications


| Part number ¹ | Current rating (A) | Voltage rating (Vac) | Interrupting rating at rated voltage (A) | Typical DC cold resistance (mΩ) | Typical melting I ² t (A ² s) | Maximum voltage drop (mV) | Part marking: engraved on end cap 1st end | Part marking: engraved on end cap 2nd end | cURus | KC | CCC | TUV | VDE |
|--------------------------|--------------------|----------------------|--|---------------------------------|---|---------------------------|---|---|-------|----|-----|-----|-----|
| C310T-SC-2-R | 2 | 250 | 35 | 26.5 | 12 | 100 | T2A L 250V | BUSS C310T-SC | x | x | x | x | x |
| C310T-SC-2.5-R | 2.5 | 250 | 35 | 19.5 | 18.5 | 100 | T2.5A L 250V | BUSS C310T-SC | x | x | x | x | x |
| C310T-SC-3.15-R | 3.15 | 250 | 35 | 14.7 | 38 | 100 | T3.15A L 250V | BUSS C310T-SC | x | x | x | x | x |
| C310T-SC-4-R | 4 | 250 | 40 | 10.6 | 58 | 100 | T4A L 250V | BUSS C310T-SC | x | x | x | x | x |
| C310T-SC-5-R | 5 | 250 | 50 | 7.3 | 57.5 | 100 | T5A L 250V | BUSS C310T-SC | x | x | x | x | x |
| C310T-SC-6.3-R | 6.3 | 250 | 63 | 7.1 | 123 | 100 | T6.3A L 250V | BUSS C310T-SC | x | x | x | x | x |
| C310T-SC-8-R | 8 | 250 | 80 | 3.7 | 200 | 80 | T8A L 250V | BUSS C310T-SC | x | | | | |

1. Part Number Definition: C310T-SCxxx-R
 C310T = Product code
 SC = Single cap
 xxx = Ampere rating
 -R suffix = RoHS compliant


Dimensions—mm

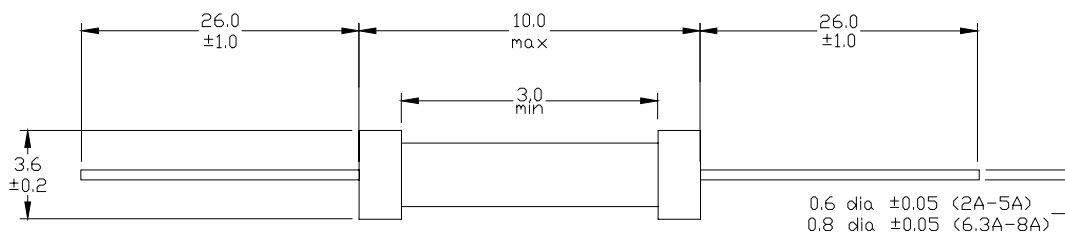


Time vs. current curve

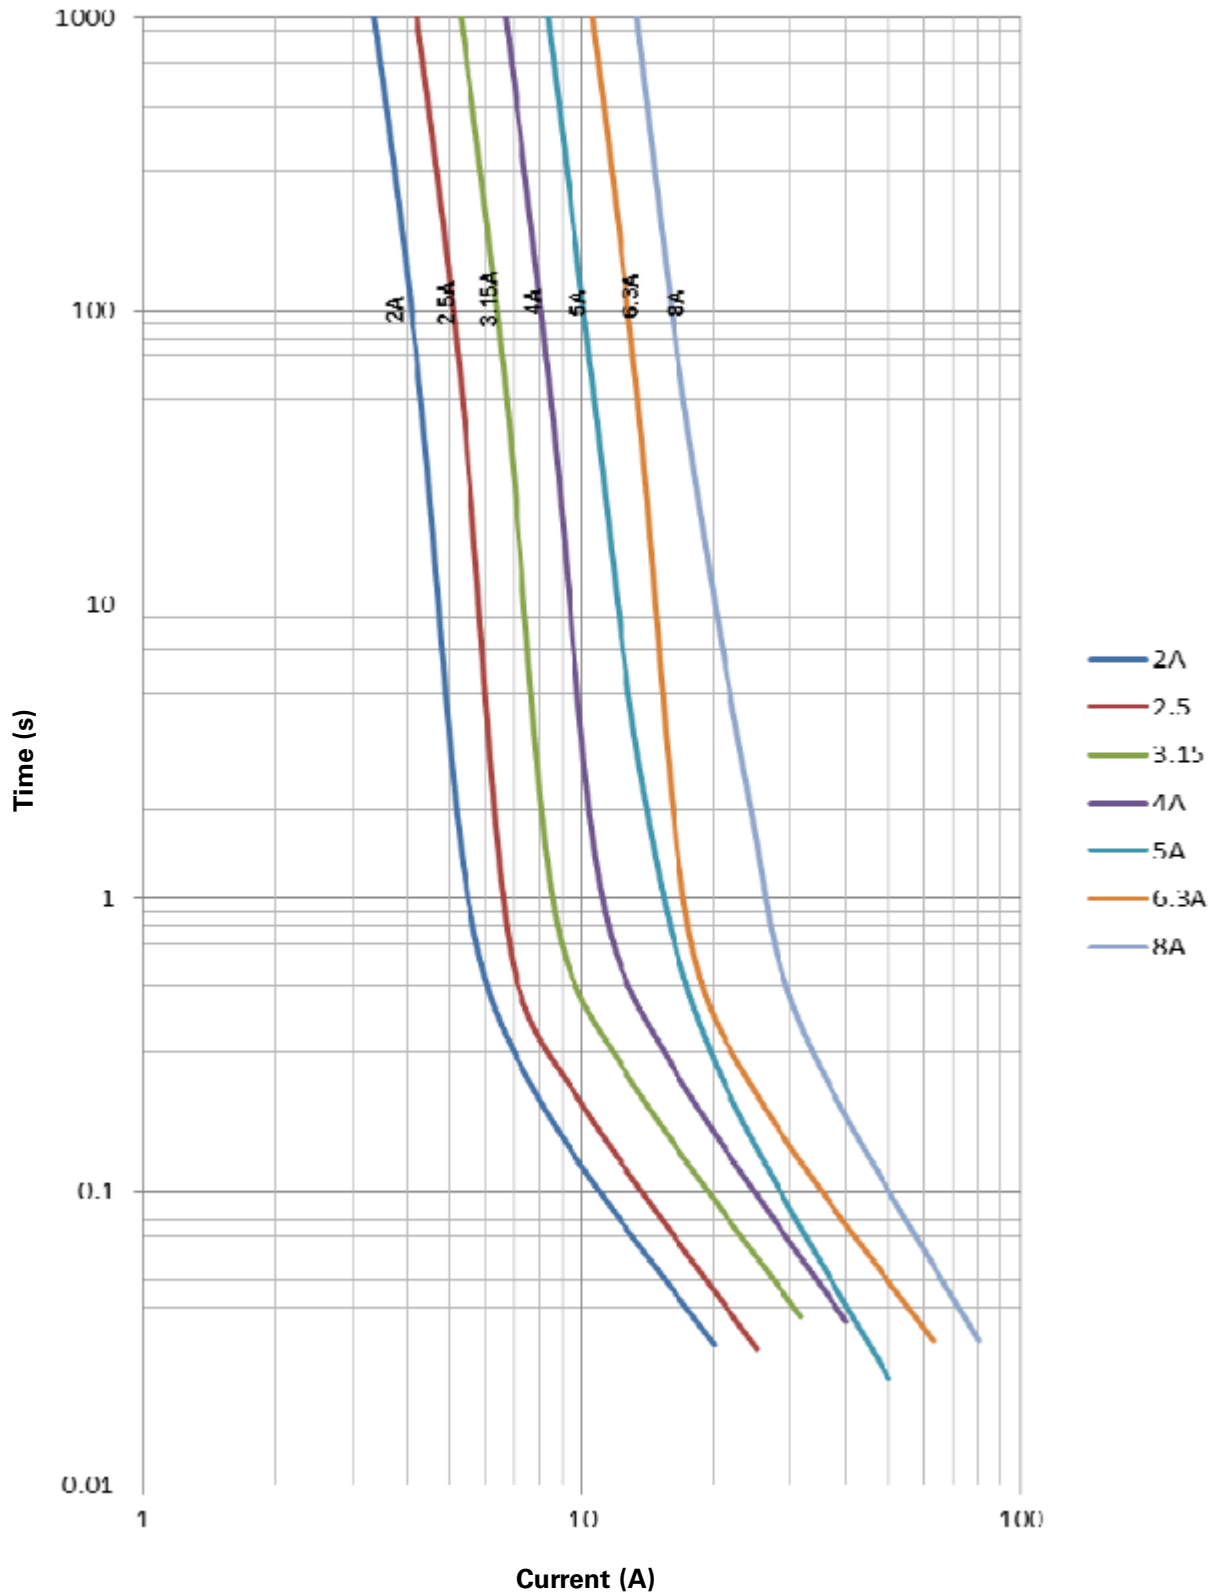


I²t vs. current curve

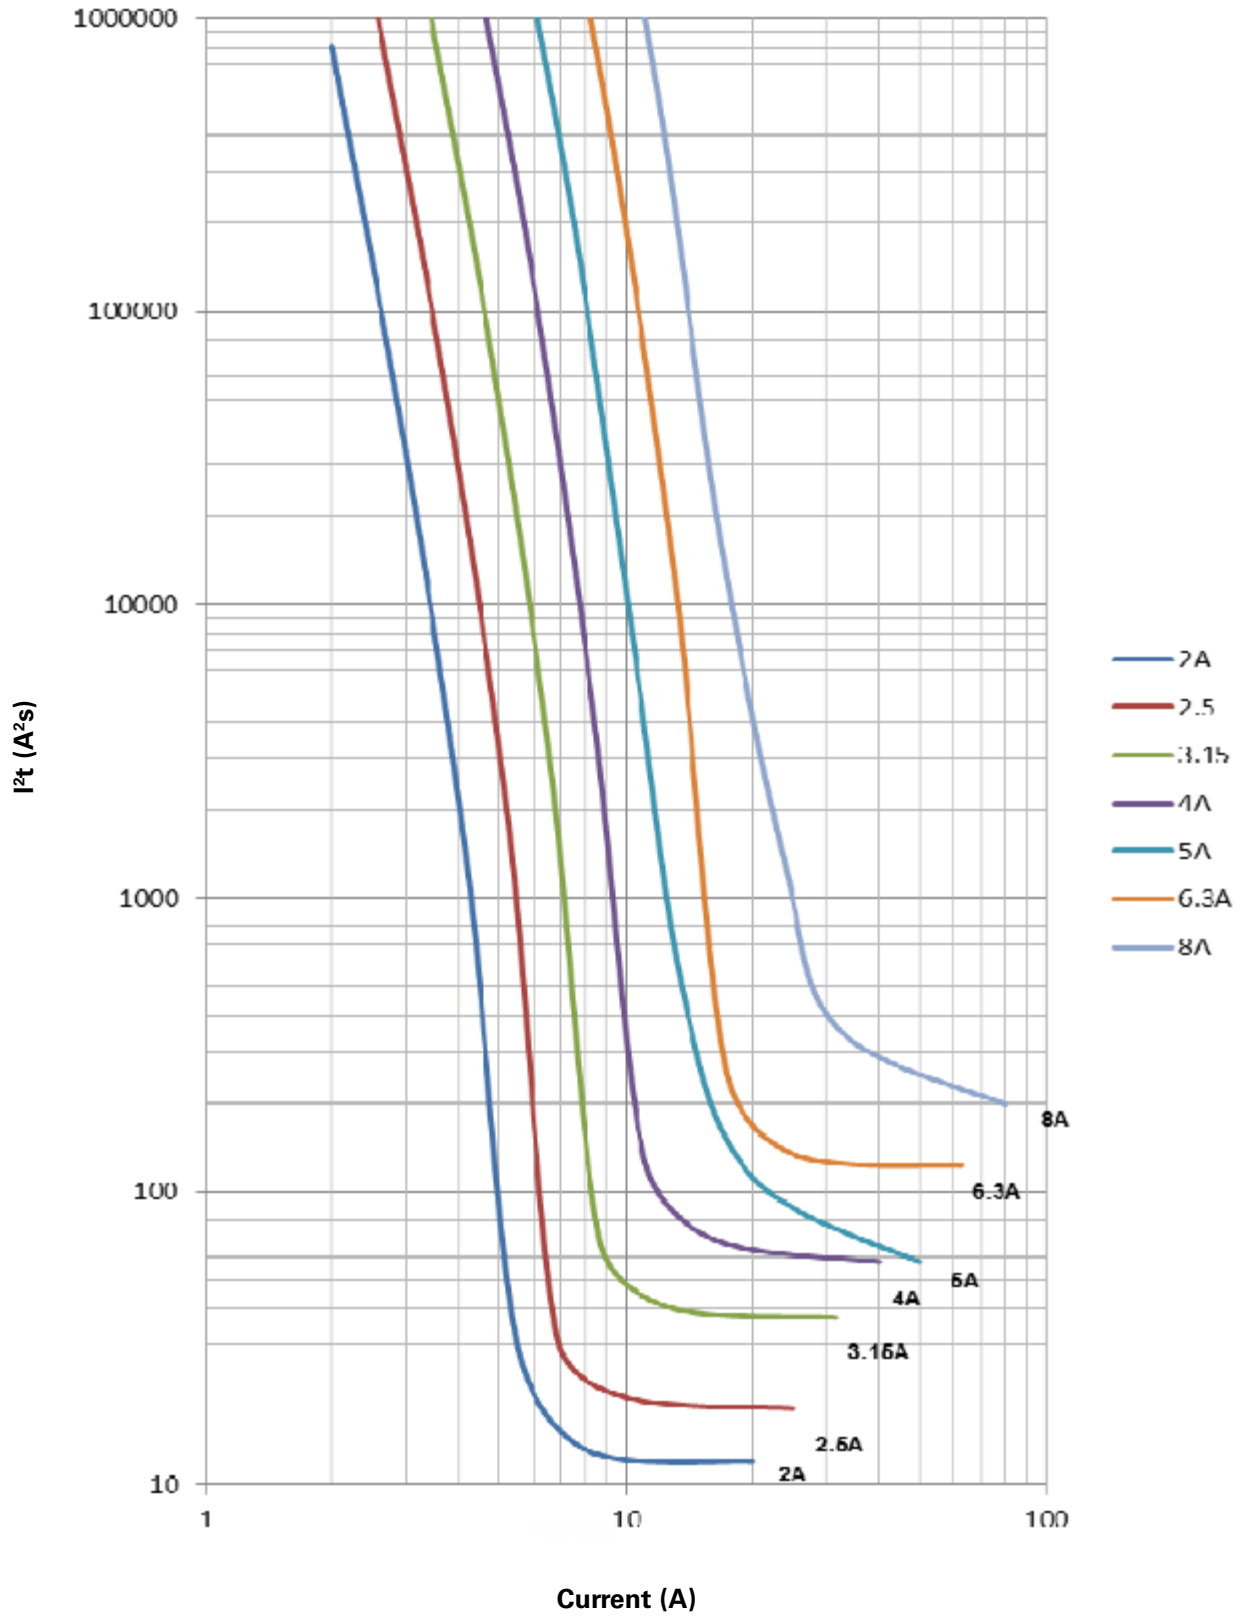

I²t vs. time curve

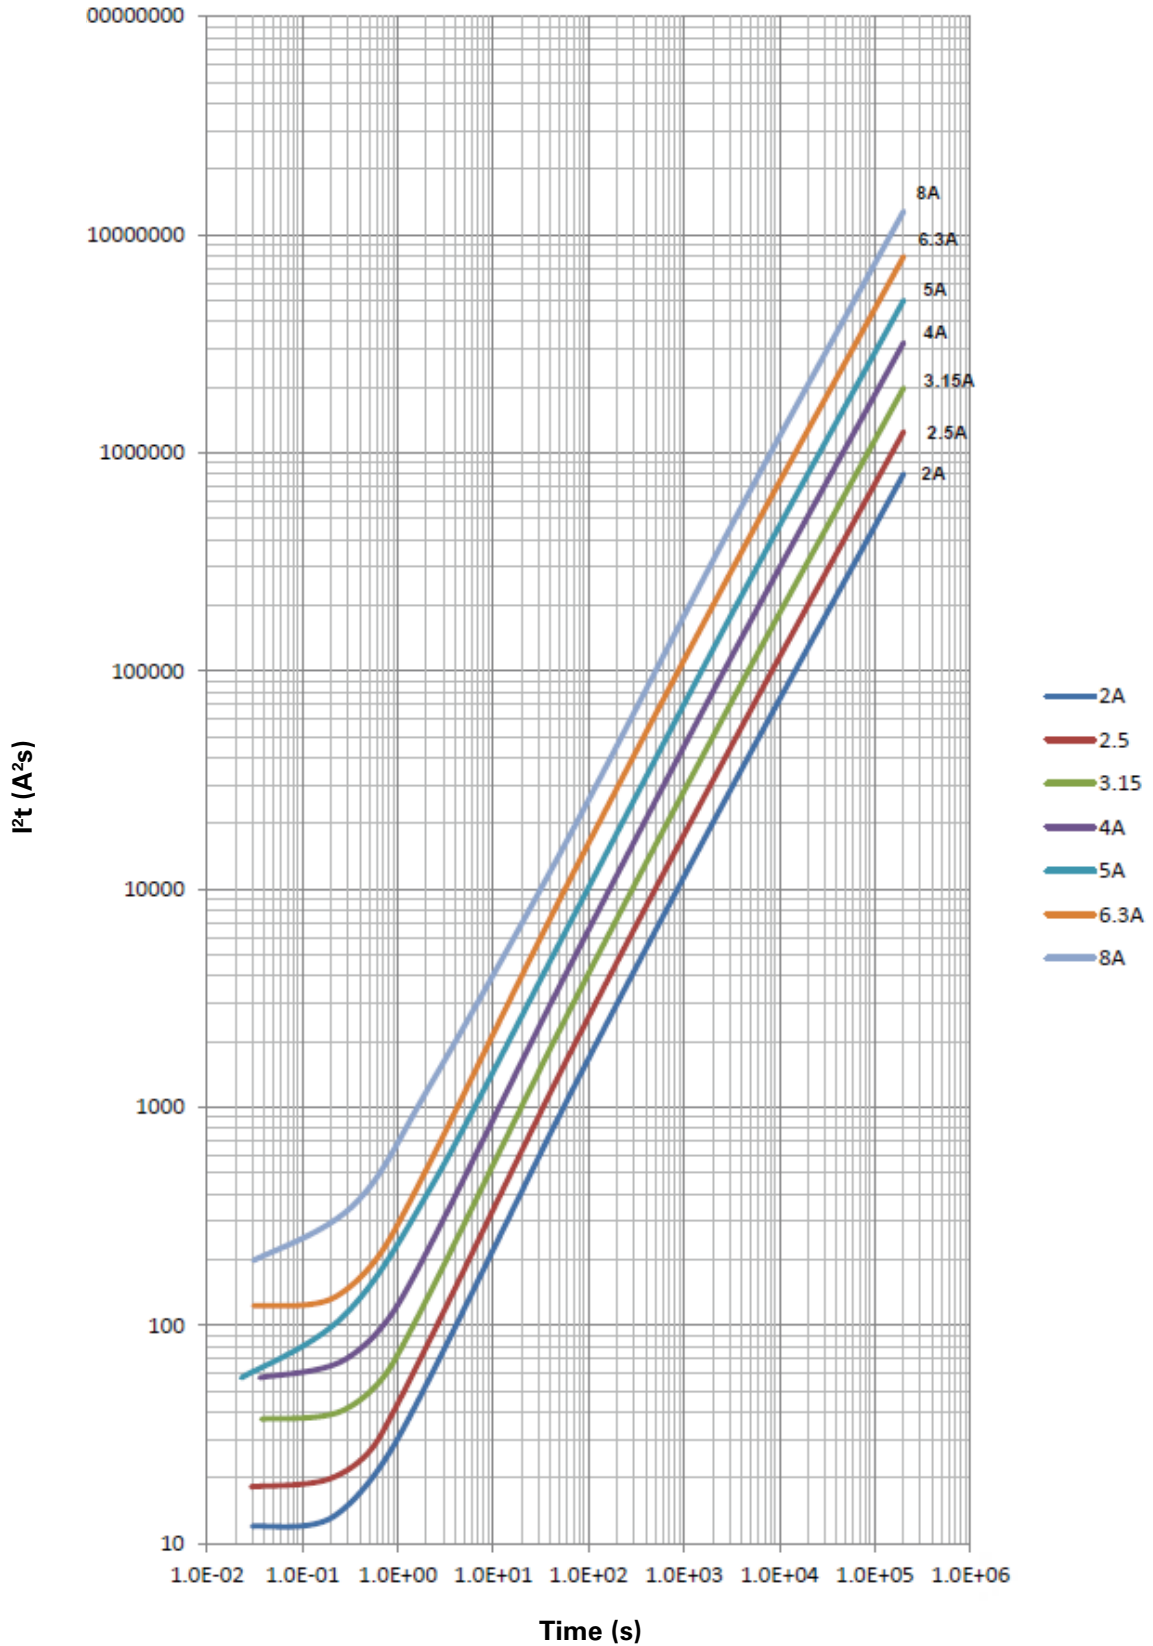

Temperature derating curve

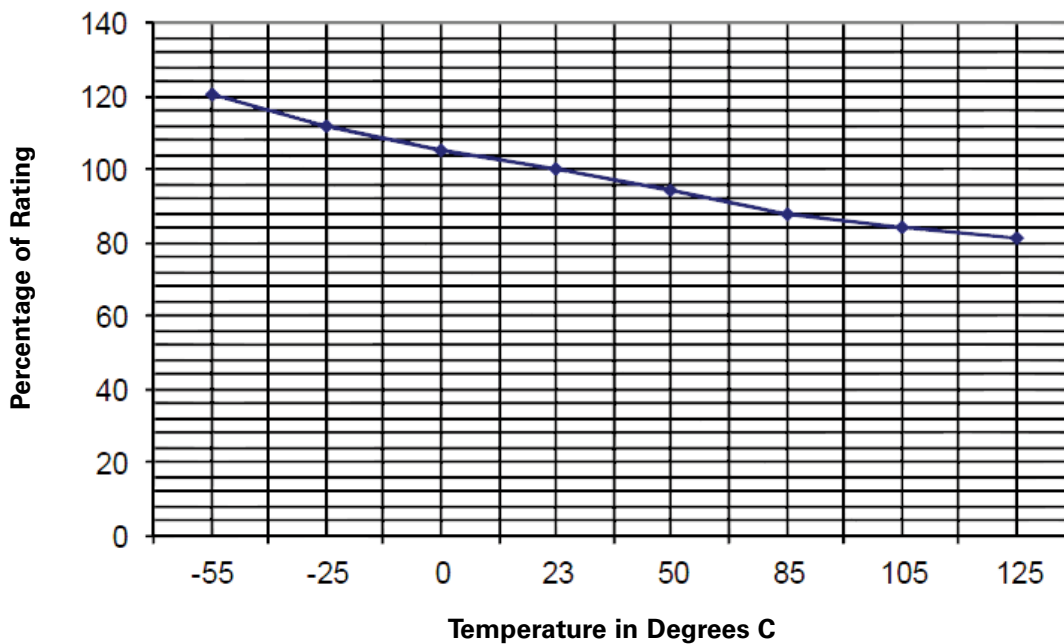

General specifications

Operating temperature: -55 °C to +125 °C (with derating)

Thermal shock: MIL-STD- 202G, Method 107G, test condition B (5 cycles -65 °C to +125 °C)

Vibration: MIL-STD- 202G, Method 201A

Humidity: MIL-STD- 202G, Method 103B, test condition A

Salt spray: MIL-STD- 202G, Method 101D, Test condition B

Ordering codes


The ordering code is the part number replacing the “/” with a “-” plus adding the packaging suffix.

Packaging suffixes

- -TR1 (1500 parts per 10” diameter reel, tape width 60 mm)
- -TR2 (1500 parts per 10” diameter reel, tape width 52 mm)

| Part number | Ordering codes | |
|-----------------|---------------------|---------------------|
| | -TR1 option | -TR2 option |
| C310T-SC-2-R | C310T-SC-2-R-TR1 | C310T-SC-2-R-TR2 |
| C310T-SC-2.5-R | C310T-SC-2-5-R-TR1 | C310T-SC-2-5-R-TR2 |
| C310T-SC-3.15-R | C310T-SC-3-15-R-TR1 | C310T-SC-3-15-R-TR2 |
| C310T-SC-4-R | C310T-SC-4-R-TR1 | C310T-SC-4-R-TR2 |
| C310T-SC-5-R | C310T-SC-5-R-TR1 | C310T-SC-5-R-TR2 |
| C310T-SC-6.3-R | C310T-SC-6-3-R-TR1 | C310T-SC-6-3-R-TR2 |
| C310T-SC-8-R | C310T-SC-8-R-TR1 | C310T-SC-8-R-TR2 |

Wave solder profile

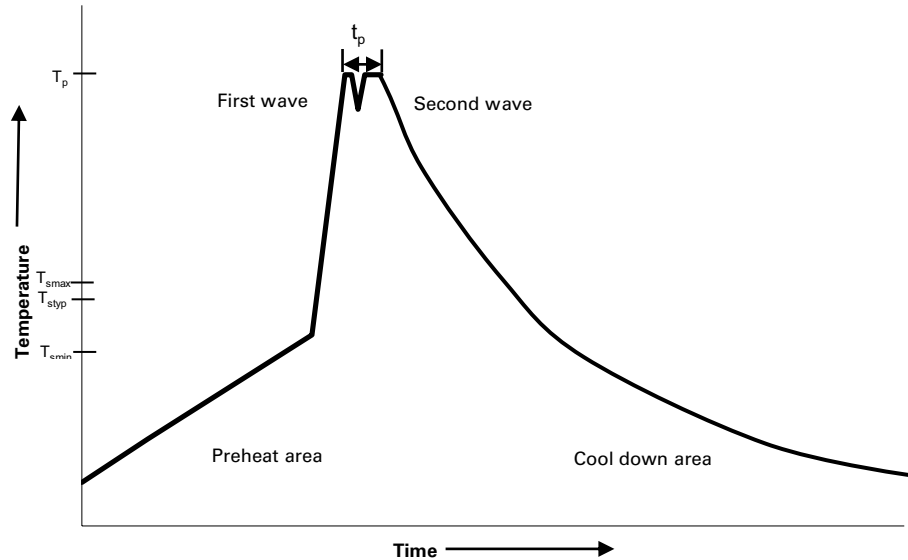

Reference EN 61760-1:2006

| Profile feature | Standard SnPb solder | Lead (Pb) free solder |
|---|---|---|
| Preheat | | |
| • Temperature min. (T_{smin}) | 100 °C | 100 °C |
| • Temperature typ. (T_{styp}) | 120 °C | 120 °C |
| • Temperature max. (T_{smax}) | 130 °C | 130 °C |
| • Time (T_{smin} to T_{smax}) (t_s) | 70 seconds | 70 seconds |
| Δ preheat to max Temperature | 150 °C max. | 150 °C max. |
| Peak temperature (T_p)* | 235 °C – 260 °C | 250 °C – 260 °C |
| Time at peak temperature (t_p) | 10 seconds max 5 seconds max each wave | 10 seconds max 5 seconds max each wave |
| Ramp-down rate | ~ 2 K/s min ~3.5 K/s typ ~5 K/s max | ~ 2 K/s min ~3.5 K/s typ ~5 K/s max |
| Time 25 °C to 25 °C | 4 minutes | 4 minutes |

Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2019 Eaton
All Rights Reserved
Printed in USA
Publication No. 10404 PCN19017M
December 2019

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

