


C44P-R, Film, Metallized Polypropylene, AC Filter, 33 uF, 10%, 640 VAC, 1400 VDC

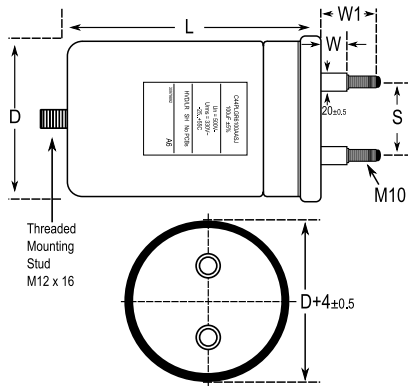

**General Information**

<b>Series:</b>	C44P-R
<b>Dielectric:</b>	Metallized Polypropylene
<b>Style:</b>	Can
<b>Features:</b>	Single Phase PFC
<b>RoHS:</b>	With Exemptions
<b>REACH:</b>	SVHC (Pb – CAS 7439-92-1)
<b>Lead:</b>	Threaded Studs M10
<b>AEC-Q200:</b>	No
<b>Component Weight:</b>	700 g
<b>Miscellaneous:</b>	Thermal Resistance = 9.1 C/W.

**Dimensions**

<b>D</b>	75mm +/-0.5mm
<b>L</b>	147mm +/-2mm
<b>W</b>	21mm +/-1mm
<b>S</b>	35mm +/-1mm
<b>W1</b>	45mm +/-1mm

**Packaging Specifications**

<b>Mounting:</b>	Bolt - M12x16
<b>Packaging:</b>	Bulk, Bag

**Specifications**

<b>Capacitance:</b>	33 uF
<b>Capacitance Tolerance:</b>	10%
<b>Voltage AC:</b>	640 VAC
<b>Voltage DC:</b>	1400 VDC
<b>Temperature Range:</b>	-25/+70°C
<b>Rated Temperature:</b>	70°C
<b>Max dV/dt:</b>	30 V/us
<b>Resistance:</b>	2.2344908 mOhms (10kHz)
<b>Ripple Current:</b>	36 Amps (10kHz 40C)
<b>Inductance:</b>	135 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.