

# MODELS CA811 & CA813

# LIGHTMETER



## FEATURES

- ▶ Easy one-hand operation
- ▶ Designed to measure a wide range of lighting types (Model CA813)
- ▶ Removable sensor for remote reading
- ▶ Measures in foot-candles (fc) or lux (lx)
- ▶ Measures incandescent lighting
- ▶ Cosine corrected
- ▶ Hold function
- ▶ Max function (Model CA811)
- ▶ Peak function (Model CA813)
- ▶ CIE photopic (human eye) response
- ▶ Lightweight and compact
- ▶ Removable protective sensor cover
- ▶ Includes rugged, shockproof, protective, and dirt resistant gray cover

Features optical sensors that are designed to match the response of the human eye

## SPECIFICATIONS


MODELS	CA811	CA813*
Range	20fc, 200fc, 2000fc, 20kfc	20fc, 200fc, 2000fc, 20kfc
	20lx, 200lx, 2000lx, 20klx	20lx, 200lx, 2000lx, 20klx, 200klx
Display Resolution	0.01fc or 0.01lux	
Sensor	Silicon photodiode	
Spectral Response	CIE Photopic Curve	
Accuracy	±5% of Reading	±5% of Reading ±10cts ±11% of Reading ±2cts
	2856K Light Source Common Light Source	
Sample Rate	2.5 times per second, nominal	2.5 times per second, nominal
<b>General</b>		
Display	3½ digit liquid crystal display (LCD), 2000-count	
Operating Temperature	32° to 122°F (0° to 50°C), <80% RH	
Storage Temperature	-4° to 140°F (-20° to 60°C), 0 to 80% RH without battery	
Polarity	Automatic	
Power Source	One 9V Alkaline battery (included)	
Low Battery Indication	Displayed when battery voltage is low	
Dimensions	6.81 x 2.38 x 1.5" (173 x 60.5 x 38mm)	
Weight	Approx. 7.55oz (214g) including battery	Approx. 7.9oz (224g) including battery

## Products 2121.20 & 2121.21 Include

- Shockproof holster
- 9V battery
- User manual

## Applications

- ▶ Testing for OSHA compliance in workplace, cleanroom and industrial settings
- ▶ Ambient testing for light-sensitive displays and archives in museums and art galleries

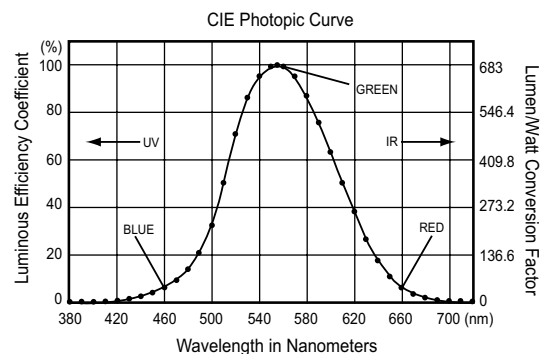

*\*Note: Model CA813 offers higher sensitivity (200klux) and has a better spectral response to common light sources. Model CA811 is used to measure incandescent lighting.*

