

MAGNUM®

Series A1000 & Series CB1000

Single Row Terminal Blocks

SPECIFICATIONS

Rating: 15A, 250V
Center Spacing: .325" (8.26 mm)
Wire Size: #14-22 AWG CU
Screw Size: #6-32 zinc plated philslot wire-ready screws with a #2 driving recess.
Torque Rating: 9 in-lb. max.
Base: Standoffs are standard on CB1000 Series for easy flux washing.
Distance Between Barriers: .26" (6.6 mm)
Recommended PCB Hole Diameter: .070" (1.78 mm)
Operating Temperature: 105°F (221°F) max., -40°C (-40°F) min.
Molded Material: Black, UL Rated 94VO Thermoplastic
Breakdown Voltage: 1600V rms
Approvals: UL E62622; CSA LR15364; IEC Compliance; CE Certified





A102206





CB10210707

A1000 Series

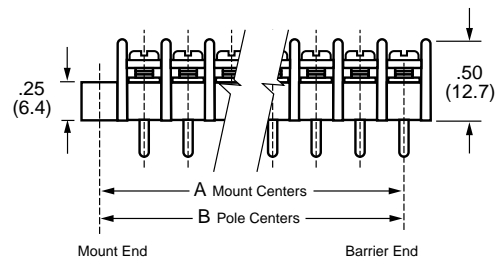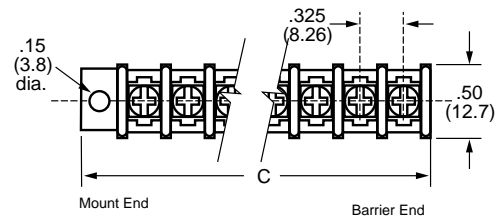

CB1000 Series

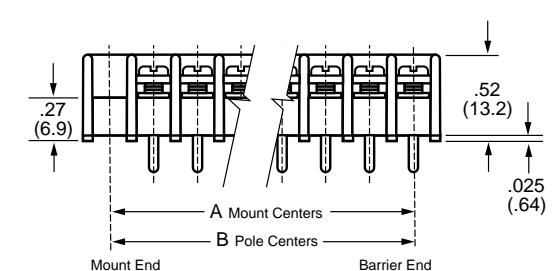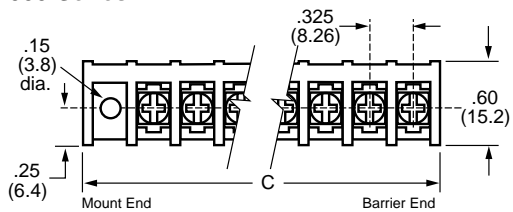

Poles	MOUNTING ENDS ONLY		BARRIER & MOUNTING ENDS B Pole Ctrs.	BARRIER ENDS ONLY C Length
	A Mount Ctrs.	C Length		
02	.98	1.37	.33	.72
03	1.30	1.69	.65	1.04
04	1.63	2.02	.98	1.37
05	1.95	2.34	1.30	1.69
06	2.28	2.67	1.63	2.02
07	2.60	2.99	1.95	2.34
08	2.93	3.32	2.28	2.67
09	3.25	3.64	2.60	2.99
10	3.58	3.97	2.93	3.32
11	3.90	4.29	3.25	3.64
12	4.23	4.62	3.58	3.97
13	4.55	4.94	3.90	4.29
14	4.88	5.27	4.23	4.62
15	5.20	5.59	4.55	4.94
16	5.53	5.92	4.88	5.27
17	5.85	6.24	5.20	5.59
18	6.18	6.57	5.53	5.92
19	6.50	6.89	5.85	6.24
20	6.83	7.22	6.18	6.57
21	7.15	7.54	6.50	6.89
22	7.48	7.87	6.83	7.22
23	7.80	8.19	7.15	7.54
24	8.13	8.52	7.48	7.87
25	8.45	8.84	7.80	8.19
26	8.78	9.17	8.13	8.52
27	9.10	9.49	8.45	8.84
28	9.43	9.82	8.78	9.17
29	9.75	10.14	9.10	9.49
30	10.08	10.47	9.43	9.82
31	10.40	10.79	9.75	10.14
32	10.73	11.12	10.08	10.47
33	11.05	11.44	10.40	10.79
34	11.38	11.77	10.73	11.12
35			11.05	11.44
36			11.38	11.77


* Dimensions in inches. To convert to millimeters, multiply by 25.4.

Part Numbering System

Series	Terminal Style	Base/End	Poles	Screw Options	Options
A n CB n	nn 02 - printed circuit 03 - non feed-thru 04 - wire wrap tail 07 - extended pin	n 1 - mount end 2 - barrier end	nn 02 to 36 02 to 34 on mount end base	nnnn Blank - std. screws 03 - stainless steel 07 - steel SEMS & washer (not available with hardware options) CA - standard captive screw 07CA - SEMS captive	nnn AB & DR - angle mts. (A1 only-pg 6) B1 to B9 - .187" QC (all positions) EB - exit back terminals on CB1 w/07 screw option only JA, JB & JC - barrier jumpers L1 to L6 marking options (pg 23) LT1 to LT6 marking options (CB1 only-pg 23) MP & MT - mounting plates (pg 6) R26 & R45 - right angle bends (A1 only-pg 6)


Terminal Styles

Inches (Millimeters)

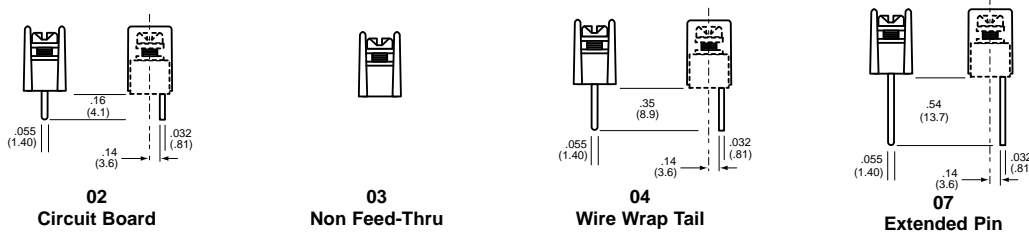

CB1 Terminal Exit Options Tail length is .025" shorter on exit bottom terminals

Inches (Millimeters)

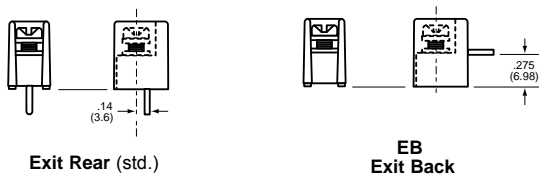


Screw Options Wire ready screws standard on all terminal styles




Hardware Options (Bulk ordering part numbers are in parentheses.)

Jumpers


Quick Connects Blade Width B = .187". (For other orientations, contact factory.)




JA (JA1-XX)




B1 (1B1) *




B2 (1B2) *




B3 (1B3) *




B4 (1B4) *




JB (JB1-XX)




B5 (1B5) *




B6 (1B6) *




B7 (1B7)



B8 (1B8)



JC (JC1-XX)



B9 (1B9)

* N/A on CB1 Series.

Continued

MAGNUM®


Series A1000 & CB1000 Single Row Terminal Blocks *Continued*

Mounting Options

Inches (Millimeters)

Right Angle Bends (A1 only)


Right angle terminals are offered on the A1000 Series. Configurations are defined in these dimensions: X = pin extension beyond the block base; Z = length from block base to centerline of the terminal tip. Standard bends consist of the X and Z dimensions shown in the chart. Specify by adding the selected Bend Option Code to the terminal part no.



Bend Option Code	X (minimum)	Z
R26 (04 terminal only)	.14	.09
R45 (07 terminal only)	.33	.09


Dimensions in inches. To convert to millimeters, multiply by 25.4.

Angle Brackets (A1 only)

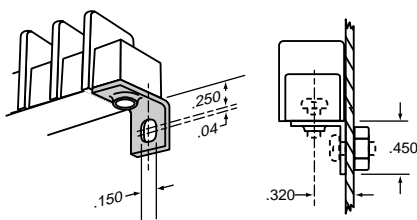


Option AB
Angle brackets enable block to be fastened at right angles to normal mount position. Bulk part no. **1AB**.

Drilled Right Angle (A1 only)

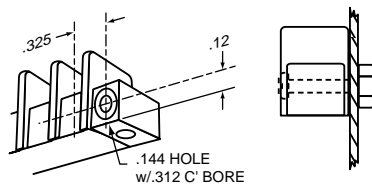

Option DR
Counterbored holes across mount ends of block enable fastening with two screws at right angles to normal mount position.

Mounting Plates

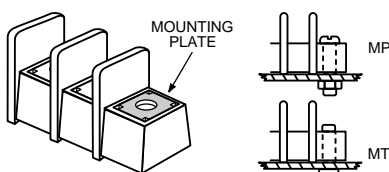

Options MP & MT
MP Metal inserts with .150" dia. hole accept #6 screw. **MT** Metal inserts with tapped hole accept #6-32 screw. Bulk Part Nos. **1MP & 1MT**.