


REVISIONS				DOC. NO.	SPC-F005	Effective:	12/21/98	DCP No.	680
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRD	DATE	
	A	RELEASED	JAP	11/28/91					
1116	B	Bulk items added; Was CBS-TO-****	JWM	4/3/01	JC	4/3/01	JC	4/3/01	

- NOTES:**
1. MAXIMUM CURRENT: SAME AS WIRE
  2. TEMPERATURE RANGE: 175 °C/347 °F MAX.
  3. STRIP AWAY THE END 3/4 INCHES OF WIRE INSULATION
  4. TERMINAL MATERIAL: ETP COPPER
  5. TERMINAL PLATING: TIN
  6. UL LISTED AND CSA CERTIFIED FOR USE ON STRANDED COPPER (AWG) WIRE ONLY

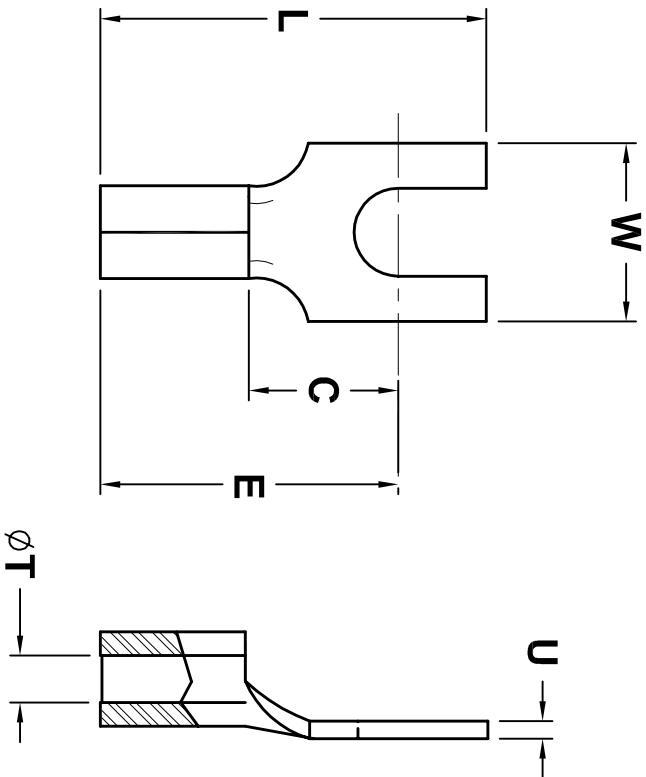

SPC Type No.	Wire Size (AWG)	Stud Size	Pkg QTY	W	C	L	E	U	ØT
SPC3658	12 ~ 10	6 (.138)	1000						
SPC3897	12 ~ 10	8 (.164)	1000	.32	.29	.73	.54	.04	.135
SPC3898	12 ~ 10	10 (.190)	1000						
CBS-TO-1406	16 ~ 14	6 (.138)	100						
SPC3656	16 ~ 14	6 (.138)	1000						
CBS-TO-1408	16 ~ 14	8 (.164)	100	.30					.09
SPC3657	16 ~ 14	8 (.164)	1000						
SPC3896	16 ~ 14	10 (.190)	1000						
CBS-TO-1804	22 ~ 18	4 (.112)	100		.25	.65	.50	.03	
SPC3653	22 ~ 18	4 (.112)	1000						
CBS-TO-1806	22 ~ 18	6 (.138)	100	.25					
SPC3654	22 ~ 18	6 (.138)	1000						.07
CBS-TO-1808	22 ~ 18	8 (.164)	100	.30					
SPC3655	22 ~ 18	8 (.164)	1000	.30					

**DISCLAIMER:**  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, WE MAKE NO WARRANTY, REPRESENTATION OR STATEMENT OF MERCHANTABILITY. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



**SPC TECHNOLOGY**

Non-Insulated Block Fork Terminals

DRAWN BY:	JC	DATE:	3/7/91
CHECKED BY:	JC	DATE:	12/27/91
APPROVED BY:	JL	DATE:	11/27/91

DRAWING TITLE:		Non-Insulated Block Fork Terminals	
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-317	TA-317.dwg	B
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1



LISTED

E38918

LR22190M6

OSHA  
Acceptable