

Crimp contact - CC-0,8-ST-0,34-MS AU - 1452372

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Crimp contact, diameter 0.8 mm, for the 8-pos. contact insert, crimp range from 0.08 mm² - 0.34 mm².



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	100 STK
GTIN	 4 046356 544764
GTIN	4046356544764
Weight per Piece (excluding packing)	0.128 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

Material data

Contact material	CuZn
Contact surface material	AU


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Crimp contact - CC-0,8-ST-0,34-MS AU - 1452372

Dimensional drawing

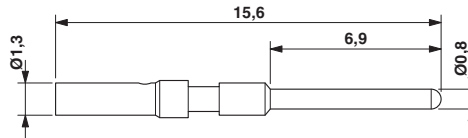

Crimp contact, diameter 0.8 mm

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27440204
eCl@ss 9.0	27440204

ETIM

ETIM 4.0	EC000796
ETIM 5.0	EC000796
ETIM 6.0	EC000796

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	39121522

Approvals

Approvals

Approvals


EAC

Ex Approvals

Crimp contact - CC-0,8-ST-0,34-MS AU - 1452372

Approvals

Approval details

EAC		B.00767
-----	---	---------

Accessories

Accessories

Crimping tool

Crimping pliers - CRIMPFOX-TC MP - 1212510



Crimping pliers, for turned contacts, universal cross section setting, up to a maximum of 2.5 mm², digital display with 0.01 mm increments, pressure lock can be unlocked, including positioning tool