

# Nylon Liquid Tight Strain Relief Fittings

## Multi-Hole - Metric Threads



Nylon Strain Relief

Part Numbers		Thread Type & Size	Dimensions in Inches (mm)			Part Numbers of Inserts Only	
-40°F to 212°F (-40°C to 100°C)			No. of Holes	Diameter of Holes			
Black	Gray	See page 56 for thread specs		mm	Inches		
CD12MP-BK	CD12MP-GY		<b>M12 X 1.5</b>	Solid Insert			1.089.0799.19
CD16M1-BK	CD16M1-GY	<b>M16 X 1.5</b>	4	1.4	.06	1.089.0900.19	
CD16M2-BK	CD16M2-GY		2	3.0	.12	1.089.0901.19	
CD16M3-BK	CD16M3-GY		5	1.6	.06	1.089.0902.19	
CD16M4-BK	CD16M4-GY		2	1.7	.07	1.089.0903.19	
CD16M5-BK	CD16M5-GY		10	1.4	.06	1.089.0904.19	
CD16M6-BK	CD16M6-GY		6	1.4	.06	1.089.0905.19	
CD16M7-BK	CD16M7-GY		3	1.7	.07	1.089.0906.19	
CD16M8-BK	CD16M8-GY		4	1.7	.07	1.089.0907.19	
CD16M9-BK	CD16M9-GY		4	2.3	.09	1.089.0908.19	
CD16MP-BK	CD16MP-GY		Solid Insert			1.089.0999.19	
CD17M1-BK	CD17M1-GY		<b>M16 X 1.5 (Enlarged)</b>	2	3.0	.12	1.089.1100.19
CD17M2-BK	CD17M2-GY			3	3.0	.12	1.089.1101.19
CD17M3-BK	CD17M3-GY			2	4.0	.16	1.089.1102.19
CD17M4-BK	CD17M4-GY	3		1.5	.06	1.089.1103.19	
CD17M5-BK	CD17M5-GY	4		2.8	.11	1.089.1104.19	
CD17MP-BK	CD17MP-GY	Solid Insert			1.089.1199.19		
CD20M1-BK	CD20M1-GY	<b>M20 X 1.5</b>	3	2.0	.08	1.089.1300.19	
CD20M2-BK	CD20M2-GY		6	3.0	.12	1.089.1301.19	
CD20M3-BK	CD20M3-GY		3	4.0	.16	1.089.1302.19	
CD20M4-BK	CD20M4-GY		2	5.0	.20	1.089.1303.19	
CD20M5-BK	CD20M5-GY		3	3.0	.12	1.089.1304.19	
CD20M6-BK	CD20M6-GY		2	5.2	.20	1.089.1305.19	
CD20M7-BK	CD20M7-GY		2	3.8	.15	1.089.1306.19	
CD20M8-BK	CD20M8-GY		2	4.2	.17	1.089.1307.19	
CD20M9-BK	CD20M9-GY		2	2.5	.10	1.089.1308.19	
CD20MP-BK	CD20MP-GY		Solid Insert			1.089.1399.19	
CD22M1-BK	CD22M1-GY		<b>M20 X 1.5 (Enlarged)</b>	3	3.0	.12	1.089.1600.19
CD22M2-BK	CD22M2-GY	3		4.0	.16	1.089.1601.19	
CD22M3-BK	CD22M3-GY	4		4.0	.16	1.089.1602.19	
CD22M4-BK	CD22M4-GY	5		4.0	.16	1.089.1603.19	
CD22M5-BK	CD22M5-GY	6		4.0	.16	1.089.1604.19	
CD22M6-BK	CD22M6-GY	2		6.0	.24	1.089.1605.19	
CD22M7-BK	CD22M7-GY	3		5.6	.22	1.089.1606.19	
CD22M8-BK	CD22M8-GY	6		3.0	.12	1.089.1607.19	
CD22M9-BK	CD22M9-GY	4		3.0	.12	1.089.1610.19	
CD22M0-BK	CD22M0-GY	6		3.8	.15	1.089.1609.19	
CD22MP-BK	CD22MP-GY	Solid Insert			1.089.1699.19		

**\*This Insert has slotted holes.**

**\*UL f1 (746C) rating applies to Black Nylon Fittings only.**

**Fittings with Multi-Hole Inserts are also available with a Flex Nut.**

To order, substitute "CF" for "CD" (e.g. CD16M1-BK becomes CF16M1-BK).

"BP" (Billet Plugs) available upon request.

### Custom Solutions for terminated cable!


For Strain Relief Specifications and Dimensions refer to page 5.  
For Material Specifications and Approval Information refer to page 52.

Part Numbers		Thread Type & Size	Dimensions in Inches (mm)			Part Numbers of Inserts Only	
-40°F to 212°F (-40°C to 100°C)			No. of Holes	Diameter of Holes			
Black	Gray	See page 56 for thread specs		mm	Inches		
CD25M1-BK	CD25M1-GY		<b>M25 X 1.5</b>	4	6.0		.24
CD25M2-BK	CD25M2-GY	3		7.0	.28	1.089.2101.19	
CD25M3-BK	CD25M3-GY	2		8.0	.31	1.089.2102.19	
CD25M4-BK	CD25M4-GY	4		5.0	.20	1.089.2103.19	
CD25M5-BK	CD25M5-GY	1		8.0	.31	1.089.2104.19	
CD25M6-BK	CD25M6-GY	4		5.2	.20	1.089.2105.19	
CD25M7-BK	CD25M7-GY	3		5.2	.20	1.089.2106.19	
CD25M8-BK	CD25M8-GY	4/1		5.2/3.7	.20/.15	1.089.2107.19	
CD25M9-BK	CD25M9-GY	2		7.4	.29	1.089.2108.19	
CD25MP-BK	CD25MP-GY	Solid Insert			1.089.2199.19		
CD32M1-BK	CD32M1-GY	<b>M32 X 1.5</b>		6	6.5	.26	1.089.2900.19
CD32M2-BK	CD32M2-GY			4	9.0	.35	1.089.2901.19
CD32M3-BK	CD32M3-GY			4	9.5	.37	1.089.2902.19
CD32MP-BK	CD32MP-GY		Solid Insert			1.089.2999.19	
CD40M1-BK	CD40M1-GY	<b>M40 X 1.5</b>	5	9.0	.35	1.089.3600.19	
CD40M2-BK	CD40M2-GY		7	9.0	.35	1.089.3601.19	
CD40M3-BK	CD40M3-GY		6	8.0	.31	1.089.3602.19	
CD40M4-BK	CD40M4-GY		2	15.0	.59	1.089.3603.19	
CD40MP-BK	CD40MP-GY		Solid Insert			1.089.3699.19	
CD50M1-BK	CD50M1-GY	<b>M50 X 1.5</b>	3	14.0	.55	1.089.4203.19	
CD50MP-BK	CD50MP-GY		Solid Insert			1.089.4299.19	
CD63M1-BK	CD63M1-GY	<b>M63 X 1.5</b>	8	10.0	.39	1.089.4800.19	
CD63M2-BK	CD63M2-GY		6	12.0	.47	1.089.4801.19	
CD63M3-BK	CD63M3-GY		3	18.0	.71	1.089.4802.19	
CD63MP-BK	CD63MP-GY		Solid Insert			1.089.4899.19	

### RJ45 Solution

Part Numbers		Thread Type & Size	Dimensions in Inches (mm)		Part Numbers of Inserts Only
-40°F to 212°F (-40°C to 100°C)			Cable Diameter		
Black	Gray	See page 56 for thread specs	mm	Inches	
CD22MK-BK	CD22MK-GY		<b>M20</b>	5.7	
CD22MJ-BK	CD22MJ-GY	<b>(Enlarged)</b>	6.9	.27	1.089.16C-07

**\*RJ45 Solution has no approval ratings. Reference Diagram below.**

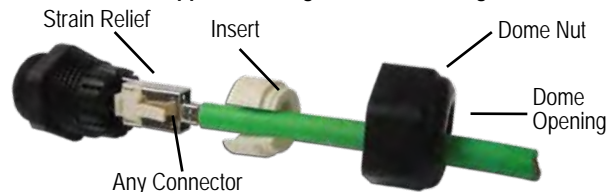

Dome Fittings also available with the following approvals:



www.SealconEX.com



Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.