


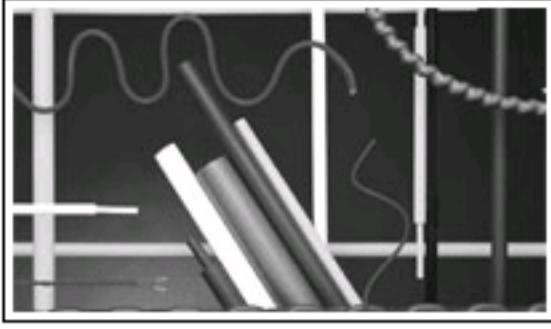

CGPT-25.4/12.7-2-SP Product Details

[Share](#) | [Print](#) | [Email](#)


CGPT-25.4/12.7-2-SP

TE Internal Number: 5068114005
✔ Active

Heat Shrink Tubing

✔ Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Heat Shrinkable Tubing
- Product Name = CGPT
- Product Source = U.K.
- Flexible
- Thin Wall Style

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Heat Shrinkable Tubing
- [Color](#) = Red

Dimensions:

- [Expanded ID, Min.](#) (mm [in]) = 25.40 [1.000]
- [Recovered ID, Max.](#) (mm [in]) = 12.70 [0.500]

Body Features:

- [Product Name](#) = CGPT
- [Pliancy](#) = Flexible
- [Wall Style](#) = Thin
- [Wall Type](#) = Single
- [Material](#) = Crosslinked Polyolefin
- [Shrink Ratio](#) = 2:1
- [Fluid Type](#) = Brake Fluid, Chemicals/Solvents, Water
- [Resistant To](#) = Fluids, Mechanical Damage, Strain
- [Wall Thickness - Full Recovery \(Nominal\)](#) (mm [in]) = 0.90 [0.0354]

Housing Features:

- [Material Systems](#) = No

Industry Standards:

- [Government/Industry Qualification](#) = No
- [Flammability Rating Type](#) = Flame-Retardant
- [UL Rating](#) = Recognized
- [CSA Certified](#) = Yes
- [Approved Standards](#) = CSA LR31929, UL E35586
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Environmental:

- [Fluid Resistance](#) = Splash Protection
- [Operating Temperature \(°C\)](#) = -40 - +135

Conditions for Usage:

- [Full Recovery Temperature \(°C\)](#) = 120
- [Shrink Temperature, Min. \(°C\)](#) = 80
- [High Temperature Compatible](#) = No

Operation/Application:

- [Application](#) = Cable Bundling, Cable Jacketing, Color Coding, Identification, Insulation and Protection
- [Emission Free](#) = No
- [Product Use](#) = Cables, Electronic Components, Pipes, Wires

Packaging Features:

- [Packaging Method](#) = Spool

Product Availability:

- [Product Source](#) = U.K.

Other:

- [Brand](#) = Raychem

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

[▶](#)

