



12 and 19-Pin M23 multifast® Receptacles, Rear Mount

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout
	CKFD 12-7-*	UL Nickel Plated Brass 7x18 AWG 105°C 300 V, 6 A	4-port, 1 Signal per port	1. BN 7. YE 3. BU 8. CY 4. WH 12. GN/YE 6. GN
	CKFD 12-9-*	UL Nickel Plated Brass 9x18 AWG 105°C 300 V, 6 A	6-port, 1 Signal per port	1. BN 8. CY 3. BU 9. PK 4. WH 10. RD 6. GN 12. GN/YE 7. YE
	CKFD 12-11-*	UL Nickel Plated Brass 11x18 AWG 105°C 300 V 6 A	8-port, 1 Signal per port	1. BN 7. GY 3. BU 8. PK 4. WH 9. RD 5. GN 10. BK 6. YE 11. VT 12. GN/YE
	CKFD 12-12-*	UL Nickel Plated Brass 12x18 AWG 105°C 300 V 6 A	8-port, 1 Signal per port	1. BN 7. GY 2. OG 8. PK 3. BU 9. RD 4. WH 10. BK 5. GN 11. VT 6. YE 12. GN/YE
	CKFD 12-12-*/S817	UL Nickel Plated Brass 12x18 AWG 105°C 300 V 6 A	8-port, 1 Signal per port	1. BN 7. GY 2. BU 8. PK 3. WH 9. RD 4. GN/YE 10. BN/WH 5. OG 11. BU/WH 6. YE 12. GN/WH
	CKFD 19-11-*	UL Nickel Plated Brass 3x18, 8x22 AWG 105°C 150 V 8 A 9 A (pins 6, 12, 19) 2 A (all other pins)	4-port, 2 Signals per port	3. GY 12. GN/YE 4. RD/BU 14. BN/GN 5. GN 15. WH 6. BU 16. YE 7. GY/PK 19. BN 8. WH/GN
	CKFD 19-15-*	UL Nickel Plated Brass 3x18, 12x22 AWG 105°C 150 V 9 A (pins 6, 12, 19) 2 A (all other pins)	6-port, 2 Signals per port	2. RD 9. WH/YE 3. GY 12. GN/YE 4. RD/BU 13. YE/BN 5. GN 14. BN/GN 6. BU 15. WH 7. GY/PK 16. YE 8. WH/GN 17. PK 19. BN
	CKFD 19-19-*	UL Nickel Plated Brass 3x18, 16x22 AWG 105°C 150 V 9 A (pins 6, 12, 19) 2 A (all other pins)	8-port, 2 Signals per port	1. VT 11. BK 2. RD 12. GN/YE 3. GY 13. YE/BN 4. RD/BU 14. BN/GN 5. GN 15. WH 6. BU 16. YE 7. GY/PK 17. PK 8. WH/GN 18. GY/BN 9. WH/YE 19. BN 10. WH/GY




Receptacles

See page H50 for dimensional drawings.

To specify PVC jacketed cable, add "/S717" to the end of the part number.


multifast® Receptacles

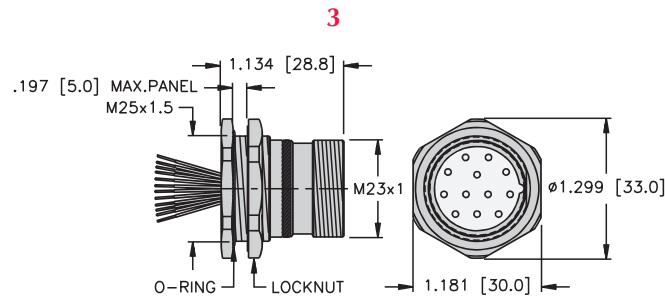

Typical panel cutout is 25.4 x 24.3x25.4 mm.

CS(K)FD

Page H59 - H66

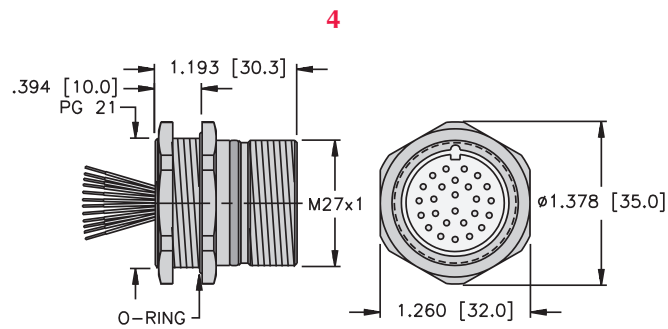

Typical panel cutout is 28.3 mm.

DS(K)F

Page H67 - H68