


Standard Pluggable PCB Terminal Block Header

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

SPECIFICATIONS

Housing Material: PA68 Polyamide, Flammable UL94V0
 Housing Color: Green
 Screw: Zinc Plated Steel
 Clamp: Nickel Plated Brass
 Pin: Tin Plated Brass
 P.C.B. mounting hole: 1.6mm
 Nominal current: 12 A
 Voltage: 300 V
 Temperature Range: -30° C to 85° C

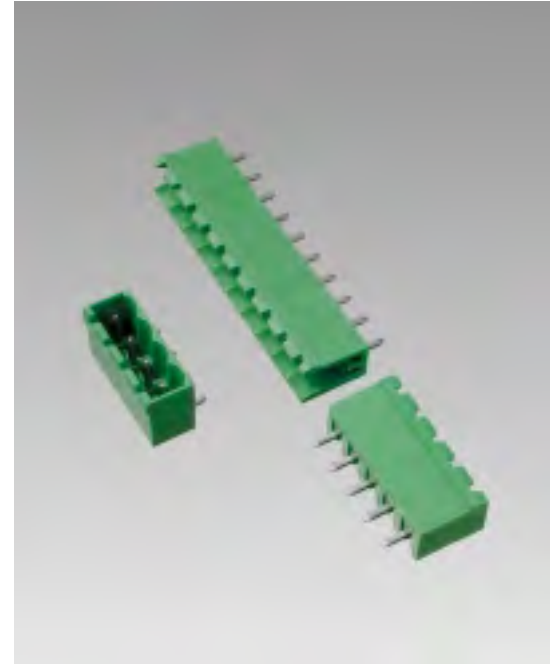

CPM .../...		Catalog #		No. of Positions	Length (mm)
P	L mm	CPM5.08-2SQ	2	11.36	
5	5 x p +1.2	CPM5.08-3SQ	3	16.44	
5.08	5.08 x p +1.2	CPM5.08-4SQ	4	21.52	
10	10 x p -3.8	CPM5.08-5SQ	5	26.60	
10.16	10.16 x p -3.88	CPM5.08-6SQ	6	31.68	
		CPM5.08-7SQ	7	36.76	
		CPM5.08-8SQ	8	41.84	
		CPM5.08-9SQ	9	46.92	
		CPM5.08-10SQ	10	52.00	
		CPM5.08-11SQ	11	57.08	
		CPM5.08-12SQ	12	62.16	
		CPM5.08-13SQ	13	67.24	
		CPM5.08-14SQ	14	72.32	
		CPM5.08-15SQ	15	77.40	
		CPM5.08-16SQ	16	82.48	
		CPM5.08-17SQ	17	87.56	
		CPM5.08-18SQ	18	92.64	
		CPM5.08-19SQ	19	97.72	
		CPM5.08-20SQ	20	102.80	
		CPM5.08-21SQ	21	107.88	
		CPM5.08-22SQ	22	112.96	
		CPM5.08-23SQ	23	118.04	
		CPM5.08-24SQ	24	123.12	

To locate additional product specifications and technical drawings go to www.asi-ez.com