


Standard Pluggable PCB Terminal Block Header

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

SPECIFICATIONS

Housing Material: PA68 Polyamide, Flammable UL94V0
 Housing Color: Green
 Screw: Zinc Plated Steel
 Clamp: Nickel Plated Brass
 Pin: Tin Plated Brass
 P.C.B. mounting hole: 1.6mm
 Nominal current: 12 A
 Voltage: 300 V
 Temperature Range: -30° C to 85° C

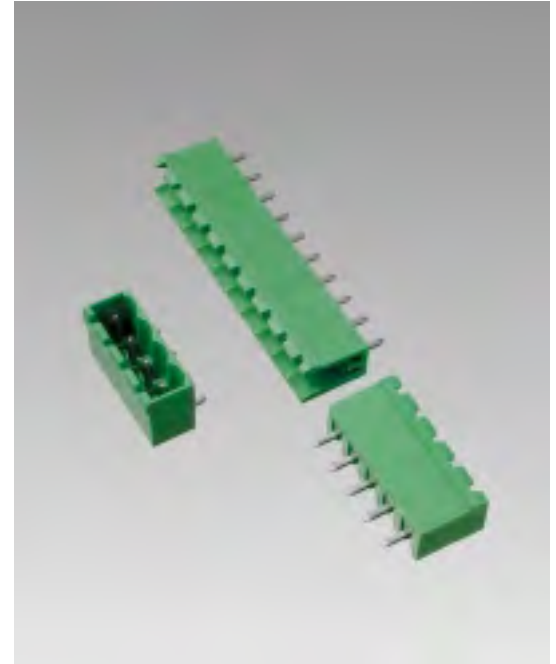

CPM .../...		CPM .../...SQ		Catalog #	No. of Positions	Length (mm)
P	L mm	8.3	3.8	CPM5.08-2	2	11.36
5	5 x p +1.2		3.9	CPM5.08-3	3	16.44
5.08	5.08 x p +1.2		12	CPM5.08-4	4	21.52
10	10 x p -3.8			CPM5.08-5	5	26.60
10.16	10.16 x p -3.88			CPM5.08-6	6	31.68
				CPM5.08-7	7	36.76
				CPM5.08-8	8	41.84
				CPM5.08-9	9	46.92
				CPM5.08-10	10	52.00
				CPM5.08-11	11	57.08
				CPM5.08-12	12	62.16
				CPM5.08-13	13	67.24
				CPM5.08-14	14	72.32
				CPM5.08-15	15	77.40
				CPM5.08-16	16	82.48
				CPM5.08-17	17	87.56
				CPM5.08-18	18	92.64
				CPM5.08-19	19	97.72
				CPM5.08-20	20	102.80
				CPM5.08-21	21	107.88
				CPM5.08-22	22	112.96
				CPM5.08-23	23	118.04
				CPM5.08-24	24	123.12

To locate additional product specifications and technical drawings go to www.asi-ez.com