


Standard Pluggable PCB Terminal Block Header

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

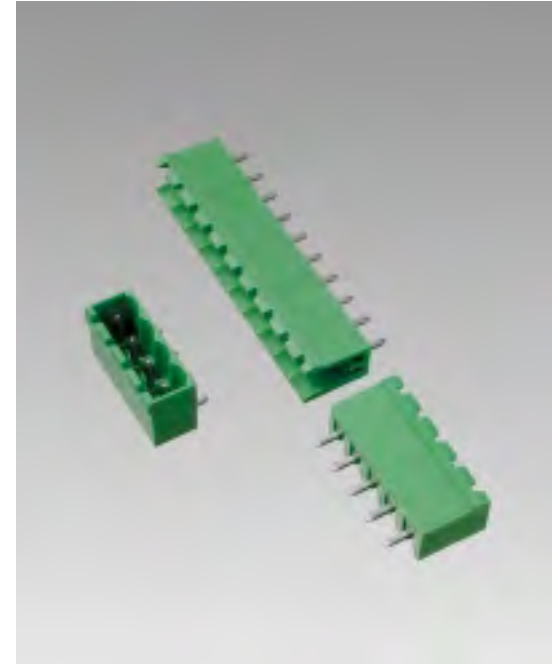

SPECIFICATIONS

Housing Material:	PA68 Polyimide, Flammable UL94V0
Housing Color:	Green
Screw:	Zinc Plated Steel
Clamp:	Nickel Plated Brass
Pin:	Tin Plated Brass
P.C.B. mounting hole:	1.6mm
Nominal current:	12 A
Voltage:	300 V
Temperature Range:	-30° C to 85° C



CPM .../...		CPM .../...SQ		Catalog #	No. of Positions	Length (mm)
P	L mm			CPM5-2A	2	10
5	5 x p +1.2			CPM5-3A	3	15
5,08	5,08 x p +1.2			CPM5-4A	4	20
10	10 x p -3.8			CPM5-5A	5	25
10,16	10,16 x p -3,88			CPM5-6A	6	30
				CPM5-7A	7	35
				CPM5-8A	8	40
				CPM5-9A	9	45
				CPM5-10A	10	50
				CPM5-11A	11	55
				CPM5-12A	12	60
				CPM5-13A	13	65
				CPM5-14A	14	70
				CPM5-15A	15	75
				CPM5-16A	16	80
				CPM5-17A	17	85
				CPM5-18A	18	90
				CPM5-19A	19	95
				CPM5-20A	20	100
				CPM5-21A	21	105
				CPM5-22A	22	110
				CPM5-23A	23	115
				CPM5-24A	24	120

To locate additional product specifications and technical drawings go to www.asi-ez.com