


# Miniature, Modular Fixed PCB Terminal Blocks

The CPP sub-miniature printed circuit board terminal blocks are one of the smallest designs on the market. The housings are modular and interlocking in 2 and 3 positions, and can be combined to come up with any number of circuits, thereby reducing inventory requirements. This sub-miniature printed circuit board terminal block is UL recognized, is rated at 16 to 30 A WG, and 10 amps at 300 volts. The CPP incorporates a moving metal body design for wire termination and features high quality metal and plating materials. The CPP standard color is green, however other colors are available upon request.



## SPECIFICATIONS

Housing Material:	PA68 Polyimide, Flammable UL94V0
Housing Color:	Green
Screw:	Zinc Plated Steel
Clamp:	Nickel Plated Brass
Pin:	Tin Plated Brass
Testing torque:	2.7 in/lb
Wire range:	16-30 AWG
P.C.B. mounting hole:	1.1mm
Nominal current:	10 A
Voltage:	300 V
Temperature Range:	-30° C to 110° C

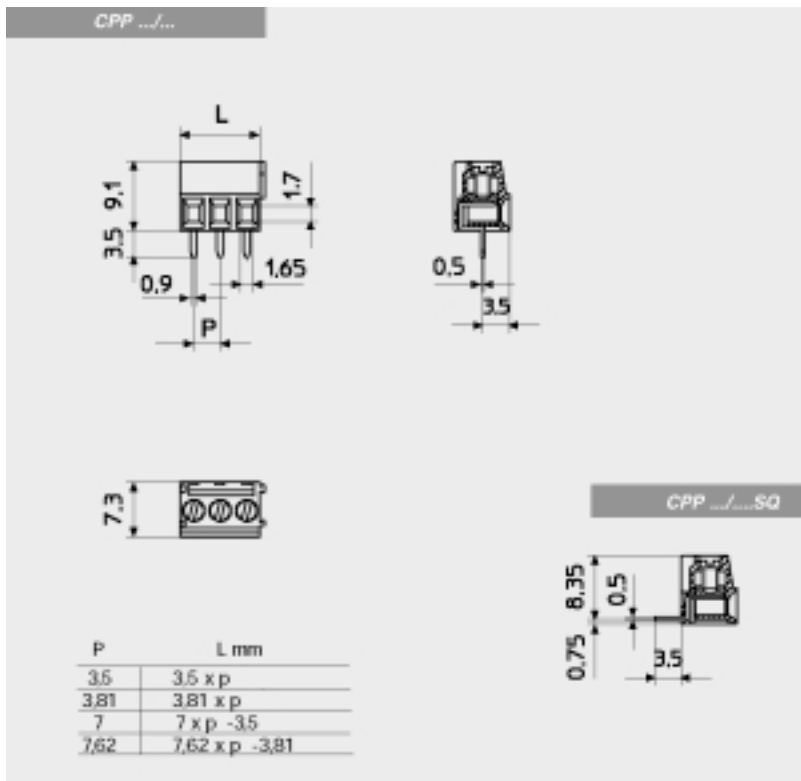

Catalog #	No. of Positions	Length (mm)
CPP3.81-2VE	2	7.62
CPP3.81-3VE	3	11.43

To locate additional product specifications and technical drawings go to [www.asi-ez.com](http://www.asi-ez.com)