


Cylinder Type PAS Capacitor(Low ESR type)

PAS0815LS2R5105

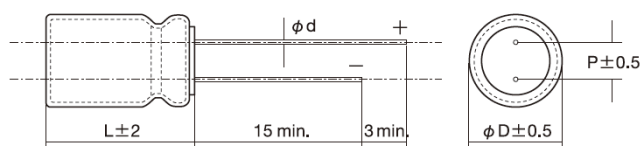

■ Features

- Item Summary
1F, 2.5V, $\phi 8.0 \times 15.0 \text{ mm}$
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Bulk 200pcs

■ Products characteristics table

Capacitance	1 F
Max. Usable Voltage	2.5 V (at -25 to +70 °C)
Internal Resistance (typ)	50 m Ω
Initial Capacitance	1 F $\pm 20\%$
Initial Internal Resistance	70 m Ω max
Operating Temp. Range	-25 to +70 °C
RoHS2 Compliance (10 subst.)	Yes
REACH Compliance (168 subst.)	Yes
Soldering	Wave

■ External Dimensions

Dimension D	$\phi 8.0 \pm 0.5 \text{ mm}$
Dimension L	$15.0 \pm 2.0 \text{ mm}$
Dimension d	$\phi 0.6 \text{ mm}$
Dimension P	$3.5 \pm 0.5 \text{ mm}$

2016.05.13

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.