


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/27/13	D.GRIFFIN
B	ECN 7297: UPDATED OVERMOLD DESIGN. UPDATED ROHS NOTE AND FORMAT	2/17/14	D. DESJARDIN

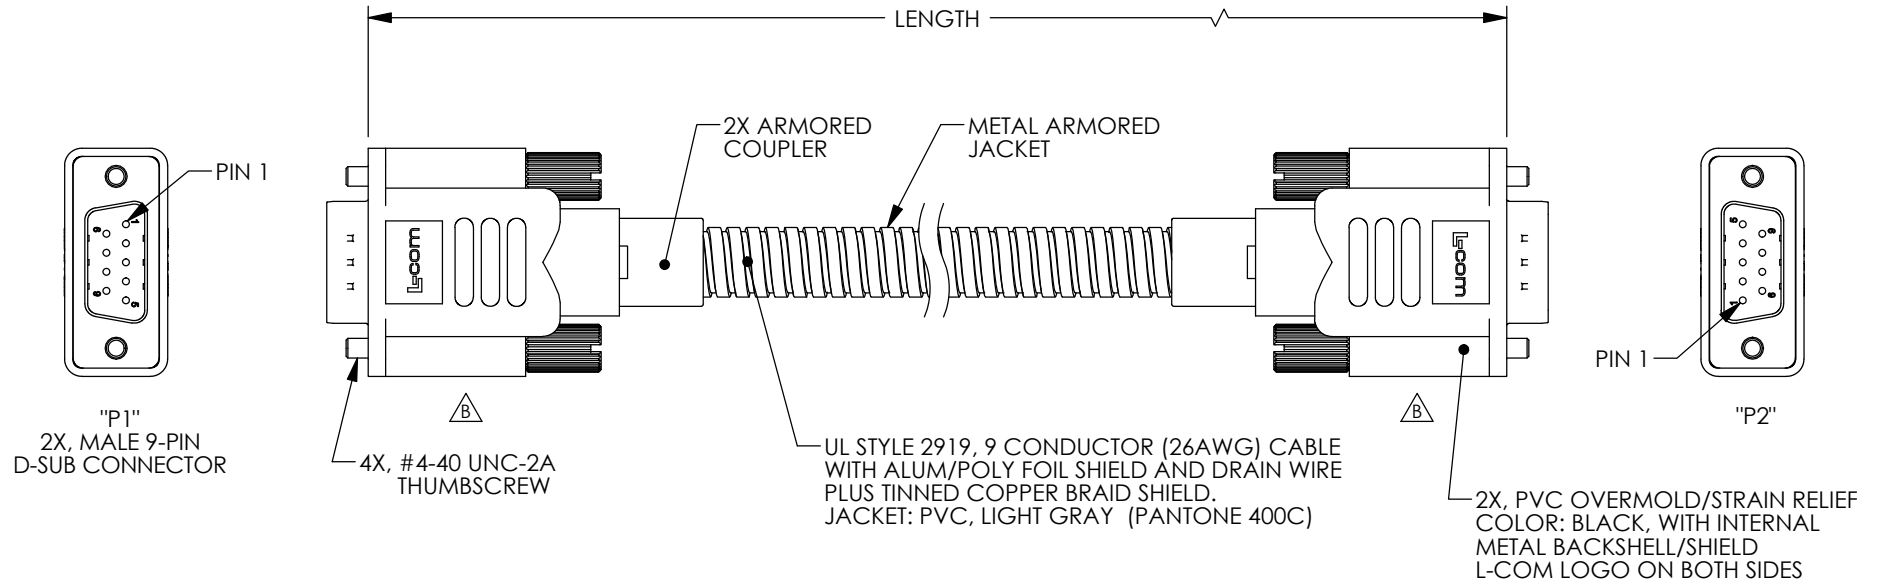

"P1"
2X, MALE 9-PIN
D-SUB CONNECTOR

"P2"

"P1"	WIRE COLOR	"P2"
1	BLACK	1
2	RED	2
3	ORANGE	3
4	YELLOW	4
5	GREEN	5
6	BLUE	6
7	VIOLET	7
8	GRAY	8
9	BROWN	9
SHELL	DRAIN WIRE	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
CSMT9MM-2.5	2.5	.76
CSMT9MM-5	5.0	1.52
CSMT9MM-10	10.0	3.05
CSMT9MM-15	15.0	4.57
CSMT9MM-25	25.0	7.62
CSMT9MM-50	50.0	15.24

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	5/11/11		CATEGORY D-SUBMINIATURE
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CHECKED BY D.PARHAM	5/11/11	PRODUCT DESCRIPTION CA DB9M/M MTL ARMR	
PROJECTION 	APPROVED BY S.SMITH	5/11/11	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A
	COLOR VARIATIONS MAY OCCUR	CS2N-FS01	FSCM NO. 43321	DWG. NO. CSMT9MM
			SCALE: NONE	CAD FILE: CSMT9MM.SLDRW
				SHEET 1 OF 1