


Surface Mount PLCC Sockets

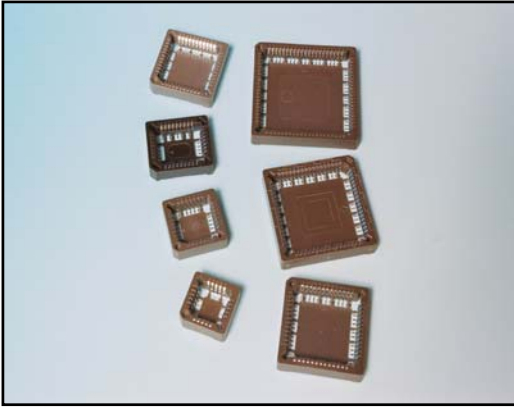

ORDERING GUIDE

D00 - 020 - 4 9 0 - 001

Series
 # of Contacts
 Contact Plating
 Contact Tail
 Profile
 Package

FEATURES

- Low profile design
- Seven different circuit sizes: 20 thru 84 way
- Available in tubes or tape and reel

SPECIFICATIONS

- Insulator: polyphenylene sulfide, UL94V-0 rated
- Contact Material: phosphor bronze
- Insulation resistance: 100 Megohms minimum
- Contact resistance: 30 milliohms maximum
- Plating: tin/lead over nickel, 150u" minimum
- Temperature: -55 to +105 degrees C
- Dielectric withstanding: 500VAC (+MS) for one minute

Series

D00 PLCC socket

Number of Contacts

020-084

Contact Plating

2 gold flash
 3 15u" gold
 4 150 tin/lead over nickel
 6 30u" gold
 9 50u" gold

Contact Tail

9 surface mount

Profile

0 low profile

Package

000 tape and reel
 001 tube

EDAC Part #	Description	Tube Qty	Tape & Reel Qty
D00-020-490-00X	20 contact	37	450
D00-028-490-00X	28 contact	32	400
D00-032-490-00X	32 contact	38	500
D00-044-490-00X	44 contact	35	300
D00-052-490-00X	52 contact	22	250
D00-068-490-00X	68 contact	18	225
D00-084-490-00X	84 contact	15	200

FOR MORE INFORMATION VISIT www.edac.net OR EMAIL edac@edac.net
Phone: 416-754-3322 Fax: 416-754-3299