

EvoMaxx  
XL

# Multifunktions Seitenschneider, C60

## Multifunctional HD Diagonal Cutter, C60



technische Daten:  
technical specifications:

-----		∅ mm			⚖
mm	"	MH	H	P	g
180	7	3,5	2,5	2,0	270



Abisolieren  
Stripping  
1,5 + 2,5 mm<sup>2</sup>



Aderendhülsen crümpen  
Crimping of ferrules  
1,5 - 2,5mm<sup>2</sup>



Abschneiden von Messingschrauben  
Plain shearing of brass screws  
M 3,5 + M 4



Ösen biegen  
Looping device  
∅ 4, 5, 6 mm



Flachschneider  
Accurate flat cutter



Seitenschneider  
Diagonal cutter  
14 mm length


# EvoTel

## KraftTelefonzange, C60 HD Long Nose Pliers, C 60



technische Daten:  
technical specifications:

		∅ mm			⚖
mm	"	MH	H	P	g
220	9	3,0	2,0	1,4	295

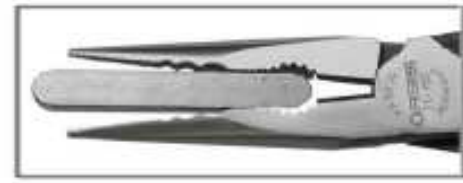



## Aderendhülsenzange für Aderendhülsen DIN 46 228

Spezifikationen						DIN ISO 5743	
Artikel- nummer	2022	mm		"	mm <sup>2</sup>	g	
		mm	"			⊂	⊃
49-140	•	145	5 ¾		0,25-2,5mm <sup>2</sup>	130	
49-180	•	180	7		0,25-16mm <sup>2</sup>	250	



## Crimping pliers for cable terminals according to DIN 46 228




Specification						DIN ISO 5743	
Ref. No.	2022	mm		"	mm <sup>2</sup>	g	
		mm	"			⊂	⊃
49-140	•	145	5 ¾		0,25-2,5mm <sup>2</sup>	130	
49-180	•	180	7		0,25-16mm <sup>2</sup>	250	





## Aderendhülsen-Set


bestehend aus Artikel 49-180 und  
Spannungsprüfer, je 100 Stück isolierten  
Aderendhülsen 0,5; 0,75; 1,5; 2,5mm<sup>2</sup>  
sowie 50 Stück 4mm<sup>2</sup>

Spezifikationen				DIN ISO 5743	
Artikel- nummer	2022	mm	"	0,25-16mm <sup>2</sup>	g 
					 
76-330	•				700



## Crimp assortment

consists of item 49-180, voltage tester  
and cable terminals 0,5; 0,75; 1,5;  
2,5mm<sup>2</sup> à 100 pcs. and 50 pcs. 4mm<sup>2</sup>

Specification				DIN ISO 5743	
Ref. No.	2022	mm	"	0,25-16mm <sup>2</sup>	g 
					 
76-330	•				700







Wasserpumpenzange -  
Klassisches Modell  
mit durchgestecktem Gelenk  
(6- bzw. 7-fach Raste)

Spezifikationen										DIN ISO 8976	
Artikel- nummer	2600	2622	2700			mm		R: $\frac{1}{2}$ "-1" S:10-48mm	g		
							"				
77-170	•	•	•			170	6 $\frac{3}{4}$	R: $\frac{1}{2}$ "-1" S:10-48mm	145	160	
77-250	•	•	•			250	10	R: $\frac{3}{4}$ "-1 $\frac{1}{4}$ " S:10-48mm	275	290	
77-300	•	•	•			300	11 $\frac{3}{4}$	R: $\frac{1}{2}$ "-1 $\frac{1}{2}$ " S:10-48mm	465	480	



Waterpump pliers -  
Classic  
with box joint  
(6 or 7 postions)

Specification										DIN ISO 8976	
Ref. No.	2600	2622	2700			mm		R: $\frac{1}{2}$ "-1" S:10-48mm	g		
							"				
77-170	•	•	•			170	6 $\frac{3}{4}$	R: $\frac{1}{2}$ "-1" S:10-48mm	145	160	
77-250	•	•	•			250	10	R: $\frac{3}{4}$ "-1 $\frac{1}{4}$ " S:10-48mm	275	290	
77-300	•	•	•			300	11 $\frac{3}{4}$	R: $\frac{1}{2}$ "-1 $\frac{1}{2}$ " S:10-48mm	465	480	

