



Products

- Circuit Protection
 - Polyswitch Devices
 - Fuses
 - ESD Protection Devices
 - Gas Discharge Tubes
 - 2Pro Devices
 - PolyZen Devices
- Connectors & Connector Components
 - Cable/Wire Applied Interconnects
 - Input/Output
 - Board-to-Board Connectors
 - Power Products
 - RF & Coax
 - Socket/Card Products
 - Terminal Blocks & Strips
 - Terminals & Splices
 - Connector Picture Search
 - Aerospace, Defense & Marine
 - Energy & Power
- Fiber Optics and Fiber Management Solutions
 - Advanced Fiber Optic Products
 - Standard Fiber Optic Connectors & Cable Assemblies
 - Fiber Management & Packaged Solutions
 - Premises Wiring & Telecom Outside Plant
- Filters
 - Power Filters
 - RF & Signal Filters
- Identification Products
 - Cable Identification
 - Hardware & Software Products
 - Pressure Sensitive Adhesive Labels
- Passive Components
 - Resistors
 - Inductors
 - Capacitors
 - Transformers
- Relays, Switches and Sensors
 - Circuit Breakers
 - Heat Sinks
 - Relays
 - Sensors
 - Switches & Knobs
 - Timers
- Tooling Products
- Touch Solutions
 - Touchmonitors
 - Touchcomputers
 - Touchscreens
 - Custom Solutions
- Tubing & Harnessing Products
 - Aerospace Harnessing & Heat Shrink Harness Components
 - Cable Identification
 - Cable Terminators & Adapters
 - Cable Wrap & Bundling
 - Harnessing Conduit Systems
 - Tubing & Molded
- Wire, Cable, Cable Assemblies
 - Wire & Cable
 - Cable Assemblies
- Wireless Coverage & Capacity Solutions
 - Cell Site
 - RF Antenna Products
 - RF Distribution/DAS
 - Wireless Backhaul

View All Product Types...

- By Type
- By Brand
- A to Z
- New Products

Industries

- Aerospace, Defense & Marine
- Appliances
- Automotive
- Business & Retail Equipment Solutions
- Commercial & Building Technology
- Communications
- Data Center
- Data Communications
- Hybrid & Electric Mobility Solutions
- Energy
- Enterprise Networks
- Home Entertainment
- Industrial
- Lighting
- Medical
- Mobile Devices
- Personal Computers
- Railway
- Solar
- Telecom Networks
- Test and Measurement
- Subsea Communications
- Wireless
- View All Industry Solutions...

Resources

- Cross Reference Products
- Find Documents & Drawings
- Check Distributor Inventory
- Find Authorized Distributors
- Electrical Models
- NAFTA Certificate of Origin
- White Papers
- Check Product Compliance
- Compare Multiple Products
- Media Resource Center
- Glossary of Terms

About TE

- Who We Are
- 2011 Annual Report
- TE Responsibility
- Investors
- News Room
- Supplier Portal
- Careers


Support Center

My Account

Home > Products > Relays > Product Feature Selection > Product Details

Share Print Email

D3210 Product Details

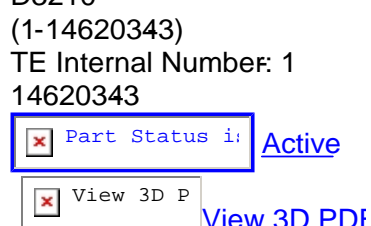

Communications/Signal PC Board Relays

Converted to EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- D32 / FX Relay Series
- DC Actuating System
- Input Voltage = 9 VDC
- Contact Arrangement = 2 Form C, DPDT, 2 C/O
- Contact Rated Current = 2 A

View all Features

Add to My Part List

Request Sample

Find Similar Products

Buy Product

Documentation & Additional Information

Product Drawings:

- FX2-Relay (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- FX2 Relay Datasheet (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version A5)
- 3D Model (IGES, Version A5)
- 3D Model (STEP, Version A5)

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Series = D32 / FX Relay
- Termination Type = Through Hole

Electrical Characteristics:

- Actuating System = DC
- Input Voltage (VDC) = 9
- Contact Rated Current (A) = 2
- Coil Resistance (Ω) = 574
- Coil - Rated Power (mW) = 140
- Insulation Special Features = FCC Part 68 Isolation
- Insulation Initial Dielectric Between Contacts and (V rms) = 1800

Body Features:

- Polarized = Yes

Contact Features:

- Mounting Options = PC Board
- Enclosure Type = Immersion Cleanable
- Contact Base Material = Palladium Ruthenium, G Overlay
- Approx. Dimensions (L x W x H) (mm [in]) = 15.01 [0.591] x 10.70 [0.421]
- Option = Bellcore GR1089
- DIP Package Style = Vertical
- Contact Configuration = Bifurcated
- Pin Configuration = DIP

Configuration Features:

- Contact Arrangement = 2 Form C, DPDT, 2 C/O
- Coil - Magnetic System = Polarized, Monostable
- Coil Suppression Diode = Without

Industry Standards:

- Approved Standards = CECC Approved, CSA Certified, IEC 60950, UL Recognized, UL1950
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Process = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive

Other:

- Brand = Axicom
- Comment = Bellcore also between open contacts

Quick Link

- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

Corporate Information

- Who We Are
- Investors
- News Room
- Supplier Portal
- Careers

Quick Links

- Check Distributor Inventory
- Cross Reference
- Find Documents & Drawings
- Product Compliance Support Center
- Site Map

Customer Support

- Email or Chat With Us
- Find a Phone Number
- Search Knowledge Base
- Manage your Account

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

© 2012 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved
Privacy Policy

Provide Website Feedback

This list is temporary. The list will not be viewable on another computer and will be deleted within 30 days.

If your browser cookies are cleared, your temporary list will be lost. You can save this list and get all of the My by becoming a registered user of the TE web site.