

# DC SUBMINIATURE SWITCH

## DC subminiature switch

Sealed switch IP67 protection

- Models available for 120°C operating temperature
- Nominal currents from 10A at 250 V AC
- Various auxiliary actuators available (can also be retrofitted)
- Various application-specific contact materials
- Mechanical operating life min. 1,000,000 operations
- Various terminal types available



## Technical specifications

<b>Series</b>	<b>DC ❶</b>
<b>Contact configuration</b>	S.P.D.T., S.P.S.T. - N.O., S.P.S.T. - N.C.
<b>Contact gap</b>	< 3 mm (μ)
<b>Switching voltage (max.)</b>	250 VAC
<b>Switching current</b>	0.1 to 10 A AC (see table on page 24) depending on model
<b>Operating voltage</b>	200 to 340 cN without auxiliary actuator, depending on model
<b>Total travel</b>	Approx. 1.6 mm
<b>Mechanical life</b>	(see table on page 23)
<b>Electrical life</b>	(see table on page 23)
<b>Ambient temperature</b>	-40 to +85°C/120°C
<b>Model with leads</b>	-40 to +105°C
<b>Proof tracking index</b>	PTI175, PTI250 on request

## Materials

<b>Cover</b>	PBT (UL 94V-0), PET (UL 94V-0)
<b>Actuator</b>	POM UL 94 HB (T85), PBT UL 94 V-0 (T120)
<b>Base</b>	PET (UL 94V-0)
<b>Contacts</b>	AgNi/AuAgPt (Crosspoint)
<b>Terminals</b>	CuZn silver-plated
<b>Auxiliary actuator</b>	Stainless steel or Plastic
<b>Sealing gasket</b>	VMQ
<b>Leads</b>	Cu, PVC-sheathed
<b>Approvals</b>	depending on model

**Degree of protection** IP67  
**Switch interior**

## Circuitry ❸

<b>Operating temperature +85°C</b>	<b>Code</b>
S.P.S.T. - N.O.	E
S.P.S.T. - N.C.	F
S.P.D.T.	G
<b>Operating temperature 120°C (with leads 105°C)</b>	
S.P.S.T. - N.O.	A
S.P.S.T. - N.C.	B
S.P.D.T.	C

## Terminal type ❹

<b>Model</b>	<b>Code</b>
Solder terminal short*	A1
PCB terminal 1.3 x 0.5 mm, straight*	H1
PCB terminal 0.6 x 0.5 mm, straight*	K1
PCB terminal 0.6 x 0.5 mm RH side**	K8
PCB terminal 0.6 x 0.5 mm LH side**	K9
PCB terminal 0.6 x 0.5 mm RH side***	K6
PCB terminal 0.6 x 0.5 mm LH side***	K7
Q.C. terminal 2.8 x 0.5 mm, straight*	L1
Leads 0.5 mm <sup>2</sup> , routed downwards	B5
Leads 0.5 mm <sup>2</sup> , with leads	B3
Leads 0.5 mm <sup>2</sup> , on side opposite actuator	B4
Leads 0.75 mm <sup>2</sup> , routed downwards	C5
Leads 0.75 mm <sup>2</sup> , with leads	C3
Leads 0.75 mm <sup>2</sup> , on side opposite actuator	C4
Without leads (Form B), on side opposite actuator/ on actuator side*	N3/N4
Without leads (Form A), on side opposite actuator/ on actuator side*	P3/P4
Without leads (no cut-out), with solder terminal*	Q5

\* Max. 30° twisted \*\* with location pin \*\*\* W/o location pin

## Electrical rating and operating life ❷

Electrical rating according to		Electrical life at rated load (operations)		Mechanical life	Operating force	Housing mark	Code
EN 61058-1	UL 1054	acc. to EN	acc. to UL		max. (cN)		
6 A 250 VAC	5 A 125-250 VAC	10,000	6,000	1 x 10 <sup>6</sup>	200	DC 1	1
10 (1.5) A, 250 VAC	10.1 A, 125-250 VAC 1/4 HP, 125 VAC	10,000	6,000	1 x 10 <sup>6</sup>	340	DC 2	2
0.1 A, 250 VAC	0.1 A 125-250 VAC	50,000	100,000	1 x 10 <sup>6</sup>	200	DC 3	3
3 A, 250 VAC	3 A, 125-250 VAC	50,000	6,000	1 x 10 <sup>6</sup>	200	DC 4*	4*

\* only possible as line version with line diameter 0.5 mm<sup>2</sup> and AWG 22

## Auxiliary actuator ❺

Model	Length	Code
Without lever	-	AA
Straight	4.8	LB
	8	LC
	42	LD
Roller	2.5	RB
	4.7	RC
	39.7	RD
Simulated roller	2.5	SB
	4.7	SC
	39.7	SD
Plastic, straight	7	WB
	14	WC
Plastic roller	5.2	ZB
Plastic simulated roller	5.6	VB

Generation of order code (example)  
 The order code consists of 5 parameters:

❶	❷	❸	❹	❺
Series	Electrical rating	Circuitry	Terminal type	Auxiliary actuator
DC = subminiature switch	1 = 6 A, 250 VAC	C = S.P.D.T.	A1 = Solder terminal short	LB = Lever straight, 4.8

- Not every configurable variant is available for order. Please contact us.
- The final two digits of article numbers on commercial documents refer to the index of the respective drawing.
- Customer-specific models are marked with a G or W as the sixth digit of the article number.



# DC SUBMINIATURE SWITCH CONTINUED

## Switching parameters


Model	Type	Max. operating force (cN)	Max. pretravel (mm)	Min. overtravel (mm)	Differential travel max. (mm)	Max. rest position (mm)	Operating point (mm)	Length actuator
Without auxiliary actuator	DC1, 3, 4	200	1.0	0.6	0.1	9.3	8.4 ± 0.3	-
	DC2	340	1.0	0.6	0.1	9.3	8.4 ± 0.3	

## Electrical rating at DC voltage


Please see our technical specification for DC currents (TS-0002) which is available upon request.

### Terminals


Solder terminal short max. 30° twisted



Q.C. terminal 2.8 x 0.5 mm max. 30° twisted




PCB terminal 1.3 x 0.5 mm max. 30° twisted




PCB terminal 0.6 x 0.5 mm max. 30° twisted




PCB terminal 0.6 x 0.5 mm RH side w/o location pin




PCB terminal 0.6 x 0.5 mm RH side with location pin




PCB terminal 0.6 x 0.5 mm LH side w/o location pins




PCB terminal 0.6 x 0.5 mm LH side w/o location pins



Side definition with terminals and location pins




Drilling pattern for PCB terminal 1.3 x 0.5 mm





Dimensions in mm

Drilling pattern for PCB terminal 0.6 x 0.5 mm, straight/lateral




Drilling pattern for PCB terminal 0.6 x 0.5 mm, lateral with location pins

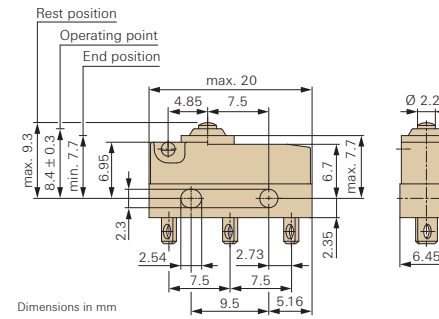


Dimensions in mm

## Auxiliary actuator

Steel auxiliary actuator

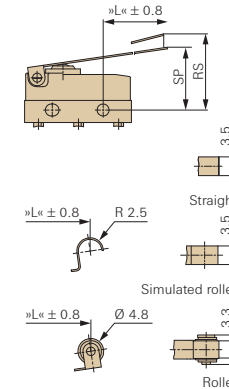

Plastic auxiliary actuator with/without adjusting screw

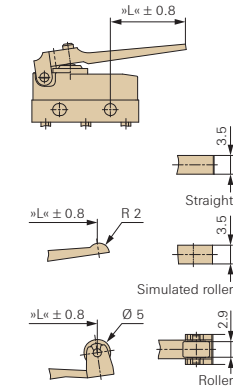

## Model with connecting leads (IP67)

