




## CENTRONIC PCB MOUNT

- PBT insulator
- Tin Plated Shell
- Female w/ Bail Lock

**Male** 57-10(XX)0PCB

**Female** 57-20(XX)0PCB

XX= Pins: 14, 24, 36, 50.

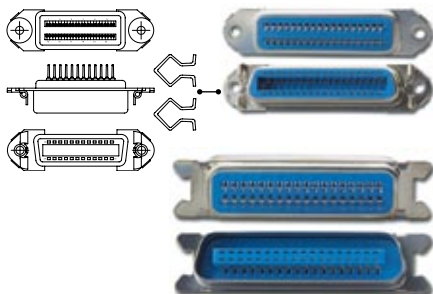

57-20360PCB-D 36/F PCB W/4-40 screw

57-10360PCB

## STRAIGHT EDGE

- N-Stand for Straight Edge

**Male** 57-10(XX)0PCB-N

XX= Pins: 14, 24, 36, 50.

**Female** 57-20(XX)0PCB-N

XX= Pins: 14, 24, 50.

## RIGHT ANGLE

- Female w/ Bail Lock
- Gold Plated Contacts
- Blue Plastic Fillings

**Male** 57-(XX)PR

XX= Pins: 14, 36, 50.

**Female** 57-(XX)SR

XX= Pins: 14, 24, 36, 50.



57-10360PCB-N

57-50SR

## TELCO & CEN 36 RIGHT ANGLE SOLDER

- Metal or Plastic Shell
- 50 Pin, Gold Plated Contacts
- Right Angle Cable Entry
- Screw Strain Relief

**Male** 57F-50MR-TLCO

**Female** 57F-50FR-TLCO

## Solder Type

**Male** 55-36M

**Female** 55-36F

**Metal Hood** 55-50M/T


55-50F/T

**Reversed** 55-50M/T-RV

55-50F/T-RV



DC-TELCO-BRK



55-50M/T

## IEEE-488 CONNECTOR

- Connector Kit for IEEE-488 Cable

13E-488



## HIGH DENSITY, SOLDER TYPE

- All Tin Plated Shells
- All Plugs with Grounding Indents On Shells
- Gold Plated Contacts
- White Plastic Fillings

**Male**

**Female**

DHS-15P

DHS-15S

DHS-26P

DHS-26S

DHS-44P

DHS-44S

DHS-62P

DHS-62S

DHS-78P

DHS-78S



DHS-15S



See Pg 108-110 for Hood Used on the Connector

## SOLDER TYPE

- Nickel Plated Steel Shell
- Female w/ Bail Locks
- Gold Plated Contacts
- Panel Mount style on male only

**Male**

**Female**

57-10140

57-40140

57-10240

57-40240

57-10360

57-40360

57-10500

57-40500



57-10500



57-40500

## SOLDER TYPE WITH METAL HOOD (180°)

- Nickel Plated Steel Hood
- Gold Plated Contacts
- Blue Plastic Fillings
- Rubber Tube Strain Relief Includ

**Male**

**Female**

57-30140

57-60140

57-30240

57-60360

57-30360

57-60500

57-30500



57-30360