

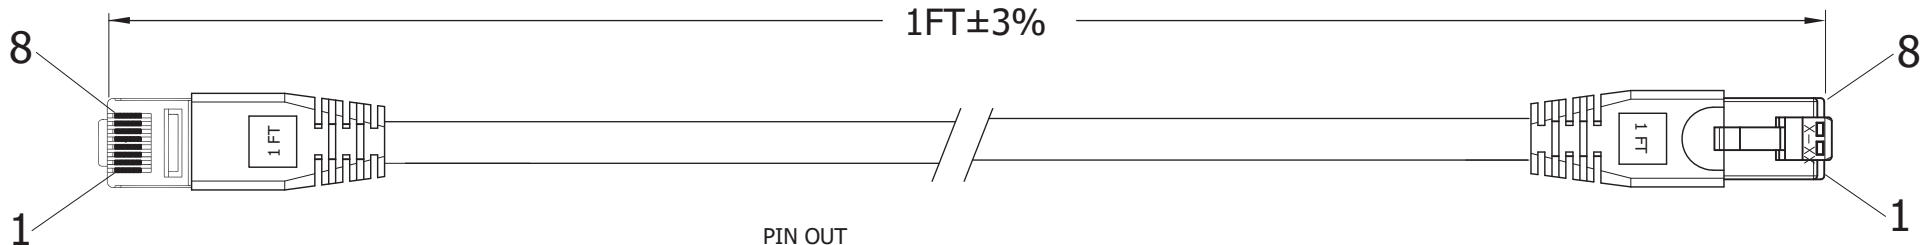


# P2

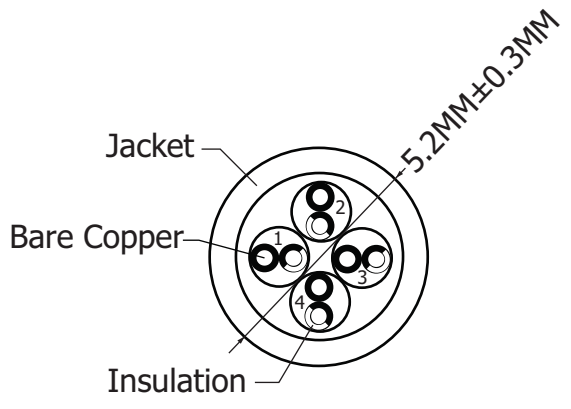


# P1

PIN OUT			
P1	568B Color	P2	
1	White/Orange	1	
2	Orange	2	
3	White/Green	3	
4	Blue	4	
5	White/Blue	5	
6	Green	6	
7	White/Brown	7	
8	Brown	8	

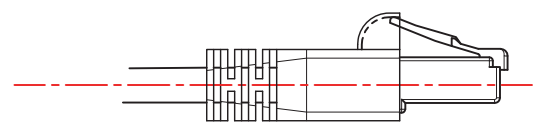

1	2	3	4
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN

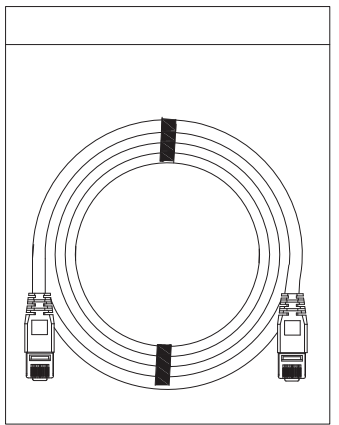

300 cables per carton

### Material:

- 4X2, 24AWG, twisted pair, 7\*0.19±0.15MM  
- OD: 5.2MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50µ"
- 568B Color wire standard
- Molded snaglass boot with strain relief
- Spot length on boot
- Connection 1:1



Scale	1:1						Name	Item No. <b>DK-1511-001/B</b>
TOLERANCE							Chappell	
X.X	±0.40				Drawn	12.13.11		
X.XX	±0.25				Approved			
X.XXX	±0.15							Title Cat 5e Patch Cord - Unshielded, Booted, UTP, 24AWG, Contact Plating 50µ" of Gold, Blue, 1 Foot
Angle	±3°							Drawing No.
								rev00
								Replace
								Sheet
					Modification	Date	Name	

