

RoHS Compliant

Specifications

Electrical Ratings	See Contact Options
Electrical Life	100,000 cycles typical
Contact Resistance	<50mΩ initial @ 2-4VDC, 100mA
Dielectric Strength	2000Vrms min
Insulation Resistance	>100MΩ min

Operating Force	2 Pole: 350 ± 100gF
	4 Pole: 450 ± 100gF
	6 Pole: 550 ± 100gF
	8~10 Pole: 650 ± 150gF
Operating Temperature	-20°C to 70°C
Storage Temperature	-40°C to 85°C

Materials

Actuator	POM
Housing	PC
Terminal Base	Phenolic
Contacts	Phosphor Bronze, Silver or Gold-Nickel Plated
Terminals	Brass, Silver or Gold-Nickel Plated
Chassis	Steel
Spring	Steel
Latching Pin	Steel


Ordering Information

1. Series	DL	4	N	F	B	Q	C13_
DL							
2. Number of Poles							
2 = DPDT							
4 = 4PDT							
6 = 6PDT							
8 = 8PDT							
10 = 10PDT							
**Stacking switch part numbers are:							
DL2LAQ/4LAQ							
DL2LAQ/6LAQ							
3. Actuation Force Options							
None = Standard Force							
4. Switch Function							
N = Non-latching							
L = Latching							
5. Terminal Options							
A, F, E, C, G							
6. Mounting Options							
Blank = No Chassis (standard)							
B = Mounting Chassis, single stage, 3.2mm dia mounting holes							
C = Mounting Chassis, single stage, M3x0.5 threaded mounting holes							
**Multi-Stage switch assembly part numbers assigned at factory							
7. Contact Material							
Q = Silver							
R = Gold							
6. Caps				Cap Colors			
Blank = No Cap	C14	C19					
C11	C15	C20	**See Cap Options for color availability				
C12	C16	C22					
C13	C18	C26					

DL


Horizontal Pushbutton

Dimensions


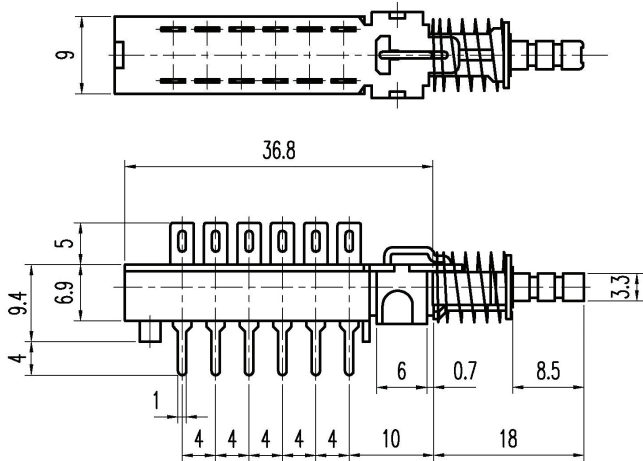


PC Layout


Number of Poles	"L" mm	"P" mm	"A" mm
2	24.8	6	8
4	36.8	12	16
6	48.8	18	24
8	60.8	24	32
10	72.8	30	40

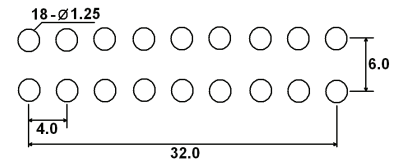


Terminal Options and Actuator Detail

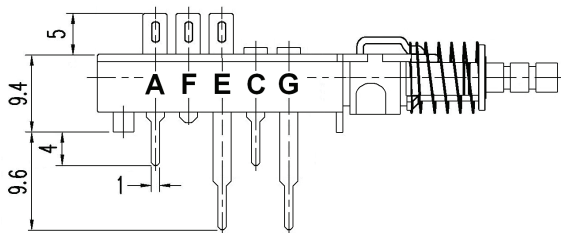

Mounting Options


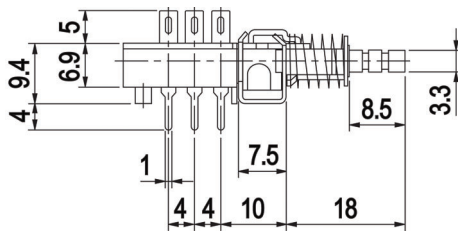


B = 3.2mm mounting holes

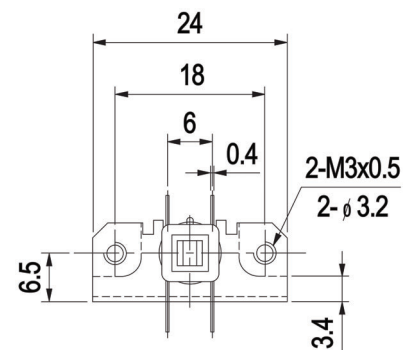

C = M3x0.5 mounting holes


Stacking Switches

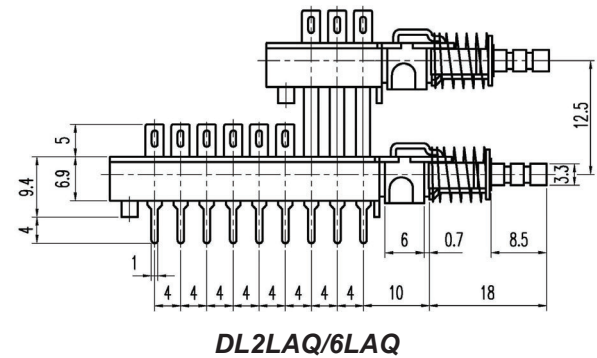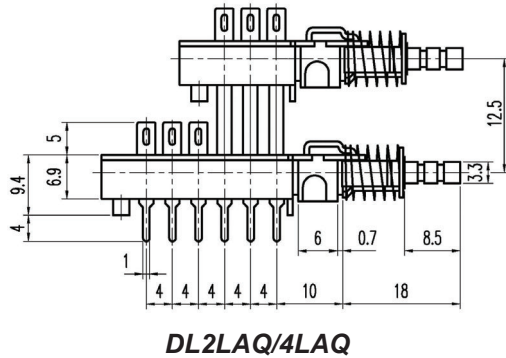

Contact Options


Designator	Contact Material	Terminal Material	Electrical Ratings
Q	Silver Plating	Silver Plating	500mA @ 120VAC, 1A @ 28VDC
R	Gold over Nickel Plating	Gold over Nickel Plating	0.4VA max @ 20VAC or VDC max

Cap Options




C11_

1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors




C12_

1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

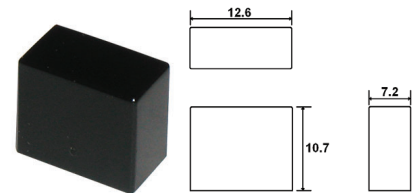


C13_

1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

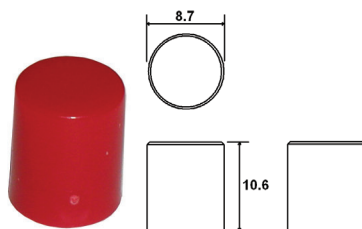


C14_

1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

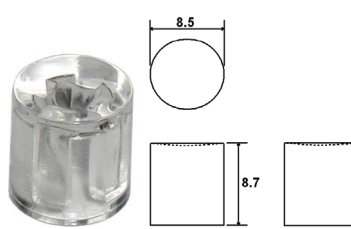


C15_

2 = Black, 0 = Clear
Contact Factory for other available colors

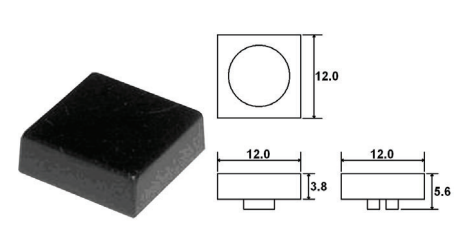


C16_

1 = White, 2 = Black, 3 = Red, 7 = Blue
Contact Factory for other available colors

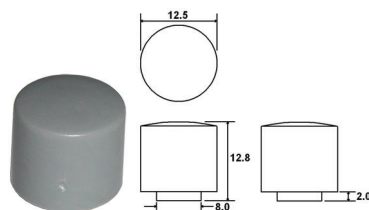

C18_

1 = White, 2 = Black, 9 = Light Gray
Contact Factory for other available colors




C19_

1 = White, 2 = Black, 3 = Red, 8 = Dark Gray
Contact Factory for other available colors

DL


Horizontal Pushbutton

Cap Options

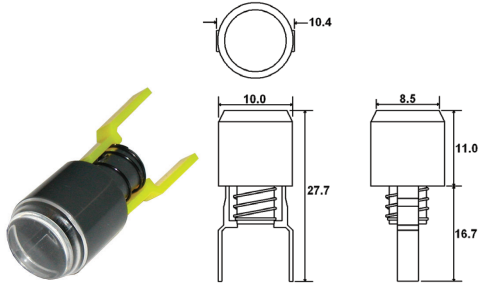


C20_ _

Housing Color : 2 = Black, 9 = Light Gray
 Indicator Color : 1 = White, 4 = Yellow, 5 = Green, 7 = Blue
 Contact Factory for other available colors



C22_ _

1 = White, 2 = Black, 8 = Dark Gray, 9 = Light Gray
 Contact Factory for other available colors


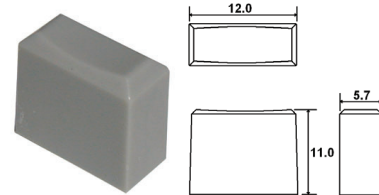


C26_ _

1 = White, 2 = Black, 3 = Red, 9 = Light Gray
 Contact Factory for other available colors

Multi-Stage Chassis

Part Numbers assigned at the factory

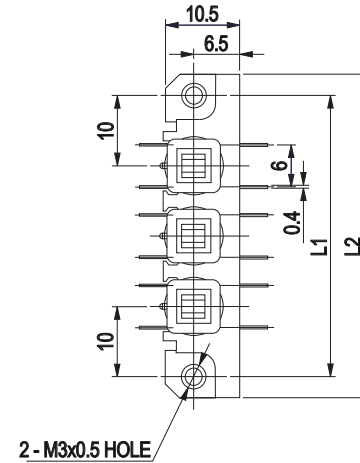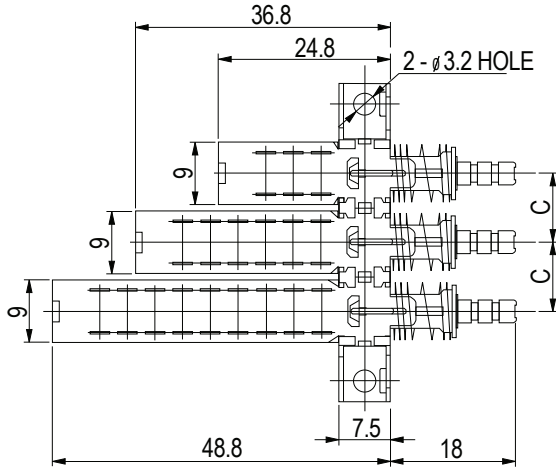

Bracket Length & Mounting Pitch

Pitch (C)	Number of Positions											
	1		2		3		4		5		6	
	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2
10mm	18	24	30	36	40	46	50	56	60	66	70	76
12.5mm			32.5	38.5	45	51	57.5	63.5	70	76	82.5	88.5
15mm			35	41	50	56	65	71	80	86	95	101
17.5mm			37.5	43.5	55	61	72.5	78.5	90	96	107.5	113.5
20mm			40	46	60	66	80	86	100	106	120	126
25mm			45	51	70	76	95	101	120	126	145	151
30mm			50	56	80	86	110	116	140	146	170	176