Note: This datasheet may be out of date.

Please download the latest datasheet of DLM0QSB350HY2# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=DLM0QSB350HY2%23

"#" indicates a package specification code.

DLM0QSB350HY2D








< List of part numbers with package codes > DLM0QSB350HY2D DLM0QSB350HY2B



Appearance & Shape

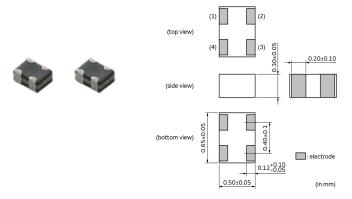



Packaging Information

Packaging	Specifications	Standard
		Packing
		Quantity
D	180mm Paper Tape	15000
В	Bulk(Bag)	500



Features

1. Small size and tight dimensional tolerance

Size: 0.65x0.50x0.30mm Tolerance: +-0.05mm

- 2. Suitable common mode impedance of 35 or 12ohm(at 100MHz) for high speed signal lines.
- 3. Prevents signal damaging in high speed differential lines.
- 4. Designed to match line impedance.



Applications

Limited Usage	For differential signal interface line
Other Usage	For general

1 of 3

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



DLM0QSB350HY2D

DR IN ELECTRONICS

Note: This datasheet may be out of date.

Please download the latest datasheet of DLM0QSB350HY2# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=DLM0QSB350HY2%23

"#" indicates a package specification code.



Specifications

Shape	SMD
Size Code (in mm)	0605
Size Code (in inch)	025020
Length	0.65mm
Length Tolerance	±0.05mm
Width	0.5mm
Width Tolerance	±0.05mm
Thickness	0.3mm
Thickness Tolerance	±0.05mm
Common Mode Impedance (at 100MHz)	35Ω
Common Mode Impedance (at 100MHz) Tolerance	±30%
Rated Current	120mA
Derating of Rated Current	No
Rated Voltage	5Vdc
Withstanding Voltage	12.5Vdc
DC Resistance(max.)	2.875Ω
DC Resistance	2.3Ω±25%
Insulation Resistance(min.)	10ΜΩ
Cut-off Frequency	8.0GHz (Typ.)
Operating Temperature Range	-40°C to 85°C
Mass(typ.)	0.3mg
Number of Circuit	1
Operating Temperature Range(Self-temperature rise is included)	No

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




Note: This datasheet may be out of date. Please download the latest datasheet of DLM0QSB350HY2# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en/products/productdetail?partno=DLM0QSB350HY2%23

"#" indicates a package specification code.

DLM0QSB350HY2D




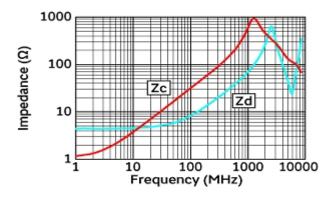


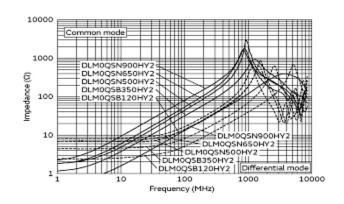

Impedance-Frequency Characteristics



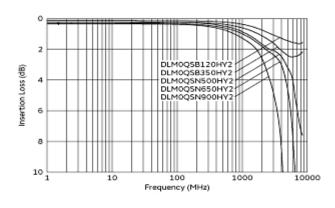

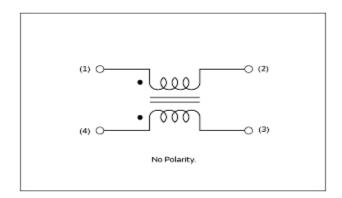

Differential Mode Transmission Characteristics (Typical Value)

Equivalent Circuit

3 of 3

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

