



METAL HOODS W/ GROMMETS

- Includes Necessary Hardware for Assembly
- Rubber Grommets with various inside diameters for Strain Relief
- Packaged w/ 3 to 5 Grommets for each Hood
- Die Cast Metal Hood
- Provides EMI Shielding

Straight

DM-(XX)C/GR

XX= Pins: 9, 15, 25, 37, 50.



DM-50C/GR

GROMMETS FOR METAL HOODS

- Flexible, Rubber Material
- Each Set with Different Inside Diameter



Part #	Use On	O.D. (MM)	I.D. (mm)				
			1	2	3	4	5
DM-GR-9, 15	DM-9 or 15C/GR	10	5	6	7	8	9
DM-GR-25	DM-25C/GR	12	6	7	8	9	10
DM-GR-37, 50	DM-37 or 50C/GR	16	8.5	10	11.5	13	14.5

HARDWARE FOR HOODS

H-SET-25C

Includes one set cord strain reliever wire holder, Saddle Washer, Shoulder Screw, 12mm 4/40 screw, 7.5mm 4/40 screw and nut. For DP25C



H-SET-25C/S

Includes two each Saddle Washer, Shoulder screw, 12mm 4/40 screw, nut, and one plastic strain relief screw. For DP-25C/S



FOR AUI CABLE

HSL-15 Slide Latch

HSL-P Slide Lock Post Kit, Include 2 each Locking Post and 2 flat washers, 2 split washer



METAL HOODS WITH GROMMETS

- Includes Necessary Hardware for Assembly
- Rubber Grommets with Various Inside Diameters for Strain Relief
- Packaged with 3 to 5 Grommets for Each Hood
- Die Cast Metal Hood
- Provides EMI Shielding

Right Angle

DM-(XX)CR/GR

XX= Pins: 9, 15, 25.



DM-15CR/GR

DUST COVER FOR D-SUB

- Flexible Translucent Plastic
- Protects Connector from Dust and/or Moisture

Male DST-D(XX)P

Female DST-D(XX)S

XX= Pins: 9, 15, 25, 37.



DST-D09P



DST-D09S

DUST COVERS FOR CENTRONIC

- Flexible Translucent Plastic
- Protects Connector from Dust and/or Moisture

Male DST-57(XX)P

Female DST-57(XX)S

XX= Pins: 14, 36, 50.



DST-5736P



DST-5714S

SCREW LOCK KIT


HFS-1 Include 1 short 4/40 Hex Locking Screw thread length 7.5mm, and 2 Flat washer, 1 split washer, and 1 nut.

HFS-1/SET Include 2 short 4/40 Hex Locking Screw thread length 7.5mm, and 4 Flat washer, 2 split washer, and 2 nut.

HFS-2 Include 1 Hex Locking Screw thread length 12 mm, and 2 Flat washer, 1 split washer, and 1 nut.

HFS-2/SET Include two 4/40 Hex Locking Screw thread length 12 mm, and 4 Flat washer, 2 split washer, and 2 nut.

HFS-3/SET Include 2 each Hex Locking Screw thread length 7.5mm, 4 Flat washer, 2 split washer, and 2 nut.

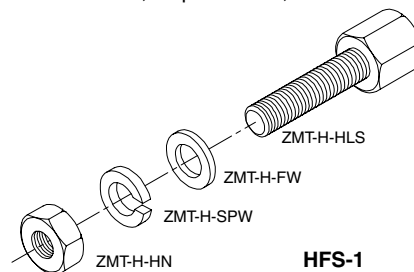

HFS-1