POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX
2	24VAC 50/60Hz	25	35	#10-32 COMBINATION SCREWS 4 Quick Connect Power Termination	YES	YES

COIL DATA

COIL 24VAC 50/60Hz
18 OHM 18 VAC OPERATE
3.8-16.3 VAC DROPOUT
32 VA INRUSH 5.6 VA SEAL
MAX VOLTAGE 26.4 VAC

NOTES: UNLESS OTHERWISE SPECIFIED

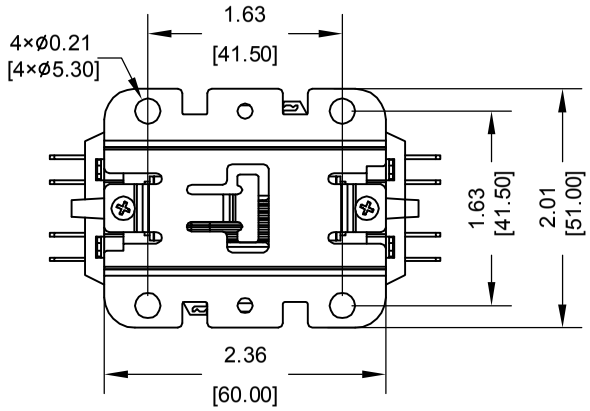

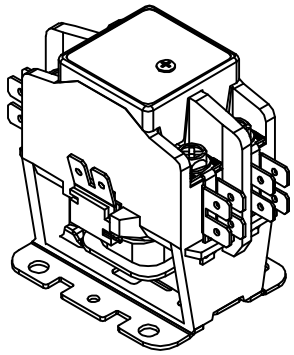

Product Label

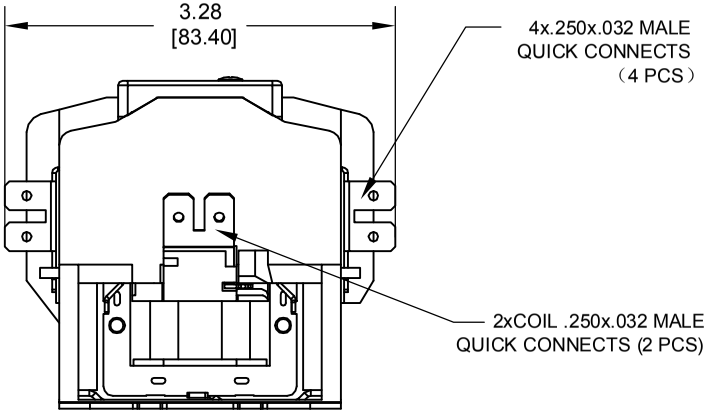



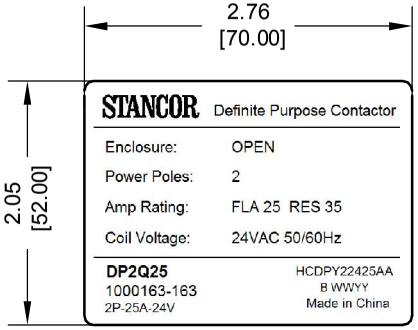

Individual Box Label

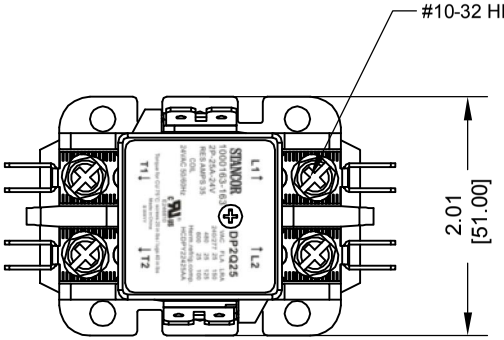



Master Carton Label

TOLERANCE	
INCHES [mm]	
X	±0.06 [1.50]
X.X	±0.02 [.50]
X.XX	±0.006 [.150]
X.XXX	±0.002 [.050]
ANGLES	±1°

THIRD ANGLE PROJECTION

REV.	DESCRIPTION	ECN	DWN	APVD	APVD DATE

STANCOR
www.stancor.com
2425 South 21st Street
Phoenix，AZ 85034
(602)275-3800

DRAWN BY	DRAWN DATE	CHECKED BY	CHECKED DATE

DESC. 2P-25A-24V

PAGE 1 OF 1

PART NO. DP2Q25