

DRR-129 Features and Benefits



Features

- Normally open switch size with 50.80mm x 5.25mm (2.0" x 0.207") glass envelope
- Capable of switching up to 400Vdc
- Maximum switched current 3 Amps, will carry up to 6 Amps
- Maximum contact rating 100 Watts
- Minimum voltage breakdown 600Vdc
- 10¹⁰ Ohms insulation resistance
- Available sensitivity range 42-83 AT


Benefits

- Hermetically sealed switch contacts are not effected by and have no effect on their external environment
- Capable of switching European mains voltage
- Low, stable contact resistance
- Low space requirement
- Zero operating power required for contact closure
- Fit and forget durability

Applications

- Security
- Limit switching
- Automotive applications
- Industrial safety applications

DIMENSIONS (in) mm

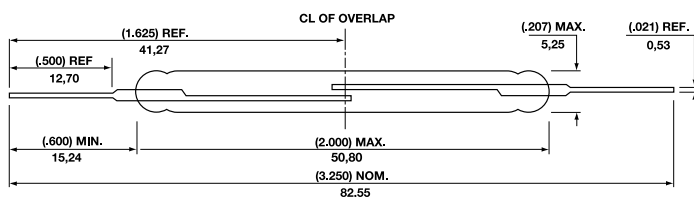

| | | |
|--|--|---------|
| Switch Type | | DRR-129 |
| Contact Form | | A |
| Underwriters Laboratories Recognised, File E47258 (see note 1) | | |

ELECTRICAL RATINGS

| | | | |
|--------------------|------------------|-------------|------------------|
| Contact Rating (2) | | Watt - max. | 100 |
| Voltage | Switching | Vdc - max. | 400 |
| | Breakdown | Vdc - min. | 600 |
| Current | Switching | A - max. | 3.0 |
| | Carry | A - max. | 6.0 |
| Resistance | Contact, Initial | Ω - max. | 0.100 |
| | Insulation | Ω - min. | 10 ¹⁰ |
| Capacitance | Contact | pF - typ. | 0.6 |
| Temperature | Operating | °C | -40 to +125 |
| | Storage (6) | °C | -65 to +125 |

OPERATING CHARACTERISTICS

| | | | |
|--------------------|------------------|-----------|-----|
| Operate Time (3) | | ms - max. | 4.5 |
| Release Time (3) | | ms - max. | 2.5 |
| Shock | 11ms ½ sine wave | G - max. | 100 |
| Vibration | 50-2000 Hertz | G - max. | 30 |
| Resonant Frequency | | Hz - typ. | 850 |

MAGNETIC CHARACTERISTICS

| | | | |
|------------------------|--|--------------|-------|
| Pull-In Range (4) | | Ampere Turns | 42-83 |
| Rating Sensitivity (5) | | Ampere Turns | 60 |
| Test Coil | | | L4988 |

- Notes
- 1) For details on electrical specifications, contact Hamlin.
 - 2) Contact rating-Product of the switching voltage and current should never exceed the wattage rating. Contact Hamlin for additional load/life information.
 - 3) Operate/Release Time-per EIA/NARM RS421A, diode suppressed coil.
 - 4) Pull in Range-Contact Hamlin for tolerances available within this range.
 - 5) Rating Sensitivity-The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
 - 6) Storage Temperature-Long time exposure at elevated temperature may degrade solderability of the leads.

USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales@hamlin.com
UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: uksales@breedtech.com
Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: hamlin-electronics.de@breedtech.com
France Tel: +33 1 46 87 02 02 • Fax: +33 1 46 86 67 86 • Email: hamectrol@hamectrol.fr