

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1210360356](#)  
**Status:** **Active**  
**Overview:** mPm DIN Valve Connectors  
**Description:** Micro-Change (M12) to Brad mPm DIN Form A - 18mm Cordset, 5 Poles, Male (Straight) to Male (90°), 1.50m (9.84') Length, 24V

**Documents:**

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                    |  |
|--------------------|--|
| Product Family     | Industrial Cordsets                      |
| Series             | <a href="#">121036</a>                   |
| Connector End A    | Brad mPm DIN A - 18mm                    |
| Connector End B    | Micro-Change (M12)                       |
| IP Rating          | IP65                                     |
| Material - Contact | Copper Alloy                             |
| Overview           | <a href="#">mPm DIN Valve Connectors</a> |
| Product Name       | Micro-Change (M12), mPm                  |
| Protocol           | N/A                                      |
| Region             | America, Europe                          |
| Type               | Double Ended                             |
| UPC                | 883906334857                             |

**Physical**

|                               |                     |
|-------------------------------|---------------------|
| Cable Diameter                | 5.72mm (.225")      |
| Cable Length                  | 3.0m (9.84')        |
| Color - Cable Jacket          | Black               |
| Coupling Style                | Threaded            |
| Gender                        | Male-Male           |
| Keyway                        | Single              |
| LED Indicator                 | No                  |
| Material - Cable Jacket       | PUR                 |
| Material - Connector Body     | Polypropylene       |
| Material - Coupling Nut       | Nickel-plated Brass |
| Material - Plating Mating     | Gold over Nickel    |
| Orientation                   | 90° to Straight     |
| Poles                         | 5                   |
| Temperature Range - Operating | -25°C to +75°C      |
| Wire Size AWG                 | 22                  |
| Wire/Cable Type               | Shielded PUR        |

**Electrical**


|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 4.0A |
| Voltage - Maximum             | 24V  |

**Material Info**

|                    |               |
|--------------------|---------------|
| Engineering Number | E850B0P12M030 |
|--------------------|---------------|

**Reference - Drawing Numbers**

|               |               |
|---------------|---------------|
| Sales Drawing | SD-121036-001 |
|---------------|---------------|

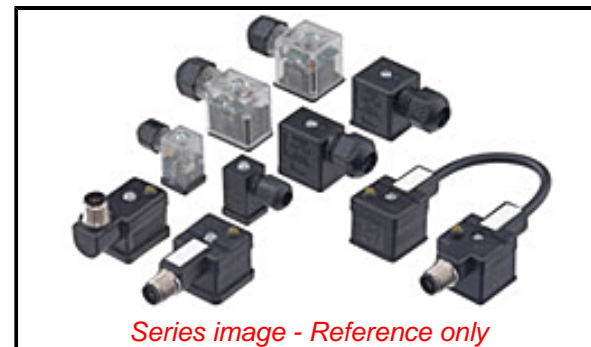

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

**China RoHS**

Not Reviewed

ELV

Not Relevant

RoHS Phthalates

Not Reviewed

**Search Parts in this Series**

[121036](#) Series