




HEAT SHRINK TUBING

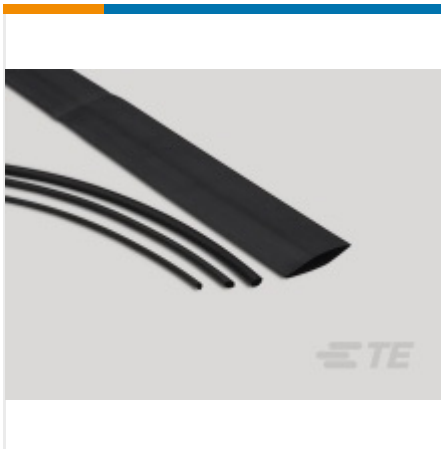

✓ Active

TE CONNECTIVITY (TE)

X4-2.0-0-SP

Raychem | SWFR X4

EJ1508-000

TE Internal Number: EJ1508-000

[EU RoHS Compliant](#)

[EU ELV Compliant](#)

Wall Type Single

Resistant To Mechanical Damage

Low Outgassing No

Product Source China

Packaging Method Spool

[↓ PRODUCT DRAWING](#)
English

DOCUMENTATION

Product Drawings

SWFR X4 SINGLE WALL HEAT SHRINKABLE TUBING

PDF

English

Catalog Pages/Data Sheets

1-1773894-4_SWFR_Tubing

PDF

English

Very-Thin-Wall, Highly Flame-Retardant, Zero Halogen, Metric-Sized Heat-Shrinkable Tubing

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Wall Type Single

Product Family X4

Electrical Characteristics

Voltage (Max) (kV) .3

Body Features

Shrink Ratio 2:1

Color Black

Flexibility Very Flexible

Material ZEROHAL Polyolefin

Fluid Type Water

Dimensions

Recovered Wall Thickness (Nominal) .26 mm [.01 in]

Expanded Inside Diameter (Min) 2.3 mm [.091 in]

Recovered Inside Diameter (Max) 1 mm [.039 in]

Usage Conditions

Resistant To Mechanical Damage

Recovery Temperature (°C) 90

Operating Temperature Range (°C) -30 – 125

Flammability Flame-Retardant

Shrink Temperature (Min) (°C) 70

Fluid Resistance Moisture/Spray Protection

Product Availability

Applicable Region Global

Packaging Features

Packaging Method Spool

Other

Low Outgassing No

Product Source China

Statement of Compliance

Statement of Compliance

PDF