



■ Features :

- Universal AC input / Full range
- High efficiency up to 90%
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 3"×2" compact size
- LED indicator for power on
- No load power consumption<0.3W
- 3 years warranty




SPECIFICATION

| MODEL | EPS-35-3.3 | EPS-35-5 | EPS-35-7.5 | EPS-35-12 | EPS-35-15 | EPS-35-24 | EPS-35-27 | EPS-35-36 | EPS-35-48 | |
|--------------------------------------|--|---|-------------|--------------|--------------|----------------|--------------|----------------|--------------|--------------|
| OUTPUT | DC VOLTAGE | 3.3V | 5V | 7.5V | 12V | 15V | 24V | 27V | 36V | 48V |
| | RATED CURRENT | 6A | 6A | 4.7A | 3A | 2.4A | 1.5A | 1.3A | 1A | 0.75A |
| | CURRENT RANGE | 0 ~ 6.6A | 0 ~ 6.6A | 0 ~ 5.2A | 0 ~ 3.3A | 0 ~ 2.65A | 0 ~ 1.65A | 0 ~ 1.45A | 0 ~ 1.1A | 0 ~ 0.82A |
| | RATED POWER | 19.8W | 30W | 35.25W | 36W | 36W | 36W | 35.1W | 36W | 36W |
| | PEAK LOAD(10sec.) <small>Note.6</small> | 21.78W | 33W | 39W | 39.6W | 39.75W | 39.6W | 39.15W | 39.6W | 39.36W |
| | RIPPLE & NOISE (max.) <small>Note.2</small> | 60mVp-p | 70mVp-p | 80mVp-p | 100mVp-p | 100mVp-p | 180mVp-p | 180mVp-p | 200mVp-p | 240mVp-p |
| | VOLTAGE ADJ. RANGE | 3.1 ~ 3.6V | 4.75 ~ 5.5V | 7.13 ~ 8.25V | 10.8 ~ 13.5V | 13.5 ~ 16.5V | 21.6 ~ 27V | 24.3 ~ 29.7V | 32.4 ~ 39.6V | 43.2 ~ 52.8V |
| | VOLTAGE TOLERANCE <small>Note.3</small> | ±2.5% | ±2.0% | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | LOAD REGULATION | ±1.5% | ±1.0% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | SETUP, RISE TIME | 1000ms, 30ms/230VAC 1000ms, 30ms/115VAC at full load | | | | | | | | |
| HOLD UP TIME (Typ.) | 50ms/230VAC 16ms/115VAC at full load | | | | | | | | | |
| INPUT | VOLTAGE RANGE <small>Note.5</small> | 85 ~ 264VAC | | 120 ~ 370VDC | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | |
| | EFFICIENCY (Typ.) | 80% | 82% | 84% | 87% | 88% | 89% | 89% | 89% | 90% |
| | AC CURRENT (Typ.) | 0.75A/115VAC | | 0.5A/230VAC | | | | | | |
| | INRUSH CURRENT (Typ.) | COLD START 40A/230VAC | | | | | | | | |
| | LEAKAGE CURRENT | <1mA/240VAC | | | | | | | | |
| PROTECTION | OVER LOAD | 115 ~ 170% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | |
| | OVER VOLTAGE | 3.7 ~ 4.6V | 5.6 ~ 6.75V | 8.63 ~ 10.5V | 14 ~ 17V | 17.25 ~ 20.25V | 27.6 ~ 32.4V | 31.05 ~ 36.45V | 39.7 ~ 46.8V | 53.3 ~ 64.8V |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +70°C (Refer to "Derating Curve") | | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | | | |
| SAFETY & EMC <small>(Note 4)</small> | SAFETY STANDARDS | UL60950-1, TUV EN60950-1 approved | | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | |
| | EMC EMISSION | Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3 | | | | | | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, heavy industry level, criteria A | | | | | | | | |
| OTHERS | MTBF | 649.1K hrs min. MIL-HDBK-217F (25°C) | | | | | | | | |
| | DIMENSION | 76.2*50.8*24mm (L*W*H) | | | | | | | | |
| | PACKING | 0.085Kg; 120pcs/11.2Kg/0.97CUFT | | | | | | | | |
| NOTE | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>5. Derating may be needed under low input voltage. Please check the static characteristics for more details.</p> <p>6. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.</p> <p>7. EPS-35-24/27/36/48 without HS1.</p> | | | | | | | | | |

■ Mechanical Specification

Unit:mm

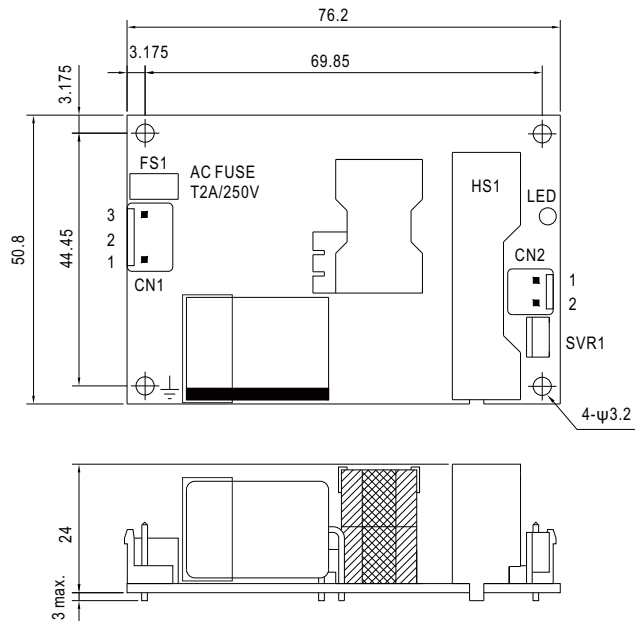

AC Input Connector (CN1) : JST B3P-VH or equivalent


| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|-----------------------|--------------------------------|
| 1 | AC/N | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2 | No Pin | | |
| 3 | AC/L | | |

DC Output Connector (CN2) : JST B2P-VH or equivalent


| Pin No. | Assignment | Mating Housing | Terminal |
|---------|------------|-----------------------|--------------------------------|
| 1 | -V | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2 | +V | | |

⚠ HS1(Note.7) must have safety isolation distance with system case.
 ⊥ : Grounding required

■ Block Diagram

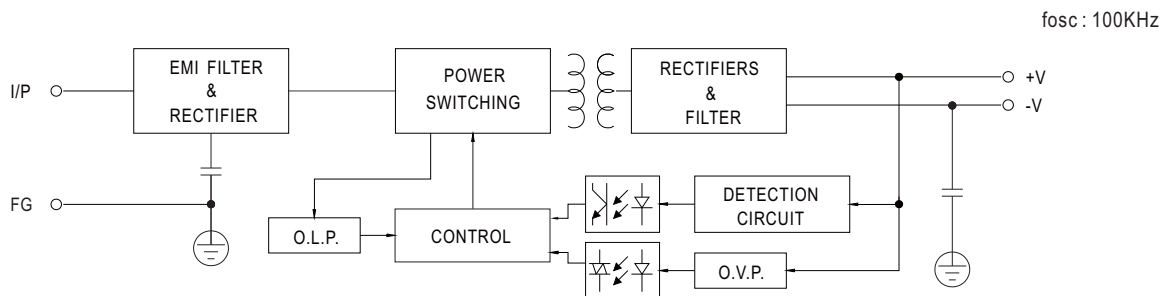

■ Output Derating

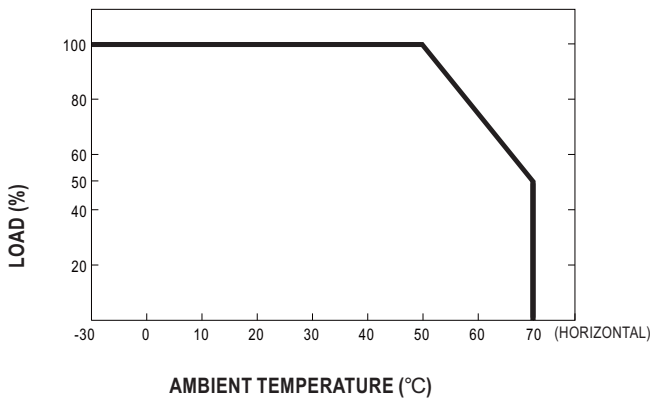

■ Static Characteristics

