


ES SERIES

RELAY SOCKETS

DESCRIPTION	14 Pin Miniature Sockets, DIN Rail Mountable, Finger Safe
ELECTRICAL RATING	<ul style="list-style-type: none"> • ES15/4 - 300 Volts, 7 Amps • ES15/4S - 300 Volts, 10 Amps
CONSTRUCTION	<p>Contacts • Brass, Nickel Plated</p> <p>Screws • M3 Steel, Nickel Plated</p> <p>Molding • Break Resistant Thermoplastic</p>
AGENCY APPROVALS	<ul style="list-style-type: none"> • UL recognized, File No. E113714 • CSA certified, File No. LR26716 (ES15/4) • CSA certified, File No. LR42742 (ES15/4S) • CE 

ORDERING CODE

PART NO.	DESCRIPTION	TERMINAL TYPE
ES15/4	4PDT, 14 Pin Miniature (Fig. 1)	Pressure Clamp Screws
ES15/4S	4PDT, 14 Pin Miniature (Fig. 2)	Box Lug

ACCESSORIES

PART NO.	DESCRIPTION (Refer to the accessories pages 25-27)
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-104-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-105-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-106-2PM	Prepunched Steel DIN Rail (2 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
MHO	Hold Down Spring
MS35	Hold Down Spring/Ejector (For ES15/4S only)

PLUG-IN INDICATOR AND PROTECTION MODULES

PART NO.	DESCRIPTION
Type 22	Diode for 6-230V DC (+Terminal A1)
Type 42V	Green LED with Diode for 6-24V DC (+ Terminal A1)
Type 42CV	Green LED with Diode for 110-230V DC (+ Terminal A1)
Type 52B	RC Circuit for 6-24V AC
Type 52C	RC Circuit for 110-240V AC
Type 62V	Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92V	Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 62CV	Varistor + Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92CV	Varistor + Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 102	Bypass Resistor 110-240V AC

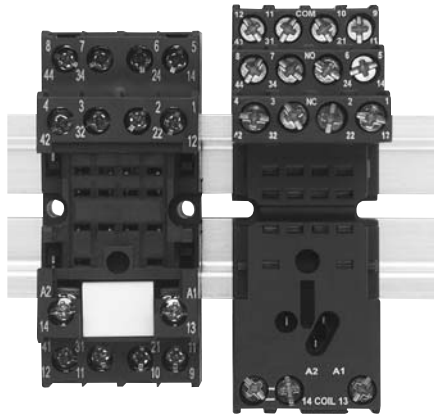


Fig. 1

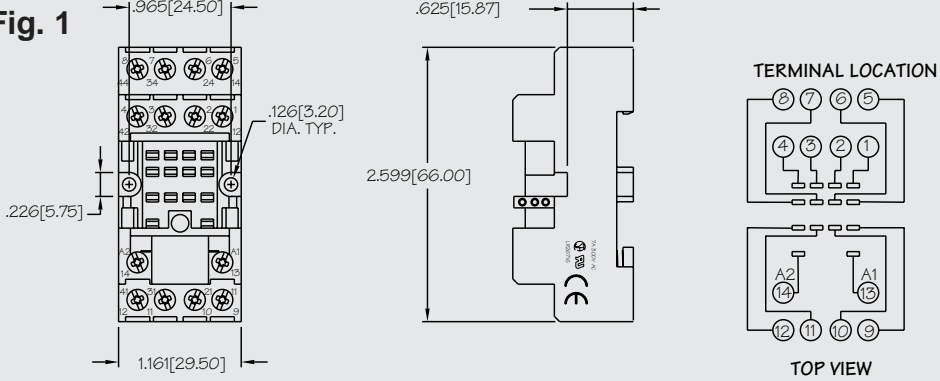


Fig. 2

