


ES SERIES

RELAY SOCKETS

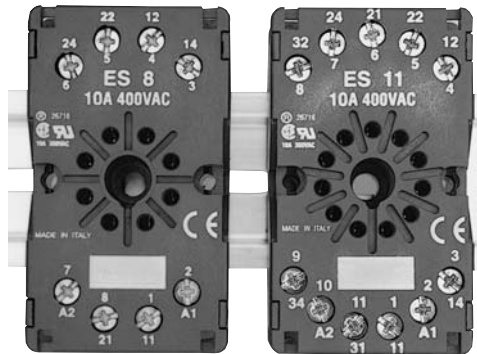

DESCRIPTION

8 and 11 Pin Octal Sockets, DIN Rail Mountable, Finger Safe

ELECTRICAL RATING

• 300 Volts, 10 Amps

CONSTRUCTION

- Contacts** • Brass, Nickel Plated
- Screws** • M3 Steel, Nickel Plated, Maximum Wire Gauge #14
- Molding** • Break Resistant Thermoplastic

AGENCY APPROVALS

- UL recognized, File No. E113714
- CSA certified, File No. LR26716
- CE



ORDERING CODE

PART NO.

ES8
ES11

DESCRIPTION

DPDT, 8 Pin Octal Style (Fig. 1)
3PDT, 11 Pin Octal Style (Fig. 2)

TERMINAL TYPE

Box Lug
Box Lug

ACCESSORIES

PART NO.



C-103-PM
C-104-PM
C-105-PM
C-106-2PM
C-108-PM
C-108-2PM
HDB-13
T

DESCRIPTION (Refer to the accessories pages 25-27)


Prepunched Aluminum DIN Rail (1 Meter Lengths)
Prepunched Steel DIN Rail (1 Meter Lengths)
Prepunched Steel DIN Rail (1 Meter Lengths)
Prepunched Steel DIN Rail (2 Meter Lengths)
Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
Hold Down Spring
Marking Plate



Fig. 1

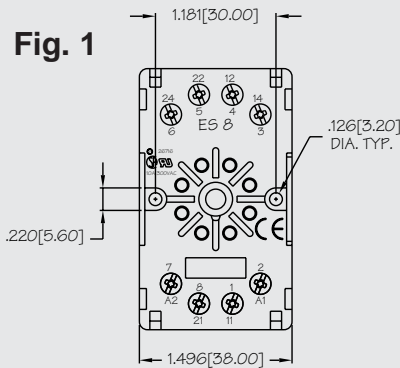

TERMINAL LOCATION



TOP VIEW







Fig. 2

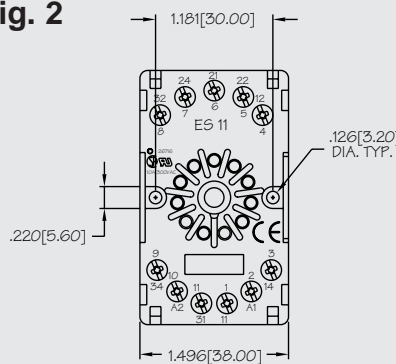

TERMINAL LOCATION



TOP VIEW

