


F464, Film, Metallized Polypropylene, General Purpose, 0.47 uF, 5%, 2500 VDC, 85°C, Lead Spacing = 37.5mm

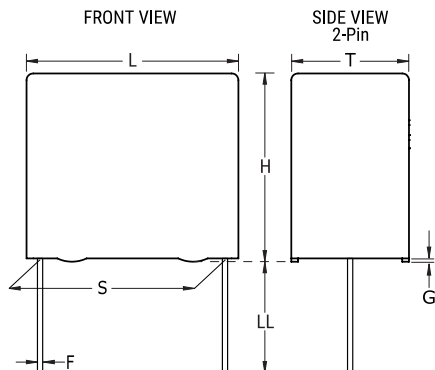

Dimensions

L	41mm -0.7mm
H	45mm -0.7mm
T	30mm -0.7mm
S	37.5mm +/-0.4mm
LL	17mm +0/-1mm
F	1mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications

Packaging:	Pizza, Box
Packaging Quantity:	77

General Information

Series:	F464
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	MKP, Pulse
RoHS:	Yes
Lead:	Wire Leads
AEC-Q200:	No
Component Weight:	62.7 g
Miscellaneous:	The Rated Voltage Decreases 2%/C Between +85C And +105C (1.25%/C For AC). ClimCat: 55/105/56.

Specifications

Capacitance:	0.47 uF
Capacitance Tolerance:	5%
Voltage AC:	900 VAC
Voltage DC:	2500 VDC, 1500 VDC (105C)
Temperature Range:	-55/+105°C
Rated Temperature:	85°C
Dissipation Factor:	0.05% 1kHz, 0.06% 10kHz
Insulation Resistance:	63.8298 GOhms
Max dV/dt:	900 V/us
Inductance:	6 nH