


AC BLOWER 220x220x56mm


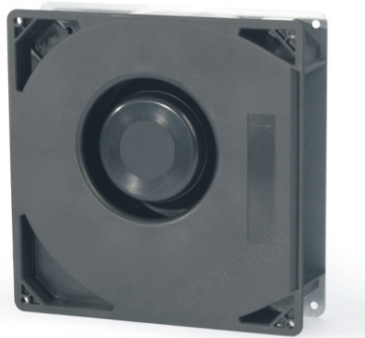


ES IP

Spiral Housing: Fiberglass-Reinforced Polycarbonate
 Housing Base: Galvanized Steel Plate
 Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 100MΩ, 500VDC/min between bare wire and frame
 Dielectric Strength: 1500VAC for one minute
 Operation Temperature: -20°C~70°C(Humidity 35%-85%RH)
 Storage Temperature: -40°C~85°C(Humidity 35%-85%RH)
 Motor Protection: Thermal Protected
 Weight: 1750 g

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBA2256B11W7C-51	115	50/60	103.0/117.0	33.8/47.8	64.0/66.0	2,900/3,300	340/420	37/45	B	①/②
FBA2256B22W7C-51	230	50/60	104.0/120.0	33.8/47.8	64.0/66.0	2,900/3,400	160/200	36/44	B	①/②

Specifications are subject to change without notice

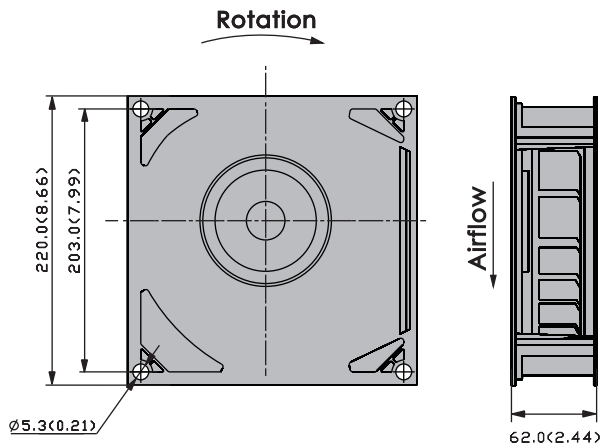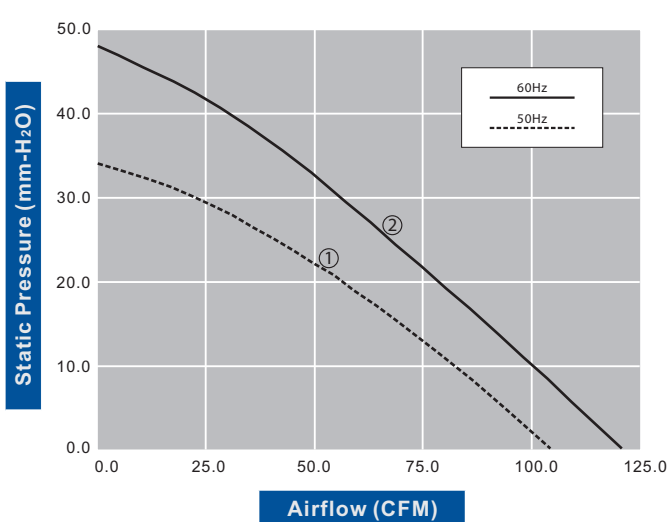

unit: mm(inch)