

DC BLOWER 97x94x33mm



Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max. 500VAC/min between bare wire and frame
 Operation Temperature: -10°C~70°C(Humidity 35%-85%RH)
 Storage Temperature: -40°C~70°C(Humidity 35%-85%RH)
 Lead Wire: UL Type #24 AWG
 Weight: 165 g



SS



IP

SF

Model Number	Voltage (VDC)	Op. Voltage (VDC)	AirFlow (CFM)	Static Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Additional Function (See Page 3)	Curves
FBD9733B12W3-61	★ 12	6.0~13.8	14.20	7.70	39.40	2,200	210	2.52	B,S	P,M,U,X,Y	①
FBD9733B12W5-61	★ 12	6.0~13.8	18.70	13.70	44.30	2,800	420	5.04	B,S	P,M,U,X,Y	②
FBD9733B12W7-61	★ 12	6.0~13.8	22.20	21.10	49.30	3,300	750	9.00	B,S	P,M,U,X,Y	③
FBD9733B24W3-61	★ 24	12.0~27.6	14.20	7.70	39.40	2,200	120	2.88	B,S	P,M,U,X,Y	①
FBD9733B24W5-61	★ 24	12.0~27.6	18.70	13.70	44.30	2,800	200	4.80	B,S	P,M,U,X,Y	②
FBD9733B24W7-61	★ 24	12.0~27.6	22.20	21.10	49.30	3,300	380	9.12	B,S	P,M,U,X,Y	③
FBD9733B48W3-61	★ 48	24.0~55.2	14.20	7.70	39.40	2,200	140	6.72	B,S	P,M,U,X,Y	①
FBD9733B48W5-61	★ 48	24.0~55.2	18.70	13.70	44.30	2,800	180	8.64	B,S	P,M,U,X,Y	②
FBD9733B48W7-61	★ 48	24.0~55.2	22.20	21.10	49.30	3,300	270	12.96	B,S	P,M,U,X,Y	③

- For "Sleeve" bearing version, change the "B" in the model number to, "S".
- If model depicts "★", auto restart protection function built in.

Specifications are subject to change without notice

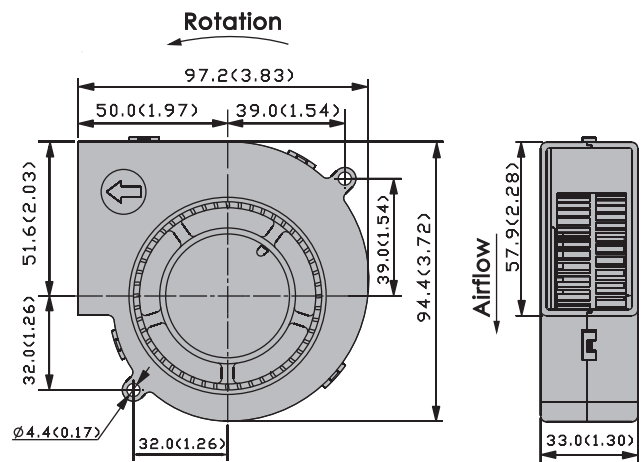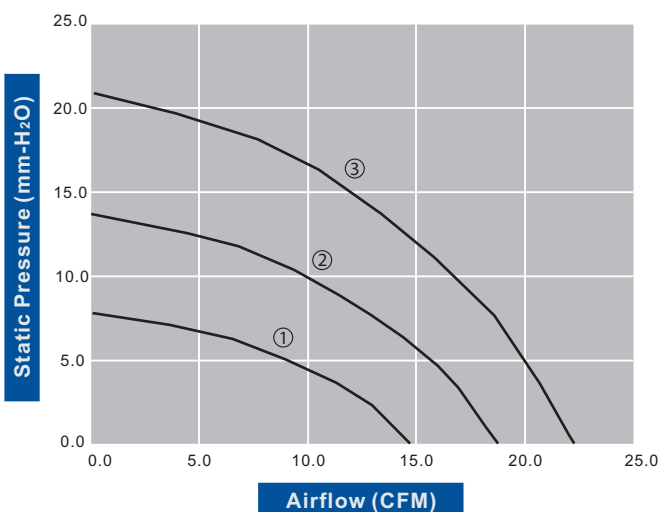

unit: mm(inch)