

Interface module - FLKM HDSUB-78/M - 5600436

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-Subminiature male connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 78, width: 169 mm

Key commercial data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 450.0 GRM |
| Custom tariff number | 85369010 |
| Country of origin | United States |

Technical data

Note

| | |
|-------------------|--|
| Trade restriction | The products are offered exclusively for export outside the EU and the European Economic Area. |
|-------------------|--|

Dimensions

| | |
|--------|--------|
| Width | 169 mm |
| Height | 77 mm |
| Depth | 72 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

| | |
|------------------------------------|-------|
| Max. permissible operating voltage | 125 V |
| Max. perm. current (per branch) | 1 A |
| Number of positions | 78 |
| Mounting position | any |

Connection data for connection 1

| | |
|----------------------------------|----------------|
| Connection name | PCB connection |
| Connection in acc. with standard | IEC / EN |

Interface module - FLKM HDSUB-78/M - 5600436

Technical data

Connection data for connection 1

| | |
|--|---------------------|
| Connection method | Screw connection |
| Number of positions | 78 |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |

Connection data for connection 2

| | |
|---------------------|------------------|
| Connection name | D-SUB connection |
| Connection method | D-SUB pin strip |
| Number of positions | 78 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001434 |
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |


UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 39121421 |

Interface module - FLKM HDSUB-78/M - 5600436

Drawings

Circuit diagram

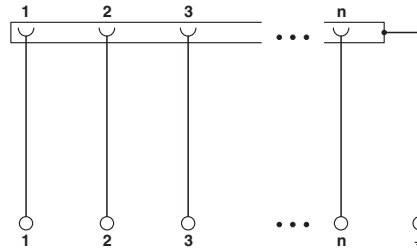

Universal circuit diagram

Interface module - FLKM HDSUB-78/M - 5600436

Product drawing

