


KEMET, FLLD3-PV, EMI/RFI Filters, Noise Suppression, 520 VAC, 1.6 kA, 400x250x160mm

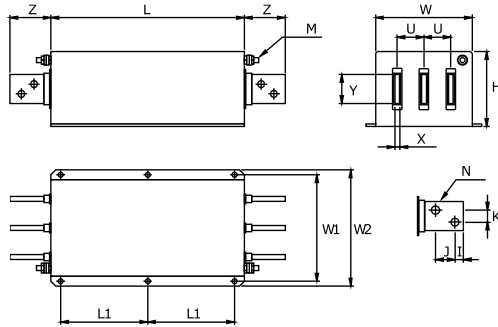

General Information	
Series:	FLLD3-PV
Style:	Chassis Mount
Description:	EMI Filter, Chassis Mount, With Y Capacitor
Features:	Three Phase, High Performance, High Voltage
Phase:	Three-phase
RoHS:	Yes
Qualifications:	IEC/EN 60939, UL 1283
Terminal Type:	Threaded Studs M12

Dimensions	
L	400mm NOM
W	250mm NOM
H	160mm NOM
L1	170mm NOM
W1	275mm NOM
W2	300mm NOM
U	60mm NOM
X	10mm NOM
Y	60mm NOM
Z	95mm NOM
I	17mm NOM
J	26mm NOM
K	26mm NOM
N	14mm NOM
M (Earth)	Threaded Studs M12

Specifications	
Voltage AC:	520 VAC
Rated Frequency:	50-60 Hz
Rated Current:	1600 A (50°C)
Rated Temperature:	50°C
Temperature Range:	-40/+100°C
Climate Category:	40/100/21
Test Voltage DC (P to P):	2250 VDC
Test Voltage DC (P to E):	3000 VDC
Power Loss:	130 W (25°C 50 Hz)
Leakage Current:	5 mA (MAX)

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	1
Component Weight:	26 kg

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.