


Features:

- High intensity
- Blue diffused (CD) or Water clear (WC) epoxy

LED Lamp Package



Electro / Optical Characteristics $I_F = 20 \text{ mA}$ $T_a = 25^\circ \text{ C}$

LED Part Number	Emitting Colour	Epoxy Type	Die Material	Wavelength		Forward Voltage V_F		Luminous intensity I_V		Luminous Flux ϕ_V	Viewing \angle $2\theta_{1/2}$
				Peak λ_P	Dominant λ_d	typical	max	min	typical		
Forge Europa											
FNL-U300B23CDSL	Blue	CD	InGaN/SiC	-	470	3.20	3.70	-	140	-	60°
FNL-U300B22CDSL	Blue	CD	InGaN/SiC	-	460	3.20	3.70	-	140	-	60°
FNL-U300B23WCSL	Blue	WC	InGaN/SiC	-	470	3.20	3.70	-	400	-	35°
FNL-U300B22WCSL	Blue	WC	InGaN/SiC	-	460	3.20	3.70	-	400	-	35°
Units				nm		V		mcd		mlm	deg

Maximum Ratings $T_a = 25^\circ \text{ C}$ (Derate above 25° C)

Characteristic	Condition	Symbol	Rating	Units
Pulse Forward Current	0.1 duty cycle @ 1KHz	I_{FP}	100	mA
DC Forward Current		I_F	25	mA
Reverse Voltage	$I_R = 100 \mu\text{A}$	V_R	5	V
Power Dissipation		P_D	85	mW
Operating Temperature		T_{opr}	- 20 to + 80	° C
Storage Temperature		T_{stg}	- 20 to + 100	° C
Lead soldering temperature	1.6 mm from body - max 3 seconds		240	° C

Note

Industry standard procedures regarding static must be observed when handling product produced with blue die material.

Package Outline


Dimensions in mm

Tol ± 0.25 mm unless stated



WARNING


This range of LEDs is produced with die having a high radiant flux. Care must be taken when viewing the product at close range as the light may be intense enough to cause damage to the human eye.

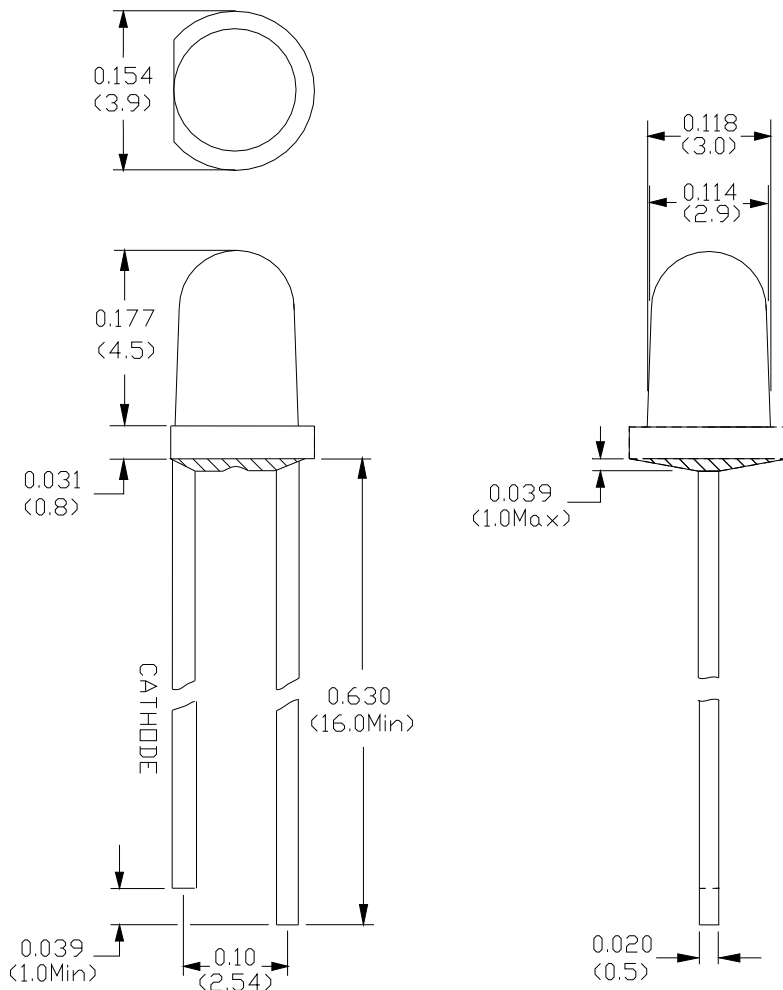

Radiation Diagrams

$T_a = 25^\circ\text{C}$

35°

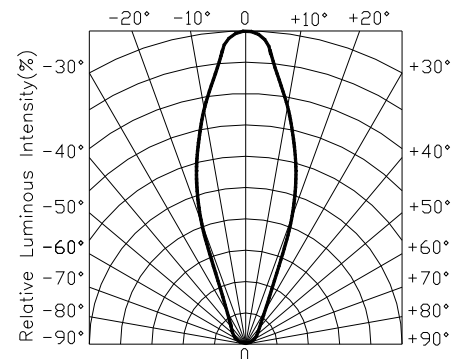

60°

