


General Application:

- High quality Fan Power Cords are designed to used with all terminal tubeaxial fans.
- Three configuration ("V", "L", "S" type) are designed to meet your specific.
- Standard cord lengths are 12", 24", 36", 48", 60", 72", 84", 96", 108", 120".
- Special lengths available upon request.
- Cord ends stripped & tinned or terminated with connections available on request.

FPC-VXXW Series

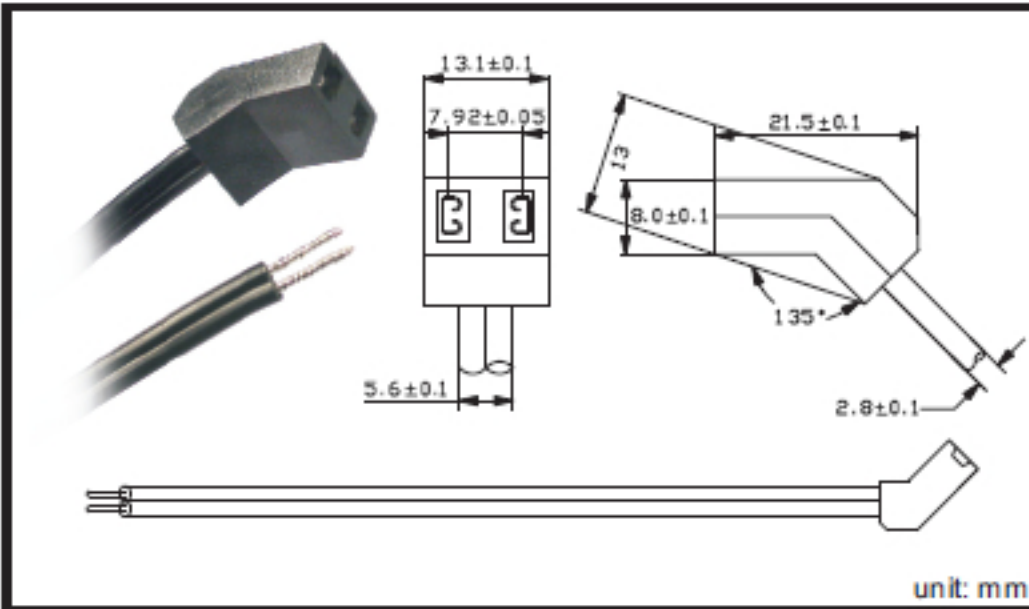


Specifications :

- UL Listed-CSA approved.
- Blunt cut end (terminated or stripped & tinned available).
- 45° Style connector (V Type).

Part Number	Cord Length	
	mm	inch
FPC-V12W	305	12
FPC-V24W	610	24
FPC-V36W	915	36
FPC-V48W	1220	48
FPC-V60W	1525	60
FPC-V72W	1830	72
FPC-V84W	2130	84
FPC-V96W	2440	96
FPC-V108W	2745	108
FPC-V120W	3050	120

FPC-VXXP Series

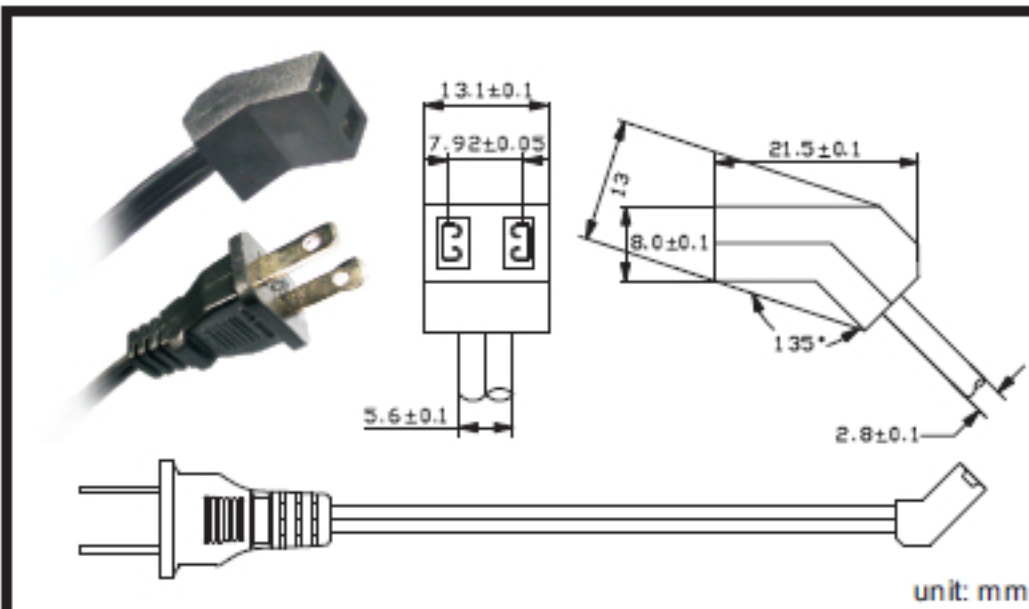


Specifications :

- UL Listed-CSA approved.
- Cordage: SPT-1(2) conductor black 105C volt.
- 45° Style connector (V Type).

Part Number	Cord Length	
	mm	inch
FPC-V12P	305	12
FPC-V24P	610	24
FPC-V36P	915	36
FPC-V48P	1220	48
FPC-V60P	1525	60
FPC-V72P	1830	72
FPC-V84P	2130	84
FPC-V96P	2440	96
FPC-V108P	2745	108
FPC-V120P	3050	120

FPC-LXXW Series

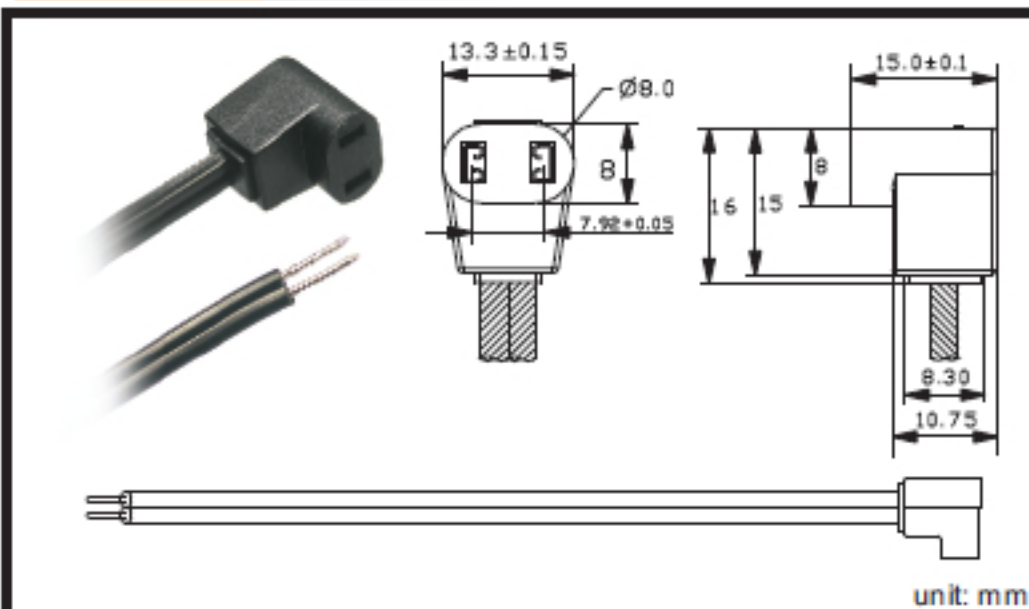

Specifications :


- UL Listed-CSA approved.
- Blunt cut end (terminated or stripped & tinned available).
- 90° Style connector (L Type).

Part Number	Cord Length	
	mm	inch
FPC-L12W	305	12
FPC-L24W	610	24
FPC-L36W	915	36
FPC-L48W	1220	48
FPC-L60W	1525	60
FPC-L72W	1830	72
FPC-L84W	2130	84
FPC-L96W	2440	96
FPC-L108W	2745	108
FPC-L120W	3050	120

General Application :

- High quality Fan Power Cords are designed to used with terminal tubeaxial fans.
- Three configuration ("V", "L", "S" type) are designed to meet your specific.
- Standard cord lengths are 12", 24", 36", 48", 60", 72", 84", 96", 108", 120".
- Special lengths available upon request.
- Cord ends stripped & tinned or terminated with connections available on request.

● FPC-LXXP Series

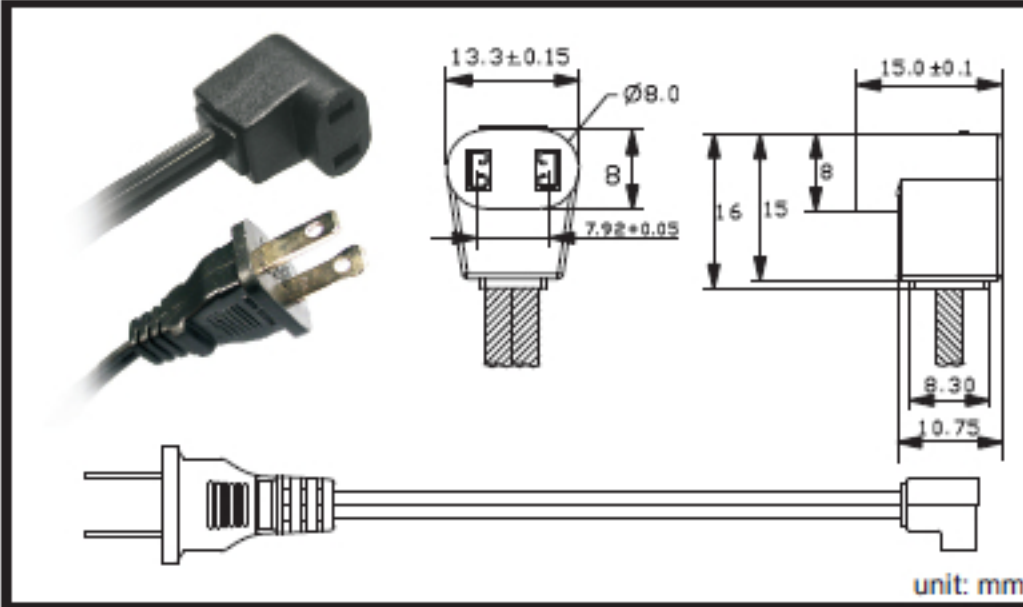


Specifications :

- UL Listed-CSA approved.
- Cordage:
SPT-1(2) conductor black
105C volt.
- 90° Style connector (L Type).

Part Number	Cord Length	
	mm	inch
FPC-L12P	305	12
FPC-L24P	610	24
FPC-L36P	915	36
FPC-L48P	1220	48
FPC-L60P	1525	60
FPC-L72P	1830	72
FPC-L84P	2130	84
FPC-L96P	2440	96
FPC-L108P	2745	108
FPC-L120P	3050	120

● FPC-SXXW Series

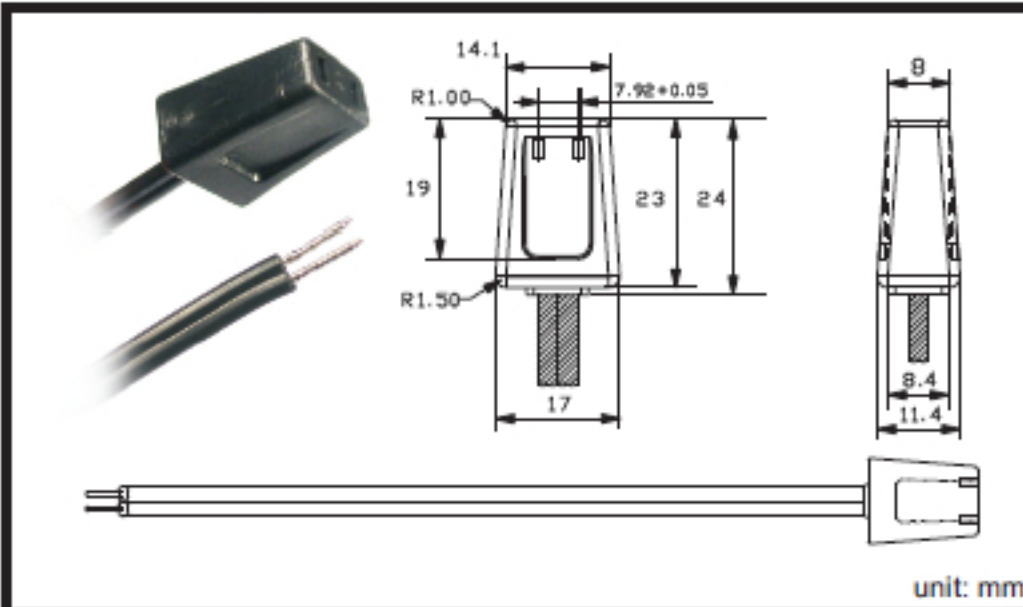


Specifications :

- UL Listed-CSA approved.
- Blunt cut end (terminated or stripped & tinned available).
- 180° Style connector (S Type).

Part Number	Cord Length	
	mm	inch
FPC-S12W	305	12
FPC-S24W	610	24
FPC-S36W	915	36
FPC-S48W	1220	48
FPC-S60W	1525	60
FPC-S72W	1830	72
FPC-S84W	2130	84
FPC-S96W	2440	96
FPC-S108W	2745	108
FPC-S120W	3050	120

● FPC-SXXP Series

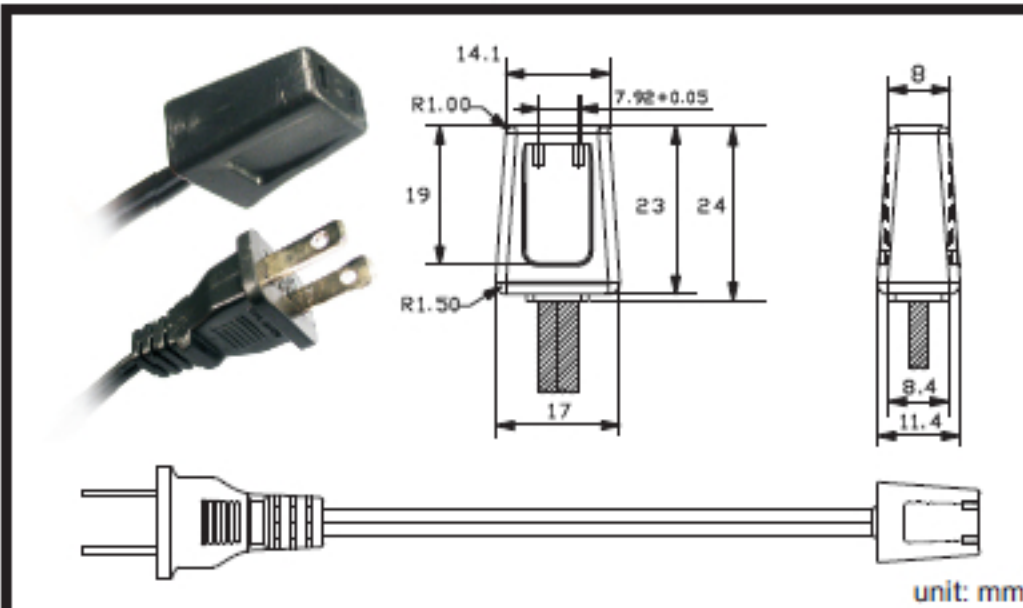

Specifications :

- UL Listed-CSA approved.
- Cordage:
SPT-1(2) conductor black
105C volt.
- 180° Style connector (S Type).

Part Number	Cord Length	
	mm	inch
FPC-S12P	305	12
FPC-S24P	610	24
FPC-S36P	915	36
FPC-S48P	1220	48
FPC-S60P	1525	60
FPC-S72P	1830	72
FPC-S84P	2130	84
FPC-S96P	2440	96
FPC-S108P	2745	108
FPC-S120P	3050	120

General Application:

- High quality Fan Power Cords are designed to used with terminal tubeaxial fans.
- Three configuration ("V", "L", "S" type) are designed to meet your specific.
- Standard cord lengths are 12", 24", 36", 48", 60", 72", 84", 96", 108", 120".
- Special lengths available upon request.
- Cord ends stripped & tinned or terminated with connections available on request.

FPC-VXXW-7D2 Daisy Chain Series

Technical drawing showing dimensions: 13.1±0.1, 7.92±0.05, 5.6±0.1, 21.5±0.1, 8.0±0.1, 13, 135°, 2.8±0.1. Unit: mm.

Specifications :

- UL Listed-CSA approved.
- Blunt cut end (terminated or stripped & tinned available).
- 45° Style connector (V Type).
- Additional connectors: 2 to 12.
- Available types of connector:

L type S type V type

Part Number	Cord Length	
	mm	inch
FPC-V12W-7D2	305	12
FPC-V24W-7D2	610	24
FPC-V36W-7D2	915	36
FPC-V48W-7D2	1016	48
FPC-V60W-7D2	1270	60
FPC-V72W-7D2	1830	72
FPC-V84W-7D2	2130	84
FPC-V96W-7D2	2440	96
FPC-V108W-7D2	2745	108
FPC-V120W-7D2	3050	120

FPC-VXXP-7D2 Daisy Chain Series

Technical drawing showing dimensions: 13.1±0.1, 7.92±0.05, 5.6±0.1, 21.5±0.1, 8.0±0.1, 13, 135°, 2.8±0.1. Unit: mm.

Specifications :

- UL Listed-CSA approved.
- Cordage: SPT-1(2) conductor black 105C volt.
- 45° Style connector (V Type).
- Additional connectors: 2 to 12.
- Available types of connector:

L type S type V type

Part Number	Cord Length	
	mm	inch
FPC-V12P-7D2	305	12
FPC-V24P-7D2	610	24
FPC-V36P-7D2	915	36
FPC-V48P-7D2	1220	48
FPC-V60P-7D2	1525	60
FPC-V72P-7D2	1830	72
FPC-V84P-7D2	2130	84
FPC-V96P-7D2	2440	96
FPC-V108P-7D2	2745	108
FPC-V120P-7D2	3050	120

Power cord combination available options

