

Type FSX Fast Acting Glass Tube Fuse Automotive Glass



www.optifuse.com (619) 593-5050

Fuse Size: 1/4" x 1" (6.3 x 25.4mm)

Ampere Rating: 250mA ~ 30A

Voltage Rating: 125V / 250V

Electrical Characteristics:


100%	135%	200%
Min.	Max.	Max.
4h	1h	120s

Agency Standards and Listings:



According to UL248-14

Mechanical Dimensions: Inches[mm]

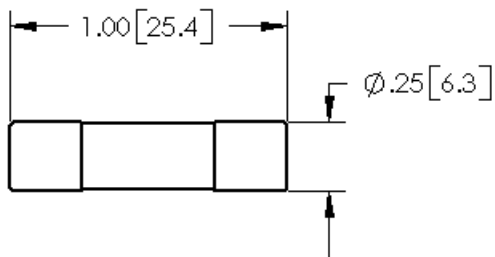

Part Number	Ampere Rating	Interrupt Rating	Voltage Rating	UL US	CUL US	PSE JET
FSX-250mA	250mA	10KA @125VAC 35A @250VAC	125V/250V	•		
FSX-300mA	300mA			•		
FSX-400mA	400mA			•		
FSX-500mA	500mA			•		
FSX-600mA	600mA			•		
FSX-750mA	750mA			•		
FSX-800mA	800mA			•		
FSX-1A	1A			•		•
FSX-1.125A	1.125A	10KA @125VAC 100A @250VAC		•		•
FSX-1.25A	1.25A			•		•
FSX-1.4A	1.4A			•		•
FSX-1.5A	1.5A			•		•
FSX-1.6A	1.6A			•		•
FSX-1.8A	1.8A			•		•
FSX-2A	2A			•		•
FSX-2.25A	2.25A			•		•
FSX-2.5A	2.5A		•		•	
FSX-3A	3A		•		•	
FSX-3.2A	3.2A	•		•		
FSX-3.5A	3.5A	•		•		
FSX-4A	4A	10KA @125VAC 200A @250VAC	•		•	
FSX-4.5A	4.5A		•		•	
FSX-5A	5A		•		•	
FSX-6A	6A		•		•	
FSX-6.3A	6.3A		•		•	
FSX-7A	7A		•		•	
FSX-8A	8A		•		•	
FSX-9A	9A		•		•	
FSX-10A	10A	•		•		
FSX-12A	12A	200A @125VAC 200A @250VAC		•	•	
FSX-15A	15A			•	•	
FSX-17.5A	17.5A			•	•	
FSX-20A	20A			•		
FSX-25A	25A	100A @125VAC	125V	•		
FSX-30A	30A		•			

	-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
	-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.