

COIL: @ 25°C


| | |
|-----------------|----------------------------|
| RESISTANCE | 675 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.0 VDC |
| MUST RELEASE | 10.1 VDC MAX, 2.3 VDC MIN. |

ENVIRONMENT:

| | | | | | | |
|-------------|-----|--------|-------|--------------|----|-----|
| VIBRATION | 10 | CPS TO | 2000 | CPS @ | 20 | g's |
| SHOCK | 100 | g's | 6 ± 1 | MS. DURATION | | |
| TEMPERATURE | -65 | °C TO | +125 | °C | | |

NOTES: OPERATE & RELEASE TIME 6 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

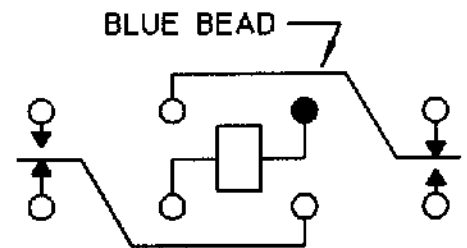

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/9/95 CK. 2/9/95

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M5757/10-040

TYPE "FW" RELAY

FW1220G06